


KONICA C35



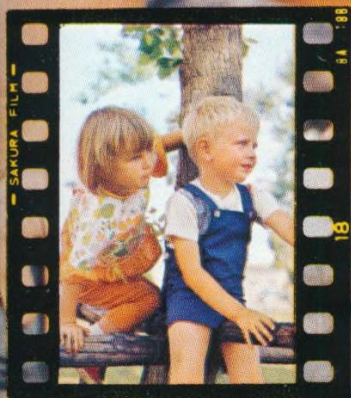

KONICA C35

The fun camera that always goes with you.

Full-size prints or standard slides Black & White or Color

The camera that's pocket-size, pocket-light.

Yet with all the features usually found only in larger cameras.


Uses standard 35mm film available everywhere in day-light-loading 20- or 36-exposure cartridges.

Your Konica C35 will give you the most beautiful pictures you've ever taken.

Color enlargements and slides you will be proud to show.

Sharp, Clear, Sparkling, Every time.

Equipped with the superb Hexanon f2.8, 38mm medium wide angle lens that is Color Dynamic Coated to end ghost images, reduce flare, and assure high fidelity color reproduction.

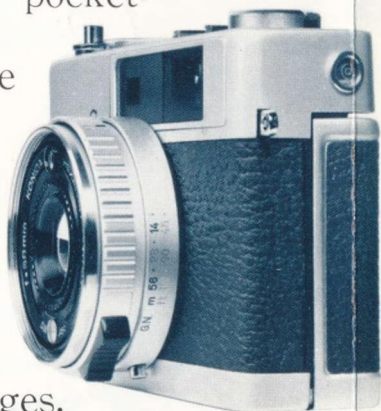

All of the features
None of the bulk

Rec'd 7-31-72

Post 60 - PHOTO BOX



CdS Cell

(Automatic Exposure Control)

Perfect exposure assured with sensitive CdS cell metering and Electric Eye systems. Lens aperture and shutter speed are set automatically. Just aim, focus and press the shutter button.



Features of the Konica C35

LENS


Hexanon 38mm f/2.8 4-element, 3-group design. Lens has Konica's exclusive Color Dynamic Coating which practically eliminates flare and glare.

SHUTTER

Copal B Mat Programmed Automatic Shutter with combined behind-the-lens shutter and aperture blades. Shutter speeds and lens openings continuously variable and automatically selected. Shutter speed range 1/30 to 1/650 sec. plus B ("Bulb") time exposure (only at full lens opening). "X" flash synchronization at 1/25 sec. for flashcubes, AG-1 bulbs, or strobe. Built-in self-timer.

ELECTRIC EYE

Automatic exposure adjustment controlled by sensitive CdS cell mounted



Combined Range/Viewfinder

A bright frame viewfinder combined with a long-base, double-image rangefinder. Makes needle sharp focusing and precise composition effortless. Viewfinder indicators show camera settings and warn of over-or underexposure.



CLOSE-UP PHOTOGRAPHY

Slip on the accessory Auto-Up attachment and you're ready for dramatic close-ups as near as 1 1/2 feet, with rangefinder focusing



in lens barrel. Light acceptance angle matched to lens angle of view. Exposure System selects and sets optimum combination of lens opening and shutter speed from EV 8 (f/2.8, 1/30 sec.) to EV 17 (f/14.3, 1/65 sec.) with ASA 100 film. Film speed scale ASA 25-400 (DIN 15-27).

RANGEFINDER

Coupled, double-image superimposed type rangefinder combined with viewfinder. Effective base line 12mm. Closest focusing distance 3.3 feet.

FILM ADVANCE

Lever operated, single stroke rapid film advance with automatic cocking frame counting, and double-exposure prevention. Folding film rewind crank. Self-setting frame counter.



FLASH

Dual flash contacts for cordless or cord-type flash units. X synchronization

All of the features
None of the bulk

Rec'd 7-31-72

Post 60 - PHOTO
BOX

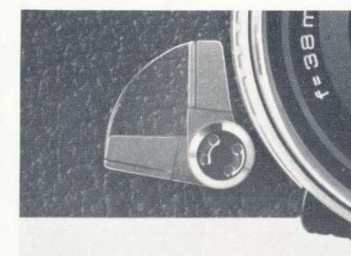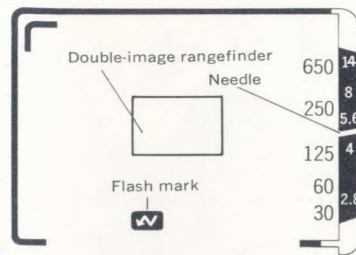

CdS Cell

(Automatic Exposure Control)

Perfect exposure assured with sensitive CdS cell metering and Electric Eye systems. Lens aperture and shutter speed are set automatically. Just aim, focus and press the shutter button.

Combined Range/Viewfinder

A bright frame viewfinder combined with a long-base, double-image rangefinder. Makes needle sharp focusing and precise composition effortless. Viewfinder indicators show camera settings and warn of over-or underexposure.

CLOSE-UP PHOTOGRAPHY

Slip on the accessory Auto-Up attachment and you're ready for dramatic close-ups as near as 1½ feet, with rangefinder focusing.




FLASHMATIC SYSTEM

Keep shooting when the sun goes down. Flashmatic makes it easy. When set on 'flash,' the lens is adjusted automatically as you focus for perfect pictures every time.

SELF-TIMER

Why be left out? Get into the picture with a flick of the self-timer. It gives you about 10 seconds to join the family . . . and smile!

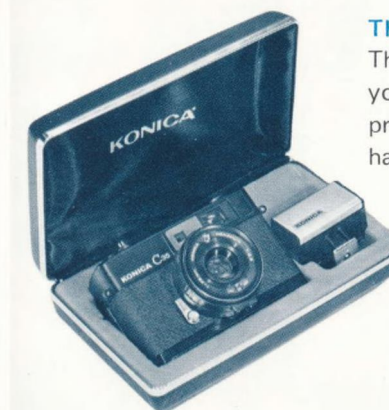

THE IDEAL GIFT

The Konica C35 is available in your choice of satin chrome or professional black and in a handsome presentation case, complete with the Konica Cubeflash.

at 1/25 sec. Flashmatic system adjusts camera automatically for proper lens opening and focusing range.

FILM

Accepts standard 35mm cartridges. Full-frame (24 x 36mm) negative format.

FILTERS

Lens mount threaded for 46mm screw-in filters. Automatic filter factor compensation.

DIMENSIONS

4 ⅝" x 2 ⅜" x 2". Weight 13 ounces.

Features of the Konica C35

LENS

Hexanon 38mm f/2.8 4-element, 3-group design. Lens has Konica's exclusive Color Dynamic Coating which practically eliminates flare and glare.

SHUTTER

Copal B Mat Programmed Automatic Shutter with combined behind-the-lens shutter and aperture blades. Shutter speeds and lens openings continuously variable and automatically selected. Shutter speed range 1/30 to 1/650 sec. plus B ("Bulb") time exposure (only at full lens opening). "X" flash synchronization at 1/25 sec. for flashcubes, AG-1 bulbs, or strobe. Built-in self-timer.

ELECTRIC EYE

Automatic exposure adjustment controlled by sensitive CdS cell mounted

in lens barrel. Light acceptance angle matched to lens angle of view. Exposure System selects and sets optimum combination of lens opening and shutter speed from EV 8 (f/2.8, 1/30 sec.) to EV 17 (f/14.3, 1/650 sec.) with ASA 100 film. Film speed scale ASA 25-400 (DIN 15-27).

RANGEFINDER


Coupled, double-image superimposed type rangefinder combined with viewfinder. Effective base line 12mm. Closest focusing distance 3.3 feet.

FILM ADVANCE




Lever operated, single stroke rapid film advance with automatic cocking, frame counting, and double-exposure prevention. Folding film rewind crank. Self-setting frame counter.

FLASH

Dual flash contacts for cordless or cord-type flash units. X synchronization

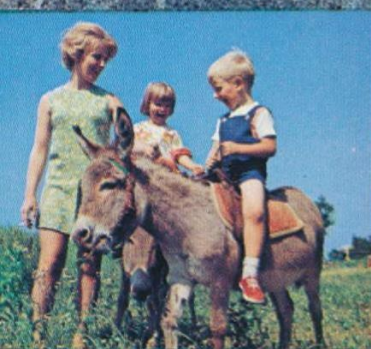

Light
&
Compact

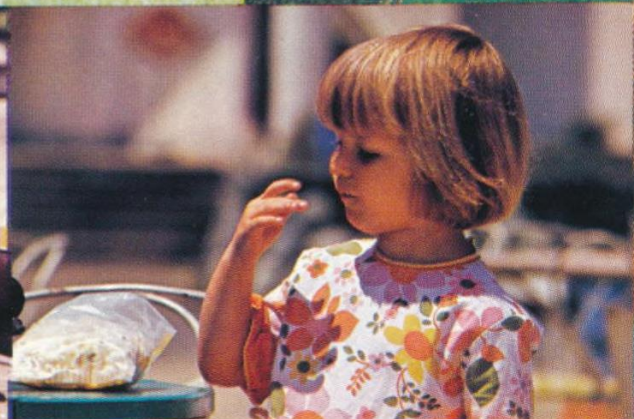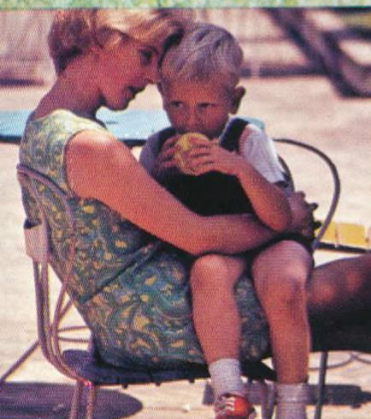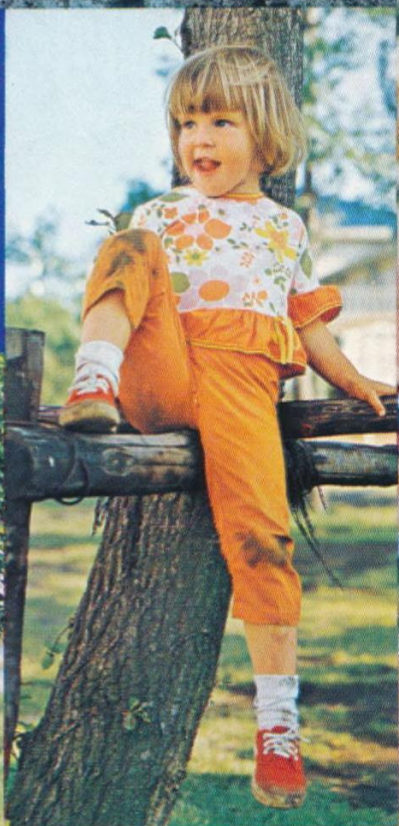



Orgin archive.org