



LUXMAN 1500

SERVICE MANUAL

R 1500 CIRCUIT DESCRIPTION

Power Supply

The mains input to the Receiver goes via a 2 pole power switch to the mains transformer which has four secondary windings:

1. A 11 volt winding for the panel lamps.
2. A 25 volt winding for the speaker protection circuit.
3. A 75 volt centre tapped winding providing after full-wave rectification $\oplus$ and $\ominus$ supplies for the audio power amp section.
4. A 30-0-30 volt winding to provide 45 volts DC for the preamp and tuner sections. A potential divider using a zener diode which is used to obtain from 45 volts a 12 volt DC supply for the AM and FM tuner sections. The 2SC1382 transistor is used as a ripple filter providing 40 volts to the audio preamps. There are fuses in all the secondaries for transformer protection. A fuse is used as well in the preamp.

POWER AMPS

PNP transistors are used as a differential comparator; the audio input is fed to the first transistor and the feedback to the other. NPN metal can transistors are used as active loads for the differential comparator, the one NPN has its collector to ground, the other being the voltage amplifier for the entire output stage, which uses a PNP driver and a PNP output in the negative side connected as a darlington emitter follower configuration, and an NPN driver and NPN output is used in the positive side. These 4 transistors form what is known as a fully complementary symmetrical output stage.

Their input bases are bias with a 3 diode device (SV03) and a bias trim pot for idling current set (50 mA), 2 resistors and a condenser form the boots-trap constant current load for the voltage amplifier to drive the output stage. The junction of the emitter resistors is as a feed point for the differential comparator, and at the same time goes via a relay to the speaker selector switch to the speaker terminals and headphone socket via 680 ohm.

The headphone socket is always active regardless of speaker selection. PNP and NPN transistors are used to sense output current and voltage and if the output is short circuited will limit the drive to the output devices, thereby protecting the amplifier from overload.

Input sensitivity of the power amp is defined by the ratio of R811, R813 which = 700 mv for full output, and the low frequency roll off is determined by the reactance of C806 to R811 which in this circuit is 10Hz.

PRE AMP

Phono RIAA equalization amplifier 2 phono inputs can be selected both with the same input sensitivity. The RIAA

amplifier uses a NPN, PNP and NPN direct coupled triplet of transistors which are selected low noise types, the equalization and DC feedback are taken from the emitter of the NPN back to the emitter of the input NPN transistor. This amp has a gain of 36 db (2.3mv – 150mv) at 1 KHz. The linearity of this direct coupled combination offers high overload capabilities (100 mv at 1 KHz). The 150mv nominal level is at the same level as the other functions. The Mic amplifier uses basically the same circuit without equalization, being flat from 20 – 50 KHz with 38 dB gain. The Function Switch selects AM, FM Aux 1 and 2 and Phono 1 and 2 the output of which can be mixed with the input from the mic amplifier. This audio then goes to the tape monitoring function switches.

There are two switches for the tape functions, these are mounted on the switch printed circuit board. The left switch enables in the "up" position dubbing from tape 1 – 2 and in the "lower" position from Tape 2 – 1, when "centre", it is off. The right-hand switch enables monitoring from Tape 1 in the up position, tape 2 in the lower and programme source in the centre position.

The switch for the loudness works in conjunction with the volume control so that its greatest effect is at low volume settings, the audio then passes on the tone control circuit.

LINEAR EQUALIZER and TONE CONTROL

The required selection will then go to the tone control printed circuit board which contains 2 NPN transistors direct coupled linear equalizer amp and 2 NPN transistor amp for tone control. The income signal is linear equalized by selecting the feedback components of this amp. The audio then passes on the tone control circuit. Two direct coupled NPN transistors are used in the Lux-type active bass and treble control, operating in a virtual earth mode with the input at the boost point of the controls and the base of the transistor fed from the slider of the bass control via C741 and C742, the emitter being the feedback point to the controls and providing the output which is at unity gain with respect to the input, to drive the active filter circuit. Included on the tone control board are two switches for changing to bass and treble turn over frequency points.

FILTER BOARD

The Sallen Keyes type filter circuit has components selectable by the front panel low and high cut switches to provide a 12 dB/oct. roll off. The output is sufficiently low impedance to drive the power amp circuit.

SPEAKER PROTECTION

Speaker protection relay is provided in this receiver to protect speakers from damage. Speaker output terminals must always have no significant residual DC voltage, but if some plus or minus voltage appears these terminals, the

relay operates and cuts speakers connection from output stage.

This circuit is mounted on the power supply board.

AM SECTION

A superhet design using a tuned RF amplifier, a mixer/local oscillator and two stages of IF amplification at 455 KHz. A ferrite rod antenna with 3 windings is used, the first winding is connected to the external antenna terminal, the second is connected to the first section of a 3 gang tuning condenser, the last winding feeding the base of the RF transistor amplifier. A tuned RF transformer is used to couple the collector to the base of the self-mixing oscillator. The oscillator operates at 455 KHz above the incoming signal to produce the intermediate frequency, which is passed through a first IFT and then amplified by two further transistor IF stages. The audio is then recovered by a germanium diode detector and passed on to the pre amp via noise filter and selector switch, and the signal strength meter is driven from the audio detector output. A silicon diode is used to provide an A.G.C. voltage which controls the gain of the first IF amplifier; the collector of this provides an amplified AGC back to the emitter of the RF transistor. This method used provides an audio output relatively constant with varying R.F. signal strength.

FM SECTION

An input balun transformer matches either 300 ohm or 75 ohm antenna input to the Front end, which has a 4 gang tuning capacitor and consists of a dual gate FET for the tuned RF amp feeding, via a two-section transformer, the bi-polar transistor mixer.

A bipolar transistor "Colpitts" oscillator operates at 10.7 mcs above the incoming signal. C 116 is a negative temperature coefficient condenser to stabilize the oscillator to less than 25 KHz per 10 deg. Celsius. The output is then fed via a 1 pf condenser to the mixer, the resultant 10.7 MHz passes through a double tuned IFT included in the front end module.

The front end module is well shielded to prevent any spurious radiation, and to offer good image and selectivity responses.

IF

The IF strip is contained on the same printed circuit board as the stereo multiplex decoder and muting circuits.

The 10.7 MHz IF intermediate frequency is amplified by a transistor then passed through a ceramic filter with a side chain A.G.C. amplifier to provide a D.C. control voltage (A.G.C.) for the RF input FET to improve the front end overload capabilities. The main chain is again amplified by a further transistor and ceramic filter providing a wide pass band with steep sides.

A differential IC with a built-in constant current source provides partial limiting, this passing through an IF transformer into the final multistage I.C. which provides hard limiting characteristics for the ratio discriminator, which provides the composite audio output for the multiplex.

A second side chain amplifier and rectifier monitors the input to the first I.C. to provide a signal strength control command as well as driving the signal strength meter.

At the audio output when the receiver is off-tuned from centre either a positive or negative D.C. will appear which is monitored both by a centre tune meter and a bi-phase detector using one NPN and one PNP transistor which with another NPN forms an "AND" gate for one of two "shmitt" trigger circuits. The other shmitt trigger receives a command from the signal strength circuit previously mentioned. The collectors of the final transistor in each circuit form a "wired OR" gate which via the muting "On-Off" switch on the front panel controls the gate on the FET audio mute circuit if it is enabled. The composite audio passes on to the I.C. multiplex, which will derive the L and R audio output, the IC also is connected directly to the stereo indicator lamp.

The Left and Right go through L.C. type rejection filters to remove the 19 KHz pilot. These are both in one moulding.

Finally, a one transistor amplifier is used in each channel to raise the level to 400 m volts for the audio pre amp. A de-emphasis switch has been incorporated on the P.C. board for selecting either 75 μ sec. (American) or 50 μ sec. time constant.

R-1500 ALIGNMENT PROCEDURE

The alignment procedure described in each chart may be performed independently, without affecting the others. Warm up the signal generators for at least 15 minutes to make certain that they are stabilized at their operating temperature particularly generators containing vacuum tubes. Consult the instruction manual supplied with the particular test instrument for specific information concerning connection and operation.

The test equipment listed here is intended only as a guide, but alternate instruments should be of similar quality.


The following instruments are required for a complete alignment of the tuner.

1. Measurement instruments and tools

Signal source	1) FM signal generator (FMSG)	Meguro MSG-285A or equivalent
	2) Sweep generator (SWG)	JRC NJM-5217C or equivalent
	3) AM signal generator (AMSG)	Meguro MSG-221C or equivalent
	4) FM stereo modulator (MPXSG)	Sound technology-1000A or equivalent
	5) Audio oscillator (AFO) 10-100KHz 0.2% accuracy, Dist. 0.1%	Oscillation freq. range 10-100,000Hz, calibration error within 0.2%, distortion 0.1%
Output indicator	6) AM standard loop antenna	Meguro MLA-1001B or equivalent
	7) Oscilloscope (CRO) Mid bandwidth 5MHz	Iwatsu SS-5057V or equivalent
	8) Distortion meter (HDM)	Shibasoku 796E or equivalent
	9) AC volt meter (ACVTVM)	Kikusui 164 or equivalent
	10) DC volt meter (DCVTVM)	Kikusui 107A or equivalent
Tools	11) Hex head alignment tool	
	12) Thin plastic shaft alignment tool	

2. General alignment conditions

- 1) The normal test voltage is within 10% of what is indicated on the receiver with less than 2% harmonic distortion.
- 2) Unless otherwise specified, the normal ambient temperature is 15–25°C and humidity 55–75%. But if this is not possible, 5–35°C, 45–85% will provide acceptable results.
- 3) FM dummy antenna shall be as follows if not otherwise specified. The output voltage of the signal generator is 1/4 of the unloaded terminal voltage.

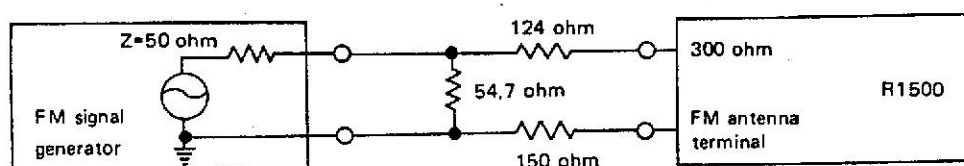

- 4) Connect the low side of signal source and the output indicator to the chassis ground as close as possible to the high side connection unless otherwise specified.
- 5) The 10.7MHz marker used in each section of the alignment should be the same.
- 6) Marker insertion and amplitude should not distort the oscilloscope trace.
- 7) The AM standard loop antenna should be set above the ferrite loopstick antenna.
- 8) The output level of the sweep generator is measured by the output attenuator regardless of its terminated impedance.
- 9) FM modulation is 100% with ± 75 KHz
- 10) All tuner audio output measurement are at TAPEOUT 1.

Step.	Signal Source Connected to	Set signal to	Set Radio Dial to	Output Indicator Connected to	Adjust	Adjust for	
1	Set selector switch to "FM", muting switch to "off", stereo only switch to "off" and turn power switch "on"						
2				DC VTVM PB351 (17)		Check that voltage is between 11.5 ~ 12.3V	
3				Refer circuit diagram		Check each part voltage if necessary	
4	Sweep generator PB353 (1)	$\pm 400\text{kHz}$ sweep centred at 10.7MHz generator output level 90-100dB	Quiet point on band	Oscilloscope PB353 TP-2		Due to the fixed frequency of the ceramic filters, find the centre frequency of a symmetrical band pass response. Make a note of it (for example 10.75MHz)	
5				Oscilloscope PB353 TP-3	T201 T202 core	Symmetrical response centred at the frequency noted by step 4	
6				Oscilloscope PB353 TP-4	T204 core		
7				Oscilloscope PB353 (19)	T203 top core T203 bottom core	Maximum linearity and amplitude of "S" curve centred at the frequency noted by step 4	
8	FM signal generator Across FM antenna terminals (300 Ω) through matching network	Reduce the output level to zero (interstation receiving condition)	93MHz		T203 top core	Centre indication of the tuning meter	
9		93MHz at 400Hz 100% modulation, output level 1mV		Oscilloscope Distortion meter AC VTVM TAPEOUT 1	T203 bottom core	Minimum distortion. At the minimum distortion setting, the output level must be within 1/2dB of peak output.	
10	Repeat steps 8 and 9 as necessary to obtain maximum output level and minimum distortion at centre point of tuning meter and the meter must also shows centre at interstation state.						
11	FM signal generator Across FM antenna terminals (300 Ω) through matching network	88MHz at 400Hz 30% modulation, generator output level 1mV	88MHz	Oscilloscope Distortion meter AC VTVM TAPE OUT 1	VR202	90% of full scale on signal meter reading	
12					T204 core	The signal strength meter must indicate its maximum, at the same time as the centre tune meter indicates centre	
13					L104	Accurate indication of pointer on dial to within ± 1 pointer width	
14		108MHz at 400Hz 30% modulation, generator output level 1mV	108MHz		TC104		
15		88MHz at 400Hz 30% modulation, generator output level 5 ~ 10 μV	88MHz		T101 top core T101 bottom core	Maximum indication of signal strength meter	
16					L101		

Step.	Signal Source Connected to	Set signal to	Set Radio Dial to	Output Indicator Connected to	Adjust	Adjust for
17	FM signal generator Across FM antenna terminals (300Ω) through matching network	88MHz at 400Hz 30% modulation, generator output level 5 ~ 10μV	88MHz	Oscilloscope Distortion meter <u>AC VTVM</u> TAPE OUT 1	L102	Maximum indication of signal strength meter
18					L103	
19		108MHz at 400Hz 30% modulation, generator output level 5 ~ 10μV	108MHz		TC101	
20					TC102	
21					TC103	
22	Repeat steps 13 ~ 21 as necessary to obtain correct tuning on dial scale and the maximum indication of signal meter with uniform sensitivity throughout the band					
23	FM signal generator Across FM antenna terminals (300Ω) through matching network	Reduce the output level to zero (interstation receiving condition)	93MHz	Oscilloscope Distortion meter <u>AC VIVM</u> TAPE OUT 1	T203 top core	Center indication of the tuning meter
24		93MHz at 400Hz 100% modulation, output level 1mV			T203 bottom core	Minimum distortion. At the minimum distortion setting, the output level must be within 1/2 dB of peak output.
25		88MHz at 400Hz 100% modulation	88MHz			IHF maximum usable sensitivity which is the minimum output level of FMSG required for distortion and noise to be -30dB of total output
26		108MHz at 400Hz 100% modulation	108MHz			
27	Set muting switch "on" & turn muting level to full clockwise					
28	FM signal generator Across FM antenna terminals (300Ω) through matching network	98MHz at 400Hz 100% modulation generator output level 4μV	98MHz	Oscilloscope <u>AC VTVM</u> TAPE OUT 1	VR201	Fix VR201 at the point where output signals appear
29		98MHz at 19KHz 3 ~ 4% modulation generator output level 1mV		Oscilloscope PB351 CP-5	T205 core	Maximum amplitude of oscilloscope trace
30					T207 core	
31					T206 core	
32	Repeat steps 29 ~ 31 as necessary for alignment of perfect tuning					
33	FM signal generator Across FM antenna terminals (300Ω) through matching network	98MHz at 19KHz 10% (L-R) 400Hz 45% output level 1mV	98MHz	Oscilloscope <u>AC VTVM</u> TAPE OUT 1	T206 core	To obtain peak output voltage
34		98MHz at 19KHz 10% L (or R) stereo 90% modulation output level 1mV			VR203	Maximum separation

Step.	Signal Source Connected to	Set signal to	Set Radio Dial to	Output Indicator Connected to	Adjust	Adjust for
35	Set selector switch to "AM"					
36	Connect TP2 and TP3 on PB460					
37	Sweep generator PB460 (1) through 1μF mylar capacitor	±20 ~ 25KHZ sweep centred at 455KHz generator output level 3 ~ 10mV	Quiet point on band near 1600KHz	Oscilloscope AC VTVM PB460 (7)	T403 top core	Maximum symmetrical response centred at 455KHz
38					T403 bottom core	
39					T404 top core	
40					T404 bottom core	
41					T405 core	
42	Disconnect TP2 and TP3 connected at step 36					
43	Adjust VR401 to mechanical center position					
44	AM signal generator Standard radiating loop antenna placed near AM built in antenna	600KHz at 400Hz 30% modulation, field strength 50dB/m	600KHz	Oscilloscope AC VTVM TAPE OUT 1	T402 core	Accurate indication of pointer on dial to within ± 1 pointer width
45					L001 core	Maximum reading on AC VTVM
46					L401 core	
47		1400KHz at 400Hz 30% modulation, field strength 50dB/m	1400KHz		TC003	Accurate indication of pointer on dial to within ± 1 pointer width
48					TC001	Maximum reading on AC VTVM
49					TC002	
50	Repeat steps 44 ~ 49 as necessary to obtain exact tuning on dial scale and maximum sensitivity					
51	AM signal generator Standard radiating loop antenna placed near AM built in antenna	1000KHz at 400Hz 30% modulation, field strength 90dB/m	1000KHz	Oscilloscope AC VTVM TAPE OUT 1	VR401	To obtain 100mV at TAPE OUT 1

SEMICONDUCTOR SPECIFIC CHART

TRANSISTORS (Ta = 25°C)

TYPE	MAX. RATING			CHARACTERISTICS											
	Pc W	Vceo V	Ic mA	hfe				fT MHz			NF				
				min	max	Ic mA	Vce V	typ	Ic mA	Vce V	max dB	Ic mA	Vce V	fre Hz	Zg Ω
2SA620K	0.2	70	50	150	320	1	6	120	1	6	0.7	0.1	6	1K	10K
2SA640L	0.25	45	30	225	450	0.5	3	100	1	3					
2SA679Y	100	120	12000	70	140	2000	5	6	2000	5					
2SA733P,Q	0.25	40	100		270	1	6	180	10	6	20	0.3	6	100	10K
2SA762-22	23	130	2000	100	240	400	2	80	100	2					
2SC372Y	0.2	30	100	120	240	2	12	200	1	10					
2SC381R	0.1	30	20	40	80	1	6	350	1	6					
2SC535	0.1	20	20					700	5	6	5.5	1	6	100M	50
2SC13820,Y	0.8	80	750	70	240	150	2	100	150	2					
2SC1079Y	100	150	12000	70	140	2000	5	9	2000	5					
2SC945P,Q	0.25	40	100	135	270	1	6	300	10	6	20	0.5	6	1K	500
2SC1103A	0.8	250	100	100	200	10	10	80	10	30					
2SC1000GR	0.2	50	100	200	400	2	6	80	1	6	3	0.1	6	100	10K
2SC1345E	0.2	50	100	400	800	2	12	230	2	12	1	0.1	6	1K	10K
2SC1431-22	23	130	2000	100	240	400	2	80	100	2					

FIELD EFFECT TRANSISTOR (Ta = 25°C)

TYPE	MAX. RATING			CHARACTERISTICS						
	Pch mW	VG1SS, VG2SS V	IG1, IG2 mA	IDSS mA			Crss pF	NF		
				min	max	Vds V		typ	Vds V	
3SK30	200	-15	10	3	20	10	0.6	10	2.0	10
2SK19	200	-18	10	3	24	10	0.8	10	2.0	10
2SK30A	100	-50	10	0.6	1.4	10	2.6	10	0.5	15

DIODES (Ta = 25°C)

TYPE	MAX. RATING			CHARACTERISTICS			
	IF A	Vr V	Surge A	If		Ir	
				mA	Vf V	μA	Vr V
IS188	0.05	-35	0.5	0.004	0.1	-75	-10
IS1554	0.3	-50	1	100	1.0	0.5	-50
KB265	0.03			0.003	1.31		
KB-165	0.05	3		0.003	0.65		
SV-03	0.15			1	1.8	10	-100
WZ-120	0.04	-12		20	0.8	0~40mA	-12
CZ-117	0.085	-11.7		20	0.85	0~85mA	-11.7
IN4001	1	-50	30	1000	1.1	5	-50
IN4003	1	-200	30	1000	1.1	5	-200
HI-FI SPECIAL	3	-400	150	3000	1.25	5	-400

INTEGRATED CIRCUIT SPECIFIC CHART

TA7061AP


MAXIMUM LIMITS OF DEVICE (Ta = 25°C)

	Symbol	Rating	Unit
Max. Vcc	Vcc	15	V
Input voltage (terminals 6-7)	VI	±3	V
Max. dissipation	PD	300	mW
Operating temperature (Vcc = 7.5V)	Topr	-30~75	°C
Storage temperature	Tstg	-55~125	°C


ELECTRICAL SPECIFICATION (Ta = 25°C)

	Symbol	Condition of measurement	Min.	Typ.	Max.	Unit
Current vs supply Vcc	Icc	Vcc = 6.0V		11	13	mA
		Vcc = 7.5V	7	8.5		
Gain (dB)	Gp	Vcc = 7.5V, f = 10.7MHz	66	69	72	dB
Input impedance	RI	Vcc = 7.5V, f = 10.7MHz		5		KΩ
Input capacitance	CI			6		pF
Output impedance	Ro	Vcc = 7.5V, f = 10.7MHz		10		KΩ
Output capacitance	Co			5		pF
Input voltage for full limiting	VI (lim)	Vcc = 7.5V, RL = 1KΩ		600		μV

EQUIVALENT CIRCUIT

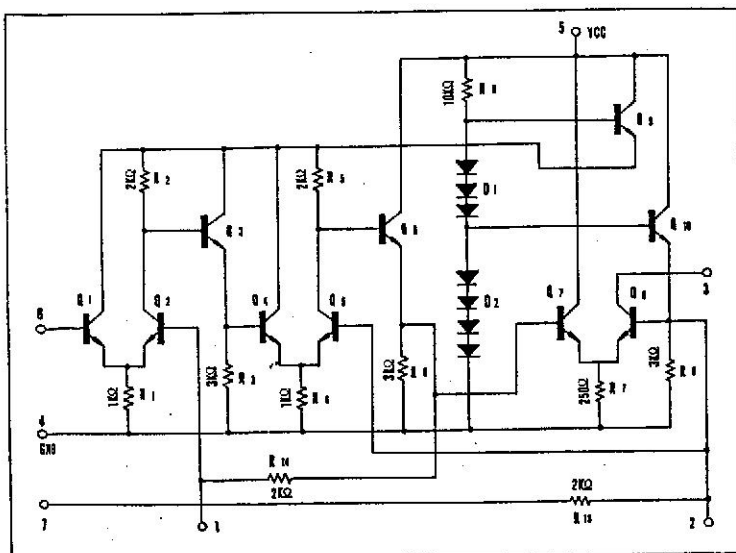

PIN CONNECTOR

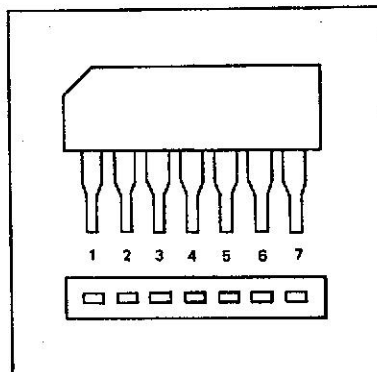

LM703


MAXIMUM LIMITS OF DEVICE ($T_a = 25^{\circ}\text{C}$)

	Symbol	Rating	Unit
Max. supply voltage	V_{cc}	20	V
Output collector voltage	V_7	24	V
Input voltage	V_{3-5}	± 5.0	V
Max. dissipation	PD	200	mW
Operating temperature	T_a	$0 \sim 70$	$^{\circ}\text{C}$
Storage temperature	T_{stg}	$-65 \sim +150$	$^{\circ}\text{C}$


ELECTRICAL SPECIFICATION ($T_a = 25^{\circ}\text{C}$ $V_{cc} = 12\text{V}$)

	Symbol	Condition of measurement	Min.	Typ.	Max.	Unit
Power dissipation	PD	$e_{in} = 0$		71	96	mW
Output collector current	I_7	$e_{in} = 0$	1.5	2.5	3.3	mA
Peak to peak current	i_{opp}	$e_{in} = 400\text{mVrms}$ $f = 10.7\text{MHz}$	3.0	5.0		mA P-P
Output saturation	$V_o(\text{SAT})$				1.7	V
Forward transfer admittance		$e_{in} = 10\text{mVrms}$ $f \leq 10.7\text{MHz}$	24	33		mV
Input conductance	g_{in}	$e_{in} \leq 10\text{mVrms}$ $f \leq 10.7\text{MHz}$		0.35	1.0	mV
Input capacitance	c_{in}	$e_{in} \leq 10\text{mVrms}$ $f \leq 10.7\text{MHz}$		9.0	12.5	PF
Output capacitance	C_o	$f \leq 10.7\text{MHz}$		2.6	4.0	PF
Output conductance	g_o	$e_o \leq 10\text{mVrms}$ $f \leq 10.7\text{MHz}$		0.03	0.05	mV
Voltage gain	G_v	$f = 100\text{MHz}$		28		dB

EQUIVALENT CIRCUIT

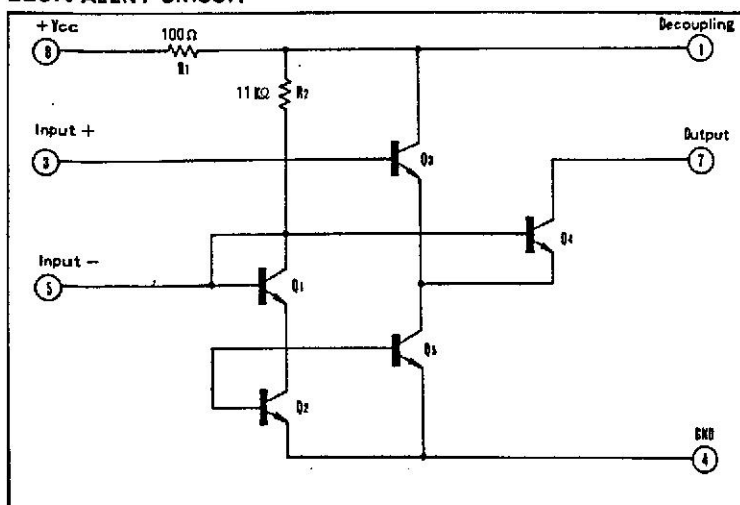

PIN CONNECTOR (TOP VIEW)



μPC554C

ABSOLUTE MAXIMUM RATING (Ta = 25°C)

	Symbol	Rating	Unit
Supply voltage	Vcc	15	V
Max. device current	Icc	18	mA
Lamp driver current, max.	IL	100	mA
Device dissipation, max.	PD	400	mW
Operating temperature	Topr	0~±75	°C
Storage temperature	Tstg	40~±125	°C


Note

1. Condition of measurement = input signal 200mVrms (Pilot 10%), frequency 1KHz.
2. R.P.F. of f = 15KHz shall be used for separation measurement.


ELECTRICAL CHARACTERISTICS (Ta = 25°C, Vcc = +9.0V)



	Symbol	Circuit for measurement	Condition of measurement	Min.	Typ.	Max.	Unit
Circuit current	Icc	1	at zero signal		10	18	mA
Input impedance	Zi	1			20		KΩ
Separation			f = 100Hz		35		dB
			f = 1KHz		45		
			f = 10KHz		30		
Gain (dB)	Av	1	38KHz B.E.F.		-1.5		dB
Channel balance	ch. B	1	(Mono)		0.2	2.0	dB
Distortion	T.H.D.		(Mono)		0.5	1.0	%
Audio / muting changeover level	Mute OFF	1			0.85	1.00	V
	Mute ON	1		1.00	1.08		
Sensitivity of Stereo indicator lamp	Lamp ON	1	(Pilot level)		12		mV
	Lamp OFF	1			8.4		
Stereo / mono Changeover level	STEREO	1		1.00	1.13		V
	MONO	1			0.82	1.00	
AM suppression	19KHz		(within 1KHz)		30		dB
	38KHz				25		
SCA rejection	SCA Rejection				55		dB
Muting		1		45	55		dB


EQUIVALENT CIRCUIT

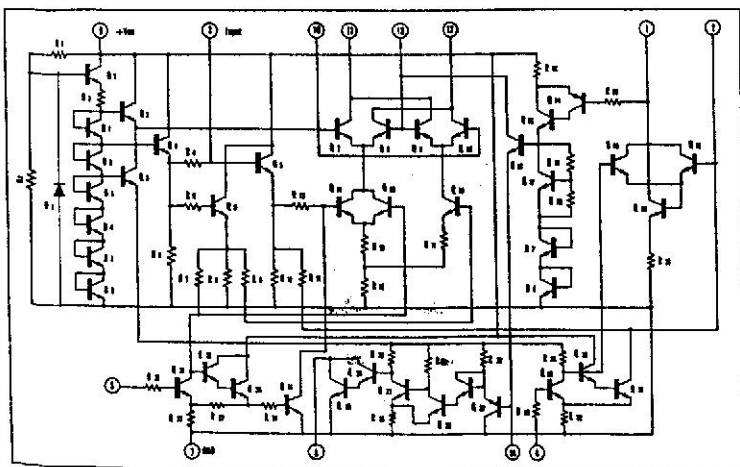

PIN CONNECTOR (Top view)

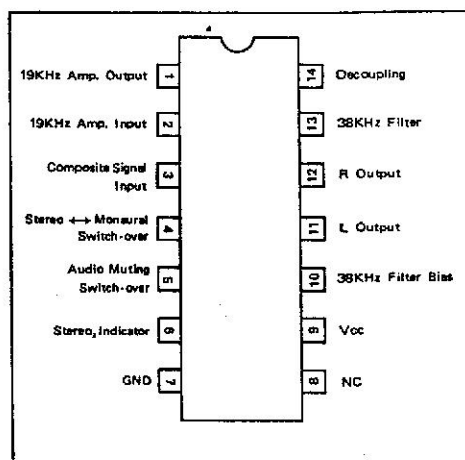

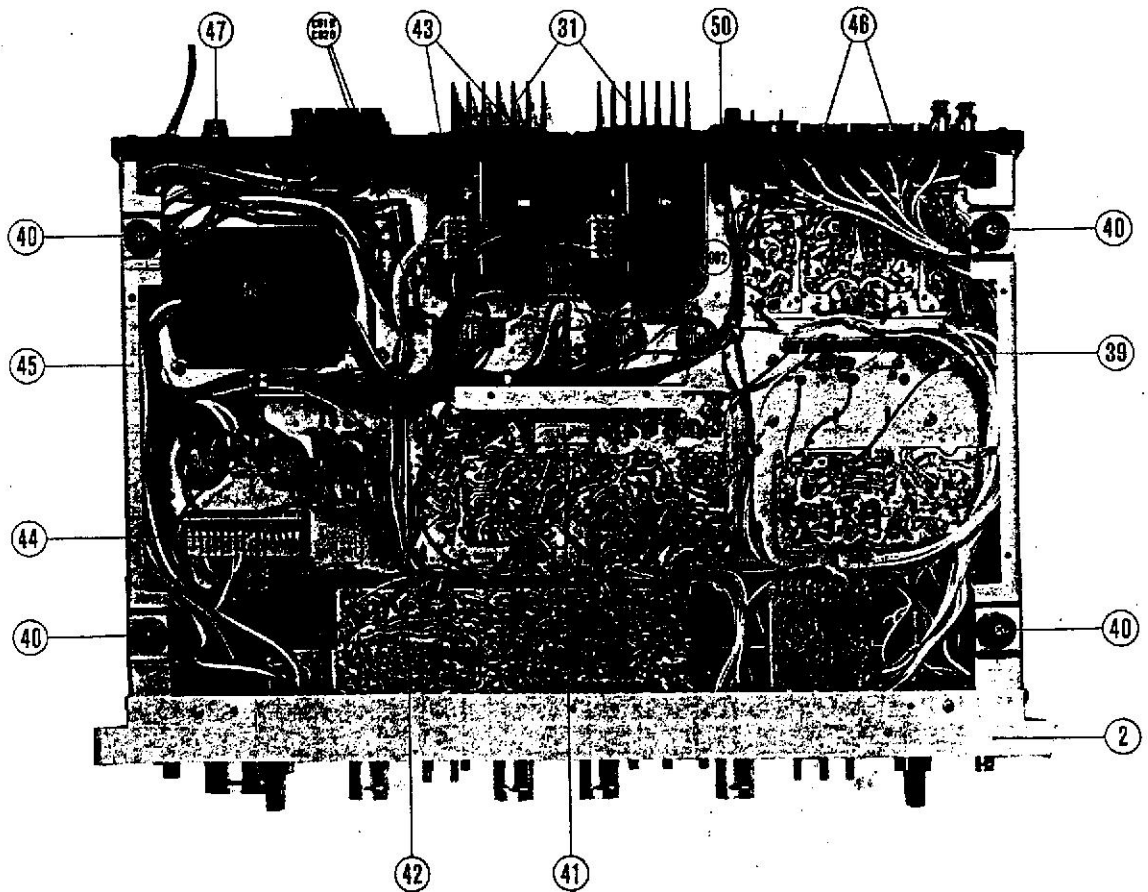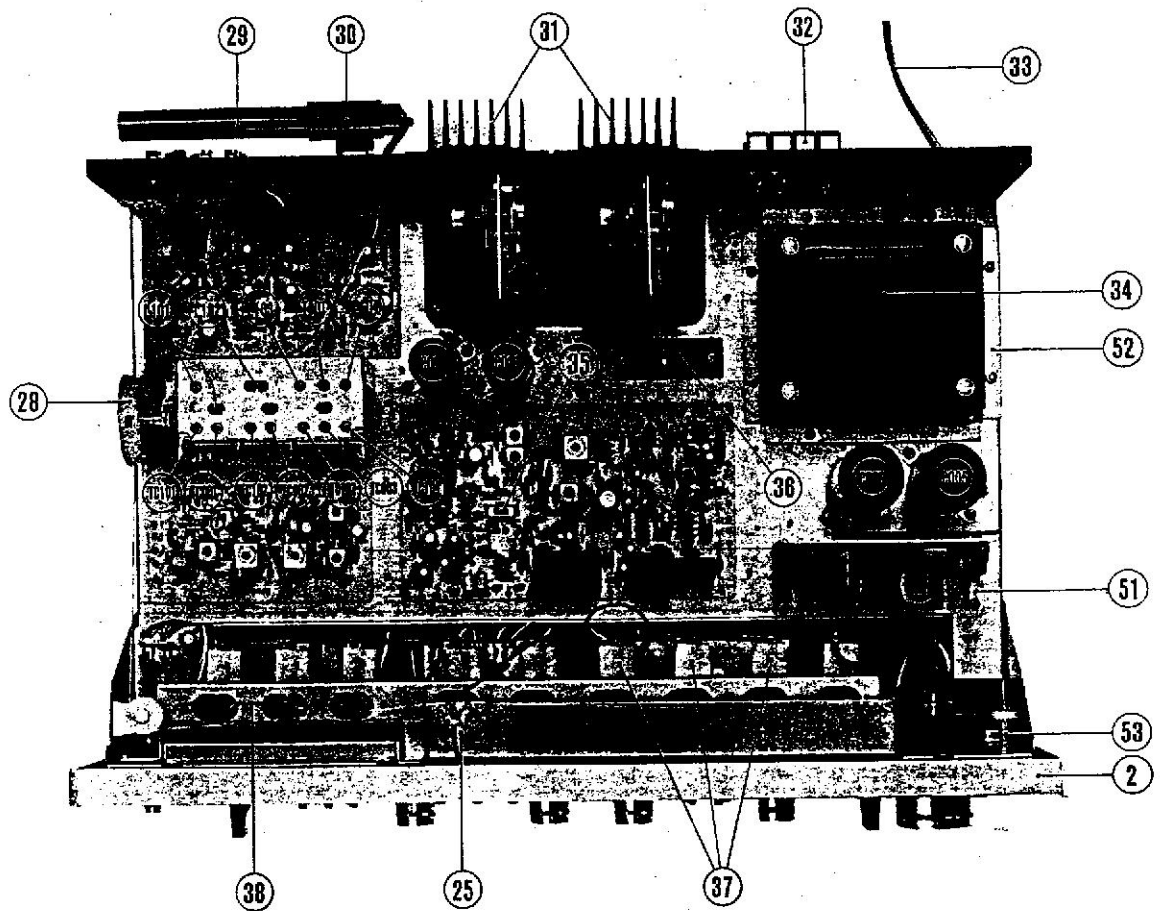


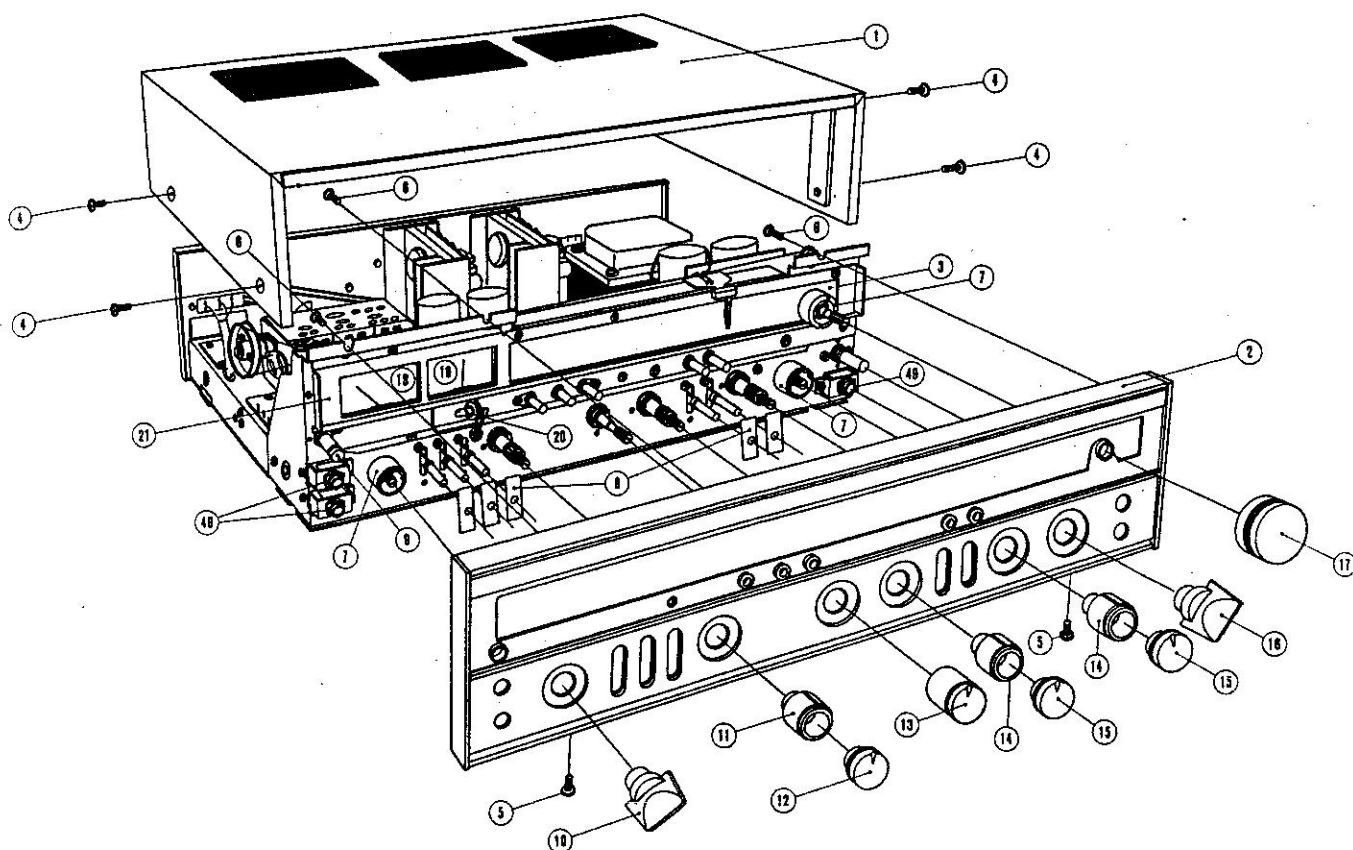


1. Cover
(Wood Finish, ex Rose wood)
2. Pannel
(Front complete Ass'y)
3. Dial Scale
4. Screw 5mm x 18mm
5. Screw 3mm x 6mm
6. Screw 4mm x 4mm
7. Bush, mounting
8. Mask, paper
9. Knob (Mic level)
10. Knob (Input selector)
11. Knob (Outer volume)
12. Knob (Inner volume)
13. Knob (Linear equalizer)
14. Knob (Outer tone control)
15. Knob (Inner tone control)
16. Knob (Speaker selector)
17. Knob (Tuning)
18. Signal strength meter
19. FM fine tuning meter
20. Stereo beacon
21. Dial scale cover
22. Tuning shaft and flywheel ass'y complete with mounting collect
23. Pulley 13mm
24. Pulley 20mm
25. Tuning pointer ass'y (Complete with lamps)
26. Cord dial
27. Spring (Tension for dial cord)
28. Drum (Tuning capacitor)
29. AM ferrite core antenna
30. Bracket, antenna
31. Power amp. complete ass'y
32. Speaker terminals
33. Mains cord
34. Power transformer

Pod's RV-0042

22. U X 1004

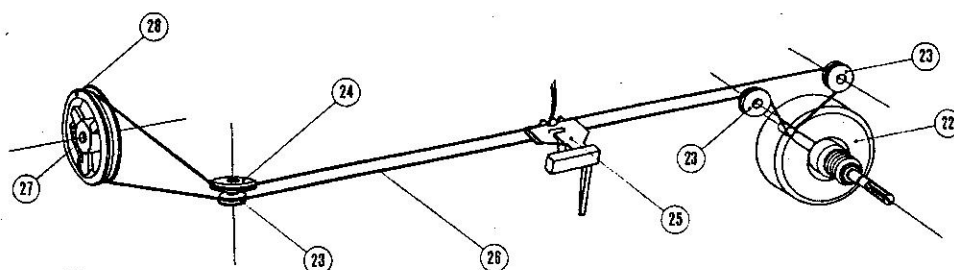


35. De-emphasis switch 50μ sec ↔ 75μ sec (E MODEL only)
36. Voltage selector 100-110-220-240V (E MODEL only)
37. Dial illumination lamps
38. Dial lamp holder
39. Antenna balun
40. Foot
41. Shield IF
42. Clamp, cable
43. Connector, power amp.
44. Connector, power supply
45. Chassis complete ass'y
46. Pin jack ass'y Female
47. Fuse holder (E & U MODEL only)
48. Microphone jack
49. Headphone jack
50. Pannel back
51. Bracket, power supply board
52. Mounting, transformer
53. Stand, pulley

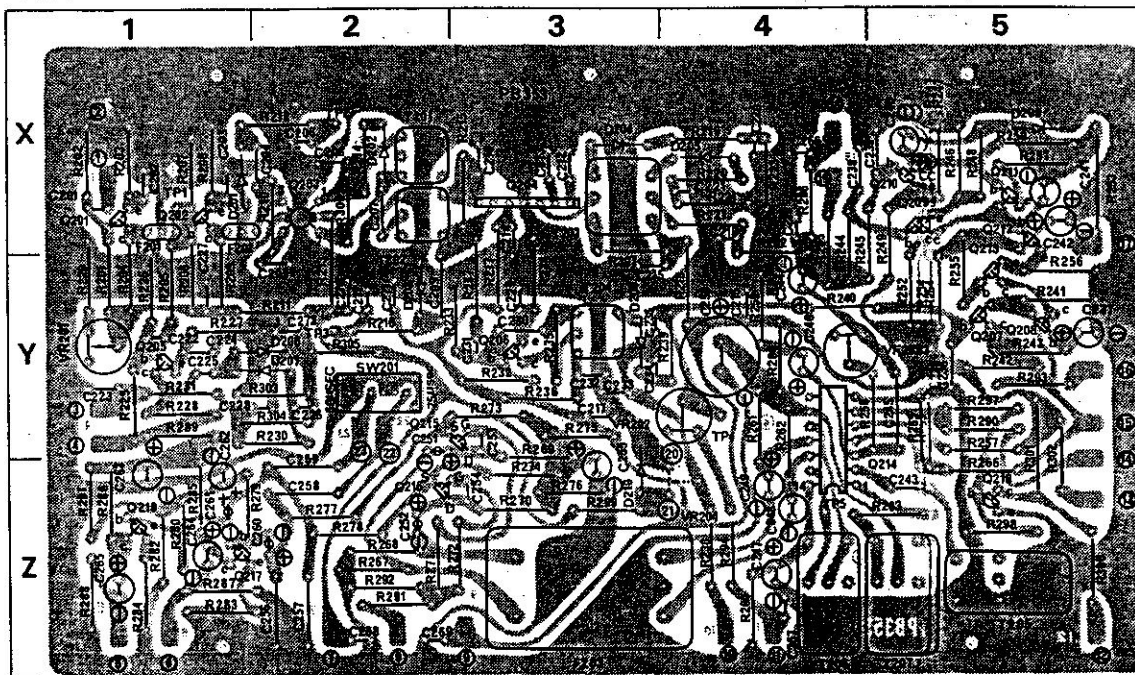

PB-353 Component Location

R201	Y1	R239	Y4	R277	Z2	C212	X3	C2250	Y4	Q210	X5
R202	X1	R240	Y4	R278	Z2	C213	X3	C2251	Z2	Q211	X5
R203	X1	R241	Y5	R279	Z1	C214	X3	C2252	Z2	Q212	X5
R204	Y1	R242	Y5	R280	Z1	C215	Y3	C2253	Y3	Q213	Y5
R205	Y1	R243	Y5	R281	Z1	C216	Y4	C2254	Z3	Q214	Y4
R206	Y1	R244	X4	R282	Z1	C217	Y3	C2255	Z3	Q215	Y2
R207	X1	R245	X4	R283	Z1	C218	X4	C2256	Z2	Q216	Z2
R208	X1	R246	X5	R284	Z1	C219	X4	C2257	Z2	Q217	Z1
R209	Y1	R247	X5	R285	Z1	C220	X4	C2258	Z2	Q218	Z1
R210	X2	R248	X5	R286	Z1	C221	X4	C2259	Z2	Q219	Z5
R211	Y2	R249	X4	R287	Z1	C222	Y2	C2260	Z2		
R212	X2	R250	X5	R288	Z1	C223	Y1	C2261	Z1	D201	X1
R213	Y2	R251	X5	R289	Y1	C224	Y1	C2262	Z1	D202	X2
R214	X2	R252	Y5	R290	Y5	C225	Y1	C2263	Z1	D203	Y2
R215	X3	R253	X5	R291	Z2	C226	Y2	C2264	Z1	D204	X3
R216	Y2	R254	Y5	R292	Z2	C227	Y1	C2265	Z1	D205	X4
R217	Y3	R255	X5	R293	Y5	C228	Y2	C2266	X4	D206	Y2
R218	Y4	R256	Y5	R294	Z4	C229	Y3	C2267	Z4	D207	Y2
R219	X4	R257	Y5	R295	X4	C230	Y3	C2268	Z2	D208	Y3
R220	X4	R258	Y4	R296	X4	C231	Y3	C2269	Z2	D209	X5
R221	X4	R259	Y4	R297	Y5	C232	Y3			D210	Z3
R222	Y4	R260	Z4	R298	Z5	C233	Y3	VFR201	Y1	D211	(X5)
R223	X4	R261	Y4	R299	Z3	C234	Y3	VFR202	Y4		
R224	X4	R262	Y4	R300	Z5	C235	Y3	VFR203	Y4	T201	X1
R225	Y1	R263	Z5	R301	Y5	C236	Y5			T202	X1
R226	Y1	R264	Y4	R302	Y5	C237	Y5	F2201	X1	T203	X3
R227	Y1	R265	Y5			C238	X4	F2202	X1	T204	Y3
R228	Y1	R266	Z5			C239	X5	F2203	Z3	T205	Z5
R229	Y1	R267	Z2	C201	X1	C240				T206	Z4
R230	Y2	R268	Z2	C202	X1	C241	X5	Q2201	X1	T207	Z5
R231	Y1	R269	Y3	C203	X1	C242	X5	Q2202	X1		
R232	Y3	R270	Z3	C204	X2	C243	Z5	Q2203	X2	(1)	X1
R233	Y2	R271	Z2	C205	Y2	C244	Y4	Q2204	X3	(2)	X1
R234	Y3	R272	Z2	C206	X2	C245	Y5	Q2205	Y1	(3)	Y1
R235	Y3	R273	Y3	C207	X2	C246	Y4	Q2206	Y3	(4)	Y1
R236	Y3	R274	Z3	C208	X2	C247	Z4	Q2207	Y5	(5)	Z1
R237	Y3	R275	Y3	C209	Y2	C248	Z4	Q2208	Y5	(6)	Z1
R238	Z4	R276	Z3	C210	X3	C249	Z4	Q2209	X5	(7)	Z2
				C211	Y2						

PB-460

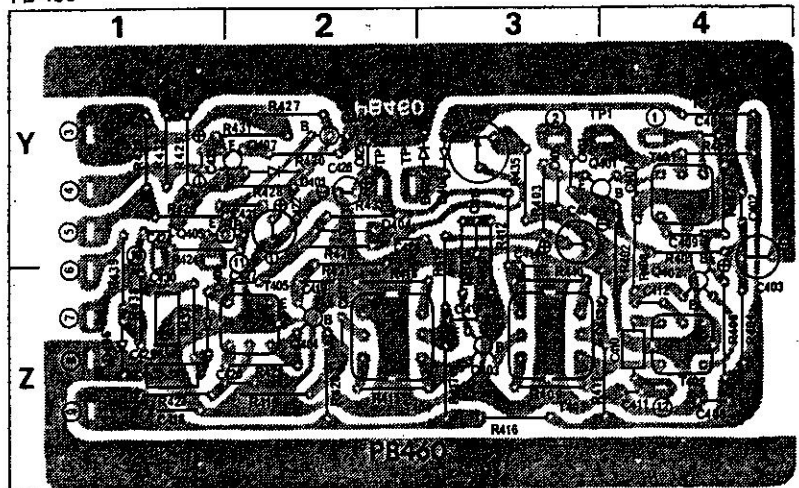

PB-460 Component Location

(8)	Z2	R401	Y4	C415	Y3
(9)	Z3	R402	Y4	C416	Y3
(10)	Z4	R403	Y3	C417	Z2
(11)	Z4	R404	Z4	C418	Z1
(12)	Z5	R405	Y4	C419	Z2
(13)	Z5	R406	Z4	C420	Z2
(14)	Z5	R407	Y4	C425	Y2
(15)	Y5	R408	Y4	C426	Y2
(16)	Y5	R409	Z3	C427	Z2
(17)	X5	R410	Z3	C428	Y2
(18)	X4	R411	Z4	C429	Z1
(19)	X4	R412	Y3	C430	Z1
(20)	Z4	R413	Y3	VR401	Y3
(21)	Z4	R414	Y3	T401	Y4
TP1	X1	R415	Z2	T402	Z4
TP2	X2	R416	Z3	T403	Z3
TP3	Y2	R417	Z3	T404	Z2
TP4	Y4	R418	Z2	T405	Z2
TP5	Z4	R419	Z2	Q401	Y4
		R420	Z2	Q402	Z4
		R421	Y2	Q403	Z3
		R422	Z2	Q404	Z2
		R423	Z1	D402	Y3
		R433	Y2	D403	Y3
		R434	Y4	D404	Y2
		R435	Y3	D405	Z1
		R436	Y2	D406	Z1
		R437	Z1		
		R438	Z1		
		R439	Z1		
		R440	Z3		
		C401	Y3	(1)	Y4
		C402	Y4	(2)	Y3
		C403	Y3	(6)	Z1
		C404	Y3	(7)	Z1
		C405	Y3	(8)	Z1
		C406	Y4	(9)	Z1
		C407	Y4	(12)	Z4
		C408	Z4	TP1	Y4
		C409	Y4	TP2	Y2
		C410	Z4	TP3	Y2
		C411	Z4		
		C412	Z4		
		C413	Z3		
		C414	Y3		


PB-755 Components Location

R501		Z2	R516		Z3	R531		Y2
R502		Z3	R517		Z2	R532		Y3
R503		Z2	R518		Z3	R533		Y2
R504		Z3	R519		Y2	R534		Y3
R505		Z2	R520		Y3	R535		Z1
R506		Z3	R521		Y2	R536		Z4
R507		Z2	R522		Y3	R537		Z1
R508		Z3	R523		Z2	R538		Z4
R509		Z2	R524		Z3	R539		Z1
R510		Z3	R525		Z2	R540		Z4
R511		Z2	R526		Z3	R541		Z1
R512		Z3	R527		Z2	R542		Z4
R513		Y2	R528		Z3	R543		Z1
R514		Y3	R529		Y2	R544		Z4
R515		Z2	R530		Y3	R545		Z1

R546		Z4	R561		Y1
R547		Z1	R562		Y4
R548		Z4	R563		Y3
R549		Z1	C5001		Z2
R550		Z4	C5002		Z3
R551		Y1	C5003		Z2
R552		Y4	C5004		Z3
R553		Z1	C5005		Z2
R554		Z4	C5006		Z3
R555		Z1	C5007		Z2
R556		Z4	C5008		Z3
R557		Y1	C5009		Y2
R558		Y4	C5100		Y3
R559		Y1	C5101		Y2
R560		Y4	C5102		Y3


C530		Y4	Q501		Z2
C531		Y1	Q502		Z3
C532		Y4	Q503		Y2
C533		Z2	Q504		Y3
C534		Z3	Q505		Y2
C535		Y3	Q506		Y3
			Q507		Z1
			Q508		Z4
			Q509		Y1
			Q510		Y4
			Q511		Y1
			Q512		Y4

PB-755

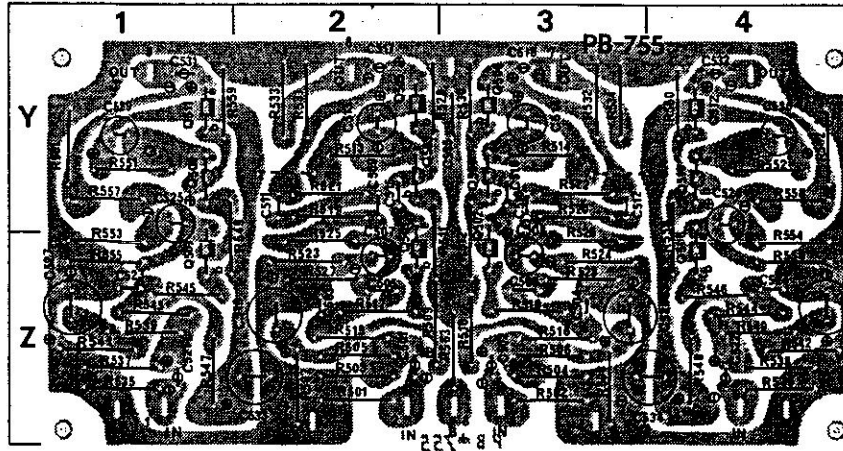

C5121		Y2	(1)		Z1
C5122		Y3	(2)		Z2
C5123		Y2	(3)		Z3
C5124		Y3	(4)		Z3
C5125		Y2	(5)		Z4
C5126		Y3	(6)		Y4
C5127		Y2	(7)		Y3
C5128		Y3	(8)		Y2
C5129		Y1			

PB-756

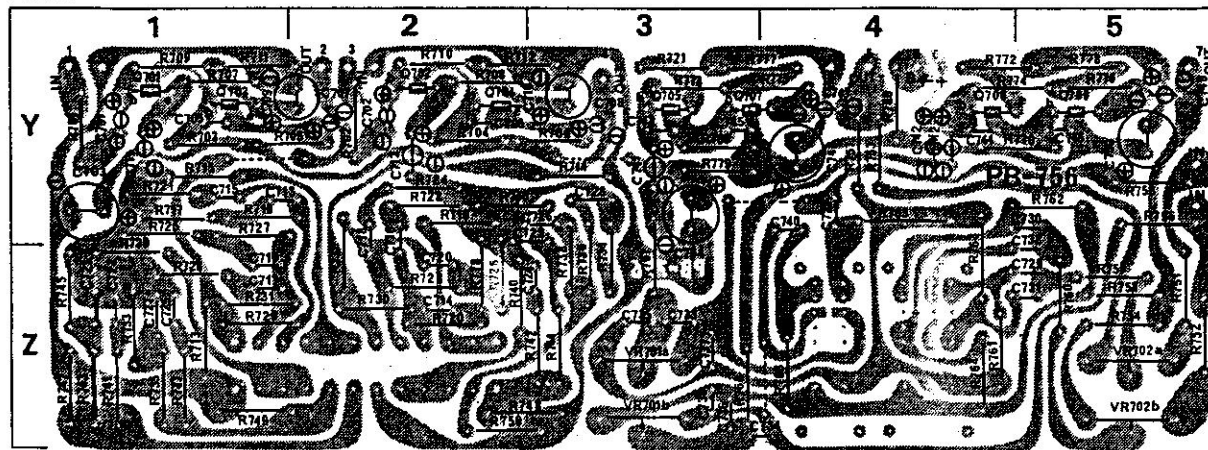

PB-756 Components Location

R701		Y1	R714		Y3	R727		Y1
R702		Y2	R715		Y1	R728		Z2
R703		Y1	R716		Y2	R729		Z1
R704		Y2	R717		Y1	R730		Z2
R705		Y2	R718		Z2	R731		Z1
R706		Y3	R719		Y1	R732		Z2
R707		Y1	R720		Z2	R733		Z1
R708		Y2	R721		Y1	R734		Z3
R709		Y1	R722		Y2	R735		Z1
R710		Y2	R723		Z1	R736		Z3
R711		Y1	R724		Y2	R737		Z1
R712		Y2	R725		Y1	R738		Z3
R713		Z1	R726		Z2	R739		Z1

R740		Z2	R753		Y4
R741		Z1	R754		Z5
R742		Z3	R755		Y5
R743		Z1	R756		Y5
R744		Z3	R757		Y4
R745		Z1	R758		Z5
R746		Z2	R759		Z5
R747		Z1	R760		Z5
R748		Z2	R761		Z4
R749		Z1	R762		Y5
R750		Z2	R763		Z4
R751		Z5	R764		Z4
R752		Z5	R765		Y4


R766		Z4	R776		Y5
R767		Z3	R777		Y3
R768		Z3	R778		Y5
R769		Y3			
R770		Y5			
R771		Y3			
R772		Y4			
R773		Y3			
R774		Y4			
R775		Y4			
R776		Y5			
R777		Y3			
R778		Y5			

PB-758 Components Location


R901		X3	C907		Y2
R902		Y3	C908		X1
R903		X4	C909		X2
R904		Y4	C910		X2
R905		Y3	C911		X1
R906		Y3	C912		X1
R907		X2			
R908		X3	Q901		Y1
R909		X3	Q902		X3
R910		Y2	Q903		X2
R911		Y2	Q904		Y2
R912		Y2	Q905		Y2
R913		Y2	Q906		Y3
R914		Y2			
R915		Y1	D901		Y1
R916		Z1	D902		Z3
R917		Y1	D903		Y2
R918		Y1	D904		Z3
R919		Z1			

C901		X4	ZD901		Y1	(6)		Z3
C902		X4	(1)		Z2	(7)		Z3
C903		X2	(2)		Z2	(8)		Z3
C904		X2	(3)		Z2	(9)		Z3
C905		Y2	(4)		Z2	(10)		Z3
C906		Y2	(5)		Z2	(11)		Z3
						(12)		Z3

PB-758

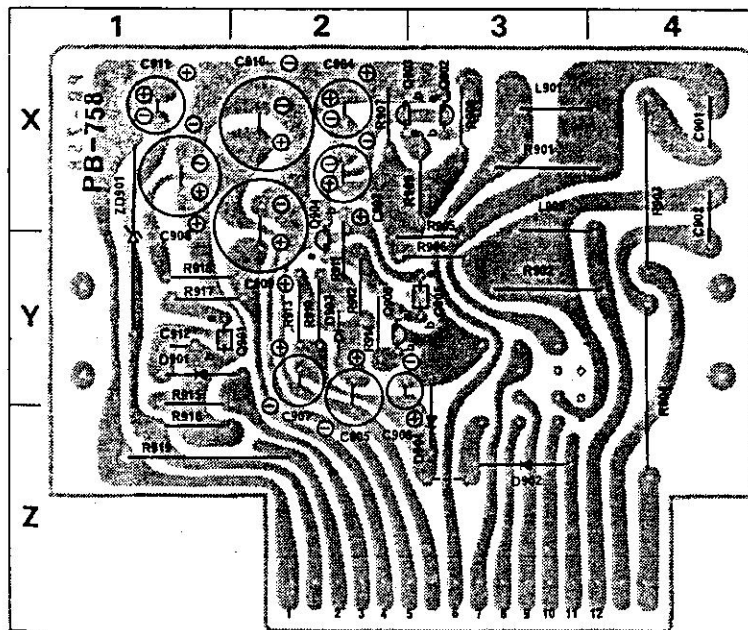

PB-760

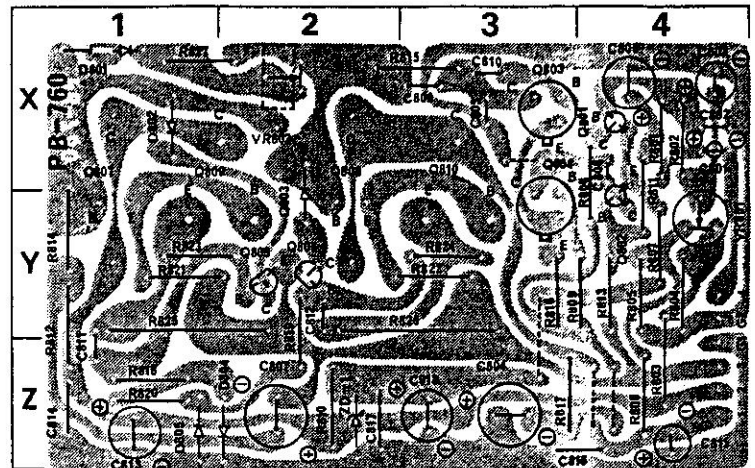

PB-760 Component Location

R801		X4	R808		X4	C814		Z1
R802		X4	R809		Y4	C815		Z4
R803		Z4	R810		Z2	C816		Z3
R804		Y4	R811		Y4	C817		Z2
R805		Y4	R812		Y1	C818		Z3
R806		Z4	R813		Y4	VR801		Y4
R807		Y4	R814		Y1	VR802		X2
			R815		X3			
			R816		Y3	Q801		X4
			R817		Z3	Q802		Y4
			R818		Z1	Q803		X3
			R819		Y2	Q804		Y4
			R820		Z1	Q805		Y2
			R821		Y1	Q806		Y2
			R822		Y3	Q807		Y1
			R823		Y1	Q808		Y2
			R824		Y3	Q809		X1
			R825		Y1	Q810		X3
			R826		Y3			
			R827		X1	D801		X1
						D802		X1
						D803		Y2
						D804		Z2
						D805		Z1
						ZD-1		Z2
						(1)		Z4
						(2)		Z4
						(3)		Z4
						(4)		Y4
						C801		X4
						C802		X4
						C803		X4
						C804		Z3
						C805		X3
						C806		X4
						C807		Z2
						C808		X4
						C809		X3
						C810		X3
						C811		Z1
						C812		Y2
						C813		Z1
						G1		Z4
						G2		Y4

R779		Y3	C711		Y1	C724		Z3	C737		Z3	C750		Y5	VR701b		Z3
R780		Y4	C712		Y2	C725		Z1	C738		Z3				VR702a		Z5
			C713		Y1	C726		Y3	C739		Y4	Q701		Y1	VR702b		Z5
C701		Y1	C714		Z2	C727		Z1	C740		Y3	Q702		Y2			
C702		Y2	C715		Y1	C728		Y3	C741		Y3	Q703		Y1	(1)		Y1
C703		Y1	C716		Y2	C729		Z5	C742		Y4	Q704		Y2	(2)		Y2
C704		Y3	C717		Z1	C730		Y5	C743		Y3	Q705		Y3	(3)		Y2
C705		Y1	C718		Y2	C731		Z5	C744		Y4				(4)		Y3
C706		Y2	C719		Z1	C732		Z5	C745		Y3	Q707		Y3	(5)		Y4
C707		Y2	C720		Z2	C733		Z3	C746		Y5	Q708		Y4	(6)		Y4
C708		Y3	C721		Z1	C734		Z4	C747		Y4	Q709		Y5	(7)		Y5
C709		Y2	C722		Y2	C735		Z3	C748		Y5				(8)		Y5
C710		Y3	C723		Z1	C736		Z3	C749		Y4	VR701a		Z3	(9)		Y5

REPLACEMENT PARTS

RESISTORS: $\pm 10\%$ $\frac{1}{4}$ Watt deposit carbon, unless noted otherwise

SYMBOL NO.	DESCRIPTION	SYMBOL NO.	DESCRIPTION	SYMBOL NO.	DESCRIPTION	SYMBOL NO.	DESCRIPTION
R001	100 Ω	R215	2.2K Ω	R260	4.7K Ω	R351	3.3K Ω
R002	150 Ω 7W	R216	47K Ω	R261	3.9K Ω	R352	6.8K Ω
R003	METAL OXIDE FIXED	R217	390 Ω	R262	3.9K Ω	R353	1M Ω
R004	180K Ω	R218	1K Ω	R263	47 Ω	R354	1M Ω
R005	180K Ω	R219	1K Ω	R264	100 Ω	R355	330K Ω
R006	180K Ω	R220	1K Ω	R265	39K Ω	R356	820K Ω
R007	680 Ω 2W	R221	47 Ω	R266	100K Ω	R357	1K Ω
R008	METAL OXIDE FIXED	R222	100 Ω	R267	3.3K Ω	R358	5.6K Ω
R009	10 Ω	R223	6.8K Ω	R268	3.3K Ω	R359	12K Ω
R010	150 Ω	R224	6.8K Ω	R269	220K Ω	R360	1M Ω
R011	2.2M Ω $\frac{1}{4}$ W	R225	22K Ω	R270	220K Ω	R361	10K Ω
R012	① MODEL ONLY	R226	3.3K Ω	R271	1M Ω	R362	220K Ω
		R227	1K Ω	R272	1M Ω		
		R228	4.7K Ω	R273	220K Ω	R401	4.7K Ω
		R229	560 Ω	R274	220K Ω	R402	18K Ω
		R230	10K Ω	R275	100K Ω	R403	1.5K Ω
		R231	100K Ω	R276	33K Ω	R404	22K Ω
		R232	15K Ω	R277	33K Ω	R405	10K Ω
R101	100K Ω	R233	2.2K Ω	R278	33K Ω	R406	15K Ω
R102	22 Ω	R234	1K Ω	R279	150K Ω	R407	2.2K Ω
R103	22K Ω	R235	15K Ω	R280	150K Ω	R408	2.2K Ω
R104	4.7K Ω	R236	1K Ω	R281	100K Ω	R409	150K Ω
R105	1K Ω	R237	1K Ω	R282	18K Ω	R410	1.5K Ω
R106	220 Ω	R238	10 Ω	R283	1.2K Ω	R411	2.7K Ω
R107	1M Ω	R239	1K Ω	R284	1.2K Ω	R412	470 Ω
R108	100 Ω	R240	47K Ω	R285	10K Ω	R413	470 Ω
R109	10K Ω	R241	22 Ω	R286	10K Ω	R414	120 Ω
R110	10K Ω	R242	33K Ω	R287	470K Ω	R415	150K Ω
R111	100 Ω	R243	33K Ω	R288	470K Ω	R416	100 Ω
R112	3.3K Ω	R244	100K Ω	R289	470 Ω	R417	10K Ω
		R245	100K Ω	R290	10 Ω	R418	150K Ω
R201	1.8K Ω	R246	39 Ω	R291	100K Ω	R419	10K Ω
R202	560 Ω	R247	39 Ω	R292	47K Ω	R420	82K Ω
R203	1K Ω	R248	2.7K Ω	R293	6.8K Ω	R421	100 Ω
R204	470 Ω	R249	2.7K Ω	R294	2.2K Ω	R422	22K Ω
R205	1.5K Ω	R250	47K Ω	R295	10K Ω	R423	100 Ω
R206	2.2K Ω	R251	4.7K Ω	R296	39K Ω	R433	10K Ω
R207	680 Ω	R252	47K Ω	R297	15K Ω	R434	3.9K Ω
R208	1K Ω	R253	2.2K Ω 1W	R298	15K Ω	R435	3.3K Ω
R209	470 Ω	R254	12K Ω	R299	2.2K Ω	R436	10K Ω
R210	560 Ω	R255	47K Ω	R300	6.8K Ω	R437	470 Ω
R211	470 Ω	R256	220 Ω	R301	390 Ω $\frac{1}{4}$ W	R438	3.9K Ω
R212	22K Ω	R257	100K Ω	R302	6.8K Ω	R439	1.5K Ω
R213	470 Ω	R258	8.2K Ω			R440	150K Ω
R214	470 Ω	R259	47K Ω				

RESISTORS: $\pm 5\%$ TOLERANCE $\frac{1}{4}$ Watt deposited carbon, unless specified

SYMBOL NO.	DESCRIPTION	SYMBOL NO.	DESCRIPTION	SYMBOL NO.	DESCRIPTION	SYMBOL NO.	DESCRIPTION
R451	4.7K	R464	8.2K	R508	18K	R517	180
R452	4.7K			R509	82K	R518	180
R453	470K	R501	100K	R510	82K	R519	LO-NOISE
R454	470K	R502	100K				39K
R455	680K			R511	LO-NOISE		
R456	680K	R503	LO-NOISE		47K	R520	LO-NOISE
R457	33K		330K	R512	LO-NOISE		39K
R458	33K	R504	LO-NOISE		47K	R521	LO-NOISE
R459	10K		330K	R513	1K		470K
R460	10K	R505	LO-NOISE	R514	1K	R522	LO-NOISE
R461	470K		560K				470K
R462	470K	R506	LO-NOISE	R515	LO-NOISE	R523	1K
R463	8.2K		560K		3.9K	R524	1K
		R507	18K	R516	LO-NOISE	R525	1K
					3.9K		

SYMBOL NO.	DESCRIPTION	SYMBOL NO.	DESCRIPTION	SYMBOL NO.	DESCRIPTION	SYMBOL NO.	DESCRIPTION
R526	1K	R606	1/2W 390	R733	1.8K	R807	8.2K X 2
R527	LO-NOISE 33K	R607	100	R734	1.8K	R808	3.9K X 2
R528	LO-NOISE 33K	R651	56K	R735	6.8K	R809	3.9K X 2
R529	68K	R652	56K	R736	6.8K	R810	METAL OXIDE
R530	68K	R653	220K	R737	22K	R811	5.6K-1/2W X 2
R531	10K	R654	220K	R738	22K	R812	1.2K X 2
R532	10K	R655	12K	R739	6.8K	R813	METAL OXIDE
R533	150K	R656	12K	R740	6.8K	R814	5.6K-1/2W X 2
R534	150K	R657	27K	R741	27K	R815	47K X 2
R535	100K	R658	27K	R742	27K	R816	METAL OXIDE
R536	100K	R659	1M	R743	4.7K	R817	3.9K-1/2W X 2
R537	LO-NOISE 560K	R660	1M	R744	4.7K	R818	METAL OXIDE
R538	LO-NOISE 560K	R661	1M	R745	6.8K	R819	22-1/2W X 2
R539	LO-NOISE 560K	R662	1M	R746	6.8K	R820	METAL OXIDE
R540	LO-NOISE 560K	R663	330K	R747	470K	R821	180-1/2W X 2
R541	12K	R664	330K	R748	470K	R822	METAL OXIDE
R542	12K	R665	560K	R749	470K	R823	47-1/2W X 2
R543	LO-NOISE 3.9K	R666	560K	R750	470K	R824	1K X 2
R544	LO-NOISE 3.9K	R667	5.6K	R751	1.5K	R825	1K X 2
R545	180	R668	5.6K	R752	1.5K	R826	100K X 2
R546	180	R669	330K	R753	1.5K	R827	METAL OXIDE
R547	68K	R670	330K	R754	1.5K	R828	100-1/2W X 2
R548	68K	R671	1K	R755	18K	R829	METAL OXIDE
R549	LO-NOISE 47K	R701	4.7K	R756	18K	R830	100-1/2W X 2
R550	LO-NOISE 47K	R702	4.7K	R757	18K	R831	180 X 2
R551	1K	R703	82K	R758	18K	R832	180 X 2
R552	1K	R704	82K	R759	3.3K	R833	CEMENT SEALED
R553	470	R705	4.7K	R760	3.3K	R834	0.47-5W X 2
R554	470	R706	4.7K	R761	1M	R835	CEMENT SEALED
R555	LO-NOISE 22K	R707	22K	R762	1M	R836	0.47-5W X 2
R556	LO-NOISE 22K	R708	22K	R763	1M	R837	120 X 2
R557	LO-NOISE 220K	R709	1.2M	R764	1M	R901	METAL OXIDE
R558	LO-NOISE 220K	R710	1.2M	R765	1M	R902	22-1W
R559	68K	R711	2.7K	R766	1M	R903	METAL OXIDE
R560	68K	R712	2.7K	R767	4.7K	R904	22-1W
R561	10K	R713	2.7K	R768	4.7K	R905	METAL OXIDE
R562	10K	R714	220K	R769	47K	R906	4.7-3W
R601	12K	R715	220K	R770	47K	R907	METAL OXIDE
R602	12K	R716	33K	R771	820	R908	4.7-3W
R603	27K	R717	33K	R772	820	R909	39K
R604	27K	R718	27K	R773	150K	R910	39K
R605	1W 300	R719	27K	R774	150K	R911	3.9K
		R720	12K	R775	5.6K	R912	6.8K
		R721	12K	R776	5.6K	R913	22K
		R722	390K	R777	470	R914	10K
		R723	390K	R778	470	R915	100K
		R724	56K	R779	1K	R916	82
		R725	56K	R780	100	R917	820
		R726	33K			R918	METAL OXIDE
		R727	18K	R801	3.9K X 2	R919	56-2W
		R728	18K	R802	47K X 2		
		R729	1M	R803	METAL OXIDE		
		R730	1M		10K-1/2W X 2		
		R731	1M	R804	47 X 2		
		R732	1M	R805	47 X 2		
				R806	METAL OXIDE		
					10K-1/2W X 2		

CAPACITORS

SYMBOL NO.	DESCRIPTION	SYMBOL NO.	DESCRIPTION
C001	0.04 μ F +80% -20% 25V ceramic	C013	0.01 μ F
C002	10 μ F +50% -10% 16V electrolytic	C014	0.01 μ F
C003	5PF $\pm$ 0.5PF 50V ceramic	C015	0.01 μ F
C004	47 μ F +50% -10% 16V electrolytic	C016	0.01 μ F
C005	4700 μ F +50% -10% 63V electrolytic	C017	0.01 μ F
C006	4700 μ F +50% -10% 63V electrolytic	C018	0.01 μ F
C007	0.1 μ F +80% -20% 25V ceramic	C019	2200PF
C008	0.1 μ F +80% -20% 25V ceramic	C020	2200PF
C009	0.1 μ F +80% -20% 25V ceramic	C021	0.047 μ F
C010	0.1 μ F +80% -20% 25V ceramic	C022	0.047 μ F
C011	1500 μ F +50% -10% 50V electrolytic	C023	0.1 μ F +80% -20% 25V ceramic
C012	3300 μ F +50% -10% 25V electrolytic		

SYMBOL NO.	DESCRIPTION	SYMBOL NO.	DESCRIPTION	SYMBOL NO.	DESCRIPTION	SYMBOL NO.	DESCRIPTION
C101	22PF	C106	100PF	C111	0.01 μ F	C116	33PF
C102	47PF	C107	5000PF	C112	5000PF	C117	5000PF
C103	22PF	C108	100PF	C113	1PF	C118	5000PF
C104	22PF	C109	100PF	C114	20PF	C119	5000PF
C105	7PF	C110	5000PF	C115	10PF		

SYMBOL NO.	DESCRIPTION	SYMBOL NO.	DESCRIPTION
C201	0.01 μ F +80% -20% 25V ceramic	C243	0.04 μ F +80% -20% 25V ceramic
C202	0.04 μ F +80% -20% 25V ceramic	C244	1 μ F +75% -10% 50V electrolytic
C203	0.04 μ F +80% -20% 25V ceramic	C245	560PF $\pm$ 5% 50V polystyrol
C204	47PF $\pm$ 10% 50V ceramic	C246	10 μ F +50% -10% 16V electrolytic
C205	0.04 μ F +80% -20% 25V ceramic	C247	4.7 μ F +75% -10% 25V electrolytic
C206	0.01 μ F +80% -20% 25V ceramic	C248	4.7 μ F +75% -10% 25V electrolytic
C207	2.7PF $\pm$ 5% 500V ceramic	C249	4.7 μ F +75% -10% 25V electrolytic
C208	0.04 μ F +80% -20% 25V ceramic	C250	470 μ F +50% -10% 16V electrolytic
C209	470PF $\pm$ 20% 50V ceramic	C251	0.22 μ F +50% -20% 35V solid tantalum
C210	0.04 μ F +80% -20% 25V ceramic	C252	0.22 μ F +50% -20% 35V solid tantalum
C211	0.01 μ F +80% -20% 25V ceramic	C253	470PF $\pm$ 20% 50V ceramic
C212	0.04 μ F +80% -20% 25V ceramic	C254	470PF $\pm$ 20% 50V ceramic
C213	0.04 μ F +80% -20% 25V ceramic	C255	10 μ F +50% -10% 16V electrolytic
C214	0.04 μ F +80% -20% 25V ceramic	C256	1800PF $\pm$ 5% 50V polystyrol
C215	0.04 μ F +80% -20% 25V ceramic	C257	1800PF $\pm$ 5% 50V polystyrol
C216	0.04 μ F +80% -20% 25V ceramic	C258	820PF $\pm$ 5% 50V polystyrol
C217	0.04 μ F +80% -20% 25V ceramic	C259	820PF $\pm$ 5% 50V polystyrol
C218	470PF $\pm$ 20% 50V ceramic	C260	0.22 μ F +50% -20% 35V solid tantalum
C219	100PF $\pm$ 10% 50V ceramic	C261	0.22 μ F +50% -20% 35V solid tantalum
C220	470PF $\pm$ 20% 50V ceramic	C262	10 μ F +50% -10% 16V electrolytic
C221	470PF $\pm$ 20% 50V ceramic	C263	47 μ F +50% -10% 16V electrolytic
C222	470PF $\pm$ 20% 50V ceramic	C264	1 μ F +75% -10% 50V electrolytic
C223	0.04 μ F +80% -20% 25V ceramic	C265	1 μ F +75% -10% 50V electrolytic
C224	0.04 μ F +80% -20% 25V ceramic	C266	0.01 μ F +80% -20% 25V ceramic
C225	470PF $\pm$ 20% 50V ceramic	C267	0.01 μ F +80% -20% 25V ceramic
C226	0.01 μ F +80% -20% 25V ceramic	C268	0.01 μ F +80% -20% 25V ceramic
C227	0.04 μ F +80% -20% 25V ceramic	C269	0.01 μ F +80% -20% 25V ceramic
C228	0.01 μ F +80% -20% 25V ceramic		
C229	0.01 μ F +80% -20% 25V ceramic		
C230	0.47PF $\pm$ 5% 500V ceramic	C351	0.04 μ F +80% -20% 25V ceramic
C231	470PF $\pm$ 20% 50V ceramic	C352	0.015 μ F $\pm$ 10% 50V mylar
C232	0.04 μ F +80% -20% 25V ceramic	C353	0.01 μ F $\pm$ 10% 50V mylar
C233	0.04 μ F +80% -20% 25V ceramic	C354	3300PF $\pm$ 10% 50V mylar
C234	0.01 μ F +80% -20% 25V ceramic	C355	2200PF $\pm$ 10% 50V mylar
C235	0.01 μ F +80% -20% 25V ceramic	C356	2200PF $\pm$ 10% 50V mylar
C236	0.1 μ F +80% -20% 25V ceramic	C357	3900PF $\pm$ 10% 50V mylar
C237	2.2 μ F +75% -10% 25V electrolytic	C358	0.033 μ F $\pm$ 10% 50V mylar
C238	0.1 μ F +80% -20% 25V ceramic		
C239	0.1 μ F +80% -20% 25V ceramic		
C241	10 μ F +50% -10% 16V electrolytic	C401	0.04 μ F +80% -20% 25V ceramic
C242	4.7 μ F +75% -10% 25V electrolytic	C402	0.04 μ F +80% -20% 25V ceramic
		C403	47 μ F +50% -10% 16V electrolytic

SYMBOL NO.	DESCRIPTION	SYMBOL NO.	DESCRIPTION
C404	47 μ F +50% -10% 16V electrolytic	C602	0.033 μ F $\pm$ 10% 50V mylar
C405	0.04 μ F +80% -20% 25V ceramic	C603	470PF $\pm$ 5% 50V polystyrol
C406	10PF $\pm$ 1PF 50V ceramic	C604	470PF $\pm$ 5% 50V polystyrol
C407	0.04 μ F +80% -20% 25V ceramic	C605	10 μ F +50% -10% 16V electrolytic
C408	0.04 μ F +80% -20% 25V ceramic		
C409	0.04 μ F +80% -20% 25V ceramic	C651	0.1 μ F $\pm$ 10% 50V mylar
C410	450PF $\pm$ 5% 50V polystyrol	C652	0.1 μ F $\pm$ 10% 50V mylar
C411	15PF $\pm$ 10% 50V ceramic	C653	0.039 μ F $\pm$ 10% 50V mylar
C412	0.04 μ F +80% -20% 25V ceramic	C654	0.039 μ F $\pm$ 10% 50V mylar
C413	0.04 μ F +80% -20% 25V ceramic	C655	2.2 μ F $\pm$ 10% 35V tantalum
C414	0.04 μ F +80% -20% 25V ceramic	C656	2.2 μ F $\pm$ 10% 35V tantalum
C415	0.04 μ F +80% -20% 25V ceramic	C657	820PF $\pm$ 10% 50V mylar
C416	0.04 μ F +80% -20% 25V ceramic	C658	820PF $\pm$ 10% 50V mylar
C417	0.04 μ F +80% -20% 25V ceramic	C659	2200PF $\pm$ 5% 50V polystyrol
C418	0.1 μ F +80% -20% 25V ceramic	C660	2200PF $\pm$ 5% 50V polystyrol
C419	0.04 μ F +80% -20% 25V ceramic	C661	2.2 μ F $\pm$ 10% 35V tantalum
C420	0.04 μ F +80% -20% 25V ceramic	C662	2.2 μ F $\pm$ 10% 35V tantalum
C425	0.04 μ F +80% -20% 25V ceramic	C663	100 μ F +50% -10% 25V electrolytic
C426	2.2 μ F +75% -10% 25V electrolytic	C664	100 μ F +50% -10% 25V electrolytic
C427	100PF $\pm$ 10% 50V ceramic		
C428	0.04 μ F +80% -20% 25V ceramic	C701	1 μ F $\pm$ 10% 10V tantalum
C429	3300PF $\pm$ 5% 50V polystyrol	C702	1 μ F $\pm$ 10% 10V tantalum
C430	3300PF $\pm$ 5% 50V polystyrol	C703	100 μ F +50% -10% 25V electrolytic
		C704	100 μ F +50% -10% 25V electrolytic
C451	1 μ F $\pm$ 20% 35V solid tantalum	C705	10P $\pm$ 10% 50V ceramic
C452	1 μ F $\pm$ 20% 35V solid tantalum	C706	10P $\pm$ 10% 50V ceramic
C453	0.33 μ F $\pm$ 20% 35V solid tantalum	C707	2.2 μ F $\pm$ 10% 25V tantalum
C454	0.33 μ F $\pm$ 20% 35V solid tantalum	C708	2.2 μ F $\pm$ 10% 25V tantalum
C455	10 μ F +50% -10% 50V electrolytic	C709	22 μ F +50% -10% 16V electrolytic
		C710	22 μ F +50% -10% 16V electrolytic
C501	2.2 μ F $\pm$ 20% 10V solid tantalum	C711	10 μ F $\pm$ 10% 10V tantalum
C502	2.2 μ F $\pm$ 20% 10V solid tantalum	C712	10 μ F $\pm$ 10% 10V tantalum
C503	47PF $\pm$ 10% 50V ceramic	C713	0.015 μ F $\pm$ 10% 50V mylar
C504	47PF $\pm$ 10% 50V ceramic	C714	0.015 μ F $\pm$ 10% 50V mylar
C505	150PF $\pm$ 10% 50V ceramic	C715	100PF $\pm$ 10% 50V ceramic
C506	150PF $\pm$ 10% 50V ceramic	C716	100PF $\pm$ 10% 50V ceramic
C507	33 μ F +50% -10% 16V electrolytic	C717	1000PF $\pm$ 10% 50V mylar
C508	33 μ F +50% -10% 16V electrolytic	C718	1000PF $\pm$ 10% 50V mylar
C509	1800PF $\pm$ 10% 50V mylar	C719	0.022 μ F $\pm$ 10% 50V mylar
C510	1800PF $\pm$ 10% 50V mylar	C720	0.022 μ F $\pm$ 10% 50V mylar
C511	6800PF $\pm$ 10% 50V mylar	C721	0.047 μ F $\pm$ 10% 50V mylar
C512	6800PF $\pm$ 10% 50V mylar	C722	0.047 μ F $\pm$ 10% 50V mylar
C513	22 μ F +50% -10% 16V electrolytic	C723	1000PF $\pm$ 10% 50V mylar
C514	22 μ F +50% -10% 16V electrolytic	C724	1000PF $\pm$ 10% 50V mylar
C515	180PF $\pm$ 5% 50V polystyrol	C725	6800PF $\pm$ 10% 50V mylar
C516	180PF $\pm$ 5% 50V polystyrol	C726	6800PF $\pm$ 10% 50V mylar
C517	0.33 μ F $\pm$ 20% 35V tantalum	C727	0.068 μ F $\pm$ 10% 50V mylar
C518	0.33 μ F $\pm$ 20% 35V tantalum	C728	0.068 μ F $\pm$ 10% 50V mylar
C519	100 μ F +50% -10% 10V electrolytic	C729	1800PF $\pm$ 10% 50V mylar
C520	100 μ F +50% -10% 10V electrolytic	C730	1800PF $\pm$ 10% 50V mylar
C521	2.2 μ F $\pm$ 20% 10V tantalum	C731	3900PF $\pm$ 10% 50V mylar
C522	2.2 μ F $\pm$ 20% 10V tantalum	C732	3900PF $\pm$ 10% 50V mylar
C523	47PF $\pm$ 10% 50V ceramic	C733	1000PF $\pm$ 10% 50V mylar
C524	47PF $\pm$ 10% 50V ceramic	C734	1000PF $\pm$ 10% 50V mylar
C525	33 μ F +50% -10% 16V electrolytic	C735	1000PF $\pm$ 10% 50V mylar
C526	33 μ F +50% -10% 16V electrolytic	C736	1000PF $\pm$ 10% 50V mylar
C527	100 μ F +50% -10% 10V electrolytic	C737	0.022 μ F $\pm$ 10% 50V mylar
C528	100 μ F +50% -10% 10V electrolytic	C738	0.022 μ F $\pm$ 10% 50V mylar
C529	33 μ F +50% -10% 16V electrolytic	C739	0.027 μ F $\pm$ 10% 50V mylar
C530	33 μ F +50% -10% 16V electrolytic	C740	0.027 μ F $\pm$ 10% 50V mylar
C531	0.33 μ F $\pm$ 20% 35V tantalum	C741	10 μ F $\pm$ 10% 10V tantalum
C532	0.33 μ F $\pm$ 20% 35V tantalum	C742	10 μ F $\pm$ 10% 10V tantalum
C533	33 μ +50% -10% 16V electrolytic	C743	4.7P $\pm$ 10% 50V ceramic
C534	33 μ +50% -10% 16V electrolytic	C744	4.7P $\pm$ 10% 50V ceramic
C535	0.04 +80% -20% 50V ceramic	C745	33P $\pm$ 10% 50V ceramic
		C746	33P $\pm$ 10% 50V ceramic
C601	0.033 μ F $\pm$ 10% 50V mylar	C747	2.2 μ F $\pm$ 10% 25V tantalum


SYMBOL NO.	DESCRIPTION	SYMBOL NO.	DESCRIPTION
C748	2.2 μ F $\pm$ 10% 25V tantalum	C815	1 μ F X 2 +50% -10% 100V electrolytic
C749	47 μ F +50% -10% 50V electrolytic	C816	.01 μ F X 2 500V ceramic
C750	47 μ F +50% -10% 50V electrolytic	C817	.04 μ F X 2 +80% -20% 50V ceramic
C801	4.7 μ F X 2 $\pm$ 10% 10V tantalum	C818	47 μ F X 2 +50% -10% 16V electrolytic
C802	470PF X 2 $\pm$ 10% 50V ceramic	C901	0.22 μ F $\pm$ 10% 50V ceramic
C803	33 μ F X 2 +50% -10% 10V electrolytic	C902	0.22 μ F $\pm$ 10% 50V ceramic
C804	100 μ F X 2 +50% -10% 63V electrolytic	C903	220 μ F +50% -10% 10V electrolytic
C805	47P X 2 $\pm$ 10% 50V ceramic	C904	220 μ F +50% -10% 10V electrolytic
C806	47 μ F X 2 +50% -10% 16V electrolytic	C905	100 μ F +50% -10% 10V electrolytic
C807	100 μ F X 2 +50% -10% 50V electrolytic	C906	4.7 μ F +50% -10% 50V electrolytic
C808	1000P X 2 $\pm$ 10% 50V mylar	C907	22 μ F +50% -10% 50V electrolytic
C809	1000PF X 2 $\pm$ 10% 50V mylar	C908	100 μ F +50% -10% 50V electrolytic
C810	47PF $\pm$ 10% 50V ceramic	C909	330 μ F +50% -10% 35V electrolytic
C811	.022 μ F X 2 $\pm$ 10% 50V mylar	C910	330 μ F +50% -10% 35V electrolytic
C812	.022 μ F X 2 $\pm$ 10% 50V mylar	C911	220 μ F +50% -10% 16V electrolytic
C813	1 μ F x 2 +50% -10% 100V electrolytic	C912	100P $\pm$ 10% 50V ceramic
C814	.01 μ F X 2 500V ceramic		

TRANSISTORS & IC


SYMBOL NO.	DESCRIPTION	SYMBOL NO.	DESCRIPTION
Q101	FM RF AMPLIFIER 3SK30, 2SK19	Q801	POWER AMP 2SA620 X 2
Q102	FM MIXER 2SC535	Q802	POWER AMP 2SA620 X 2
Q103	FM LOCAL OSCILATOR SE3001	Q803	POWER AMP 2SC1103A X 2
Q201	FM IF AMPLIFIER 2SC381	Q804	POWER AMP 2SC1103A X 2
Q202	FM IF AMPLIFIER 2SC381	Q805	POWER AMP 2SC945 X 2
Q203	FM IF AMPLIFIER & LIMITTER LM703	Q806	POWER AMP 2SA733 X 2
Q204	FM LIMITTER TA7061AP	Q807	POWER AMP 2SC1431 X 2
Q205	FM AGC AMPLIFIER 2SC381	Q808	POWER AMP 2SA762 X 2
Q206	FM SIGNAL METER AMPLIFIER 2SC381	Q809	POWER AMP 2SC1079 X 2
Q207	FM MUTING DC AMPLIFIER 2SC372	Q810	POWER AMP 2SA679 X 2
Q208	WIRED OR GATE FOR FM MUTING 2SC372	Q901	POWER SUPPLY 2SC1382
Q209	FM MUTING DC AMPLIFIER 2SC1000	Q902	PROTECTION CIRCUIT 2SC945
Q210	FM MUTING DC AMPLIFIER 2SA640	Q903	PROTECTION CIRCUIT 2SC945
Q211	FM MUTING DC AMPLIFIER 2SC372	Q904	PROTECTION CIRCUIT 2SA733
Q212	FM MUTING DC AMPLIFIER 2SC372	Q905	PROTECTION CIRCUIT 2SC1382
Q213	WIRED OR GATE FOR FM MUTING 2SC372	Q906	PROTECTION CIRCUIT 2SC945
Q214	FM STEREO DEMODULATOR μ PC554C	Q505	PHONO AMP 2SC1345
Q215	FM MUTING 2SK30	Q506	PHONO AMP 2SC1345
Q216	FM MUTING 2SK30	Q507	MIC AMP 2SC1345
Q217	FM OUTPUT AMPLIFIER 2SC1000	Q508	MIC AMP 2SC1345
Q218	FM OUTPUT AMPLIFIER 2SC1000	Q509	MIC AMP 2SA640
Q219	ACTIVE DUMMY LOAD 2SC735	Q510	MIC AMP 2SA640
Q351	AM NOISE FILTER AMPLIFIER 2SC372	Q511	MIC AMP 2SC1345
Q401	AM RF AMPLIFIER 2SC381	Q512	MIC AMP 2SC1345
Q402	AM MIXER & OSCILATOR 2SC372	Q651	FILTER AMP 2SC1345
Q403	AM IF AMPLIFIER 2SC381	Q652	FILTER AMP 2SC1345
Q404	AM IF AMPLIFIER 2SC372		
Q451	MIC MIXER AMP 2SC1345	Q701	LINEAR EQ AMP 2SC1345
Q452	MIC MIXER AMP 2SC1345	Q702	LINER EQ AMP 2SC1345
Q501	PHONO AMP 2SC1345	Q703	LINER EQ AMP 2SC1345
Q502	PHONO AMP 2SC1345	Q704	LINER EQ AMP 2SC1345
Q503	PHONO AMP 2SA640	Q705	TONE AMP 2SC1345
Q504	PHONO AMP 2SA640	Q706	TONE AMP 2SC1345
		Q707	TONE AMP 2SC1345
		Q708	TONE AMP 2SC1345

■ POWER SUPPLY DIAGRAM FOR THE THREE MODELS


(1) SEMCO MODEL ①

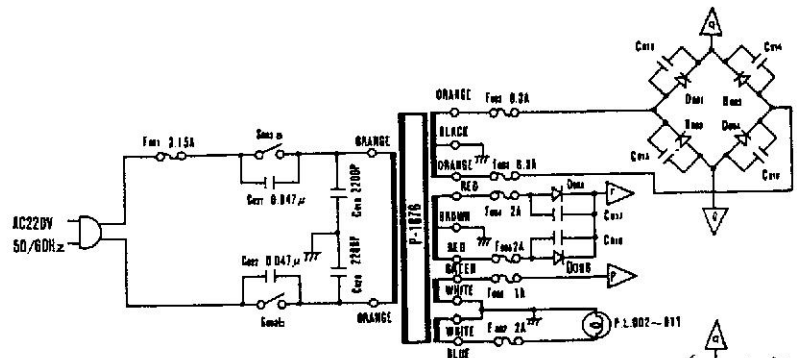

(2) EUROPEAN MODEL ①

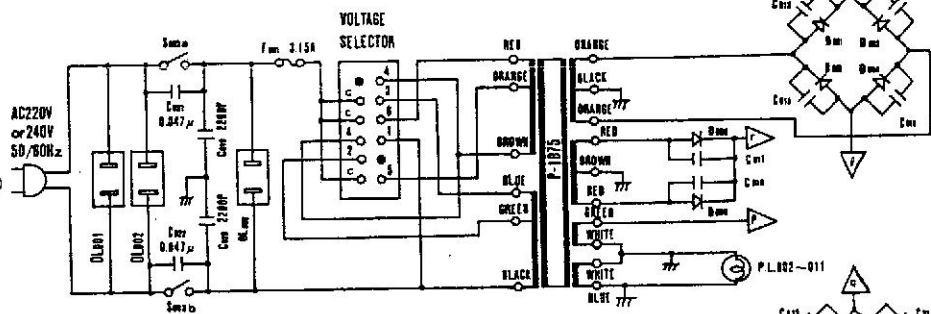

(3) U.S.A. & CANADIAN MODEL ①

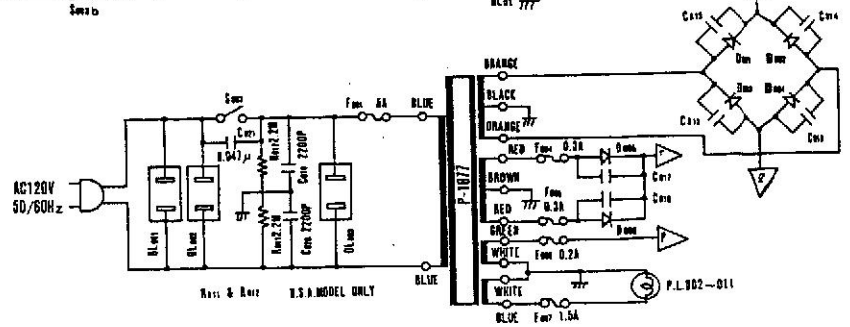

SWITCH
Sme1.....POWER

Cm1—Cm8 0.01μF
Dm1—Dm4 HI-FI SPECIAL
Dm5—Dm8 1N4003

DIODES

SYMBOL NO.	DESCRIPTION	SYMBOL NO.	DESCRIPTION
D001	RECTIFIER	D405	AUDIO & METER DETECTOR
D002	RECTIFIER	D406	METER PROTECTION
D003	RECTIFIER		
D004	RECTIFIER	D801	POWER AMPLIFIER
D005	RECTIFIER	D802	POWER AMPLIFIER
D006	RECTIFIER	D803	POWER AMPLIFIER
		D804	POWER AMPLIFIER
		D805	POWER AMPLIFIER
D201	CHECK POINT DETECTOR	D901	POWER SUPPLY
D202	FM LIMITTER	D902	PROTECTION CIRCUIT
D203	CHECK POINT DETECTOR	D903	PROTECTION CIRCUIT
D204	FM RATIO DETECTOR	D904	PROTECTION CIRCUIT
D205	FM RATIO DETECTOR		
D206	AGC DETECTOR		
D207	AGC DETECTOR		
D208	FM METER DETECTOR		
D209	VOLTAGE STABILIZER		
D210	TEMPERATURE COMPENSATION		
D211	NEGATIVE VOLTAGE PROTECTION		
D402	TEMPERATURE COMPENSATION		
D403	TEMPERATURE COMPENSATION		
D404	AGC DETECTOR		

ZENER DIODES

SYMBOL NO.	DESCRIPTION
ZD801	VOLTAGE BEGULATOR
ZD901	VOLTAGE BEGULATOR

VARIABLE RESISTORS

SYMBOL NO.	DESCRIPTION	SYMBOL NO.	DESCRIPTION
VR001	500Ω-B	VR401	1KΩ-B
VR002	200KΩ-B X 2	VR451	100KΩ-A X 2
VR201	4.7KΩ-B	VR701	100KΩ-B X 2
VR202	4.7KΩ-B	VR702	50KΩ-B X 2
VR203	4.7KΩ-B		
		VR801	4.7KΩ-B (X 2)
		VR802	330Ω-B (X 2)


SWITCHES

SYMBOL NO.	DESCRIPTION	SYMBOL NO.	DESCRIPTION
S001	4-8-6	S603	2-2
S002	2-4-6	S651	2-2
S003	2-2	S652	4-2
		S701	2-4-5
		S702	2-3
		S703	2-3
		S751	2-2
		S901	2-3
		S902	4-3
		S903	3-3

TRANSFORMERS & FILTERS

SYMBOL NO.	DESCRIPTION	SYMBOL NO.	DESCRIPTION
T001	POWER TRANS	T204	FM METER TRANS
		T205	19KHz TRANS
		T206	38KHz TRANS
		T207	19KHz TRANS
		T401	AM RF TRANS
		T402	AM OSCILATOR TRANS
		T403	AM IF TRANS


- RF SECTION

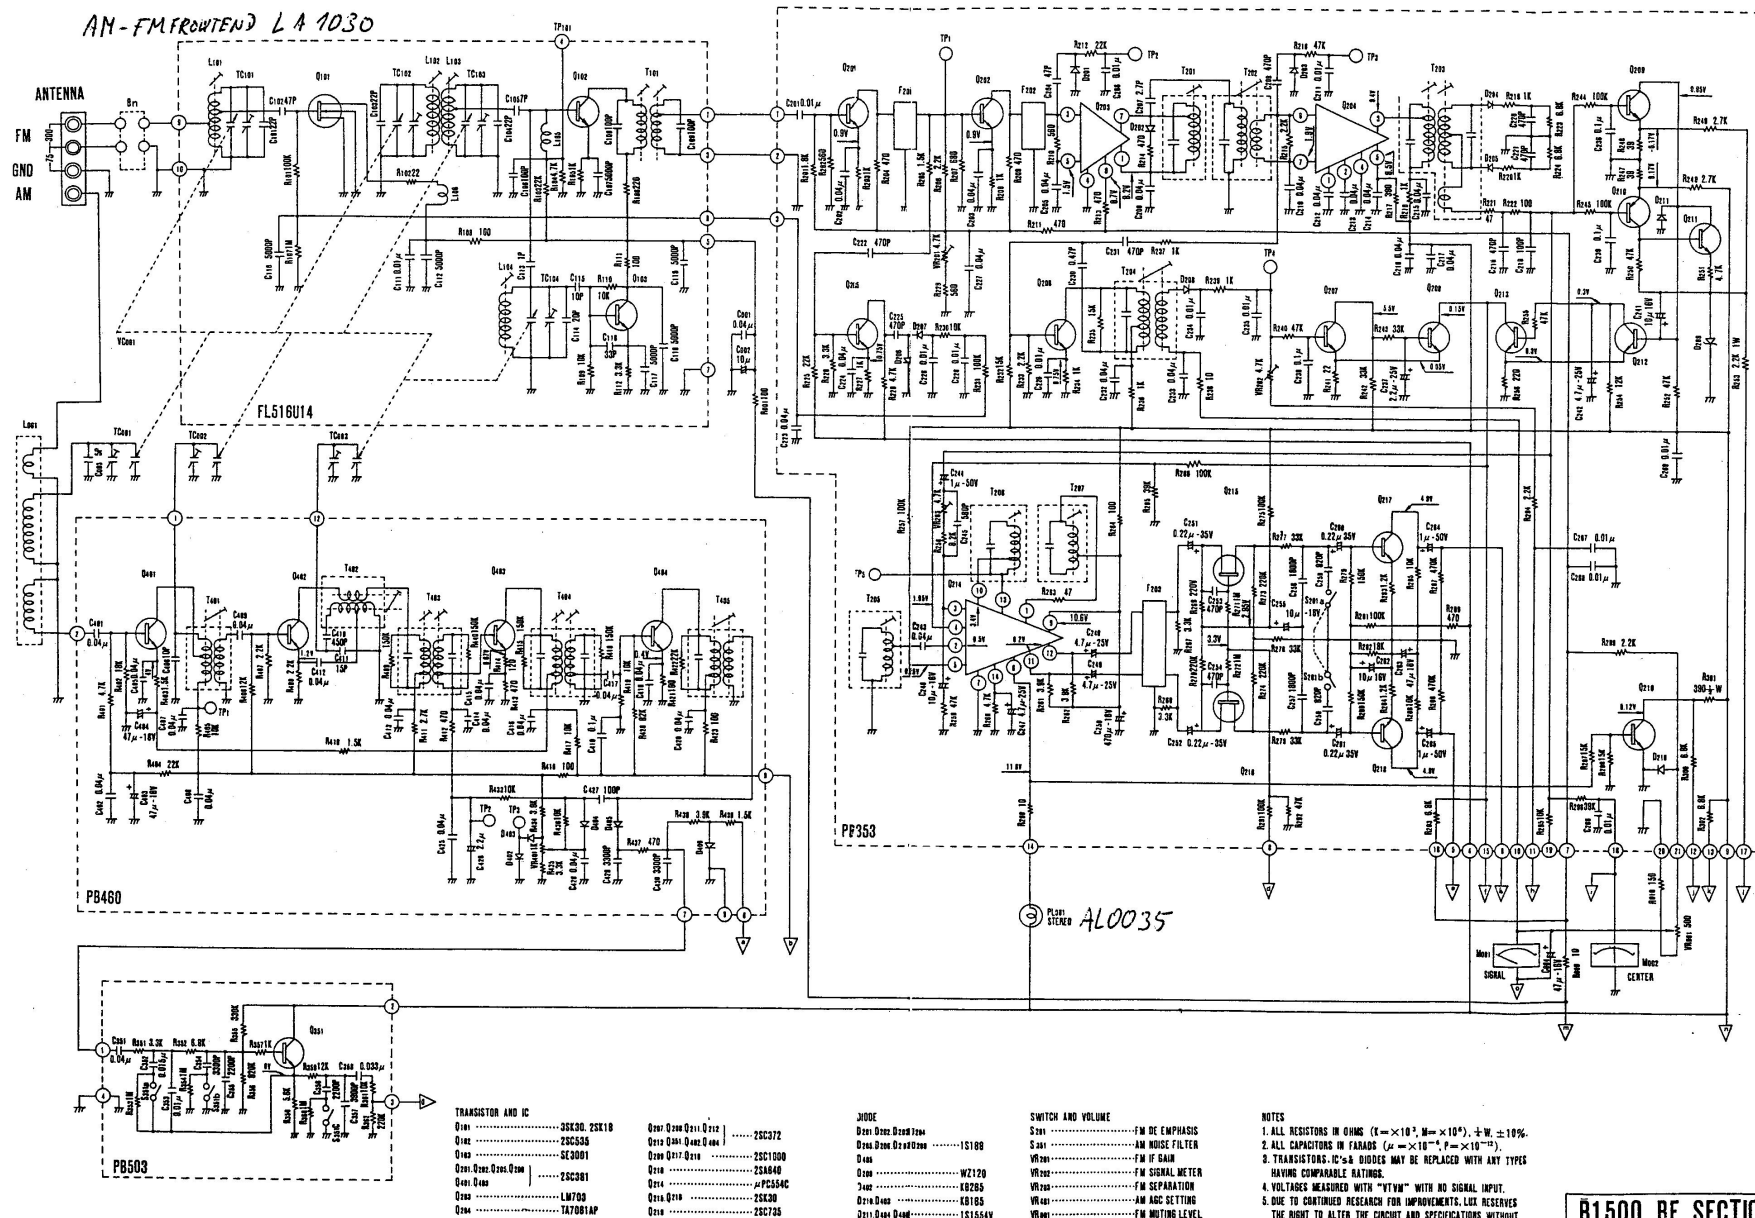

NOTES

1. ALL RESISTORS IN OHMS ($R = \times 10^3$, $M = \times 10^6$), $\pm W \pm 10\%$.
2. ALL CAPACITORS IN FARADS ($\mu = \times 10^{-6}$, $P = \times 10^{-12}$).
3. TRANSISTORS, IC's & DIODES MAY BE REPLACED WITH ANY TYPES HAVING COMPARABLE RATINGS.
4. VOLTAGES MEASURED WITH "VTVM" WITH NO SIGNAL INPUT.
5. DUE TO CONTINUED RESEARCH FOR IMPROVEMENTS, LSI RESERVES THE RIGHT TO ALTER THE CIRCUIT AND SPECIFICATIONS WITHOUT NOTICE.
6. COMPONENTS MARKED S201, C202 AND C204 ARE FITTED TO ① MODEL.
7. C202 & C203 = 2700PF ① MODEL ONLY.

R1500 RF SECTION

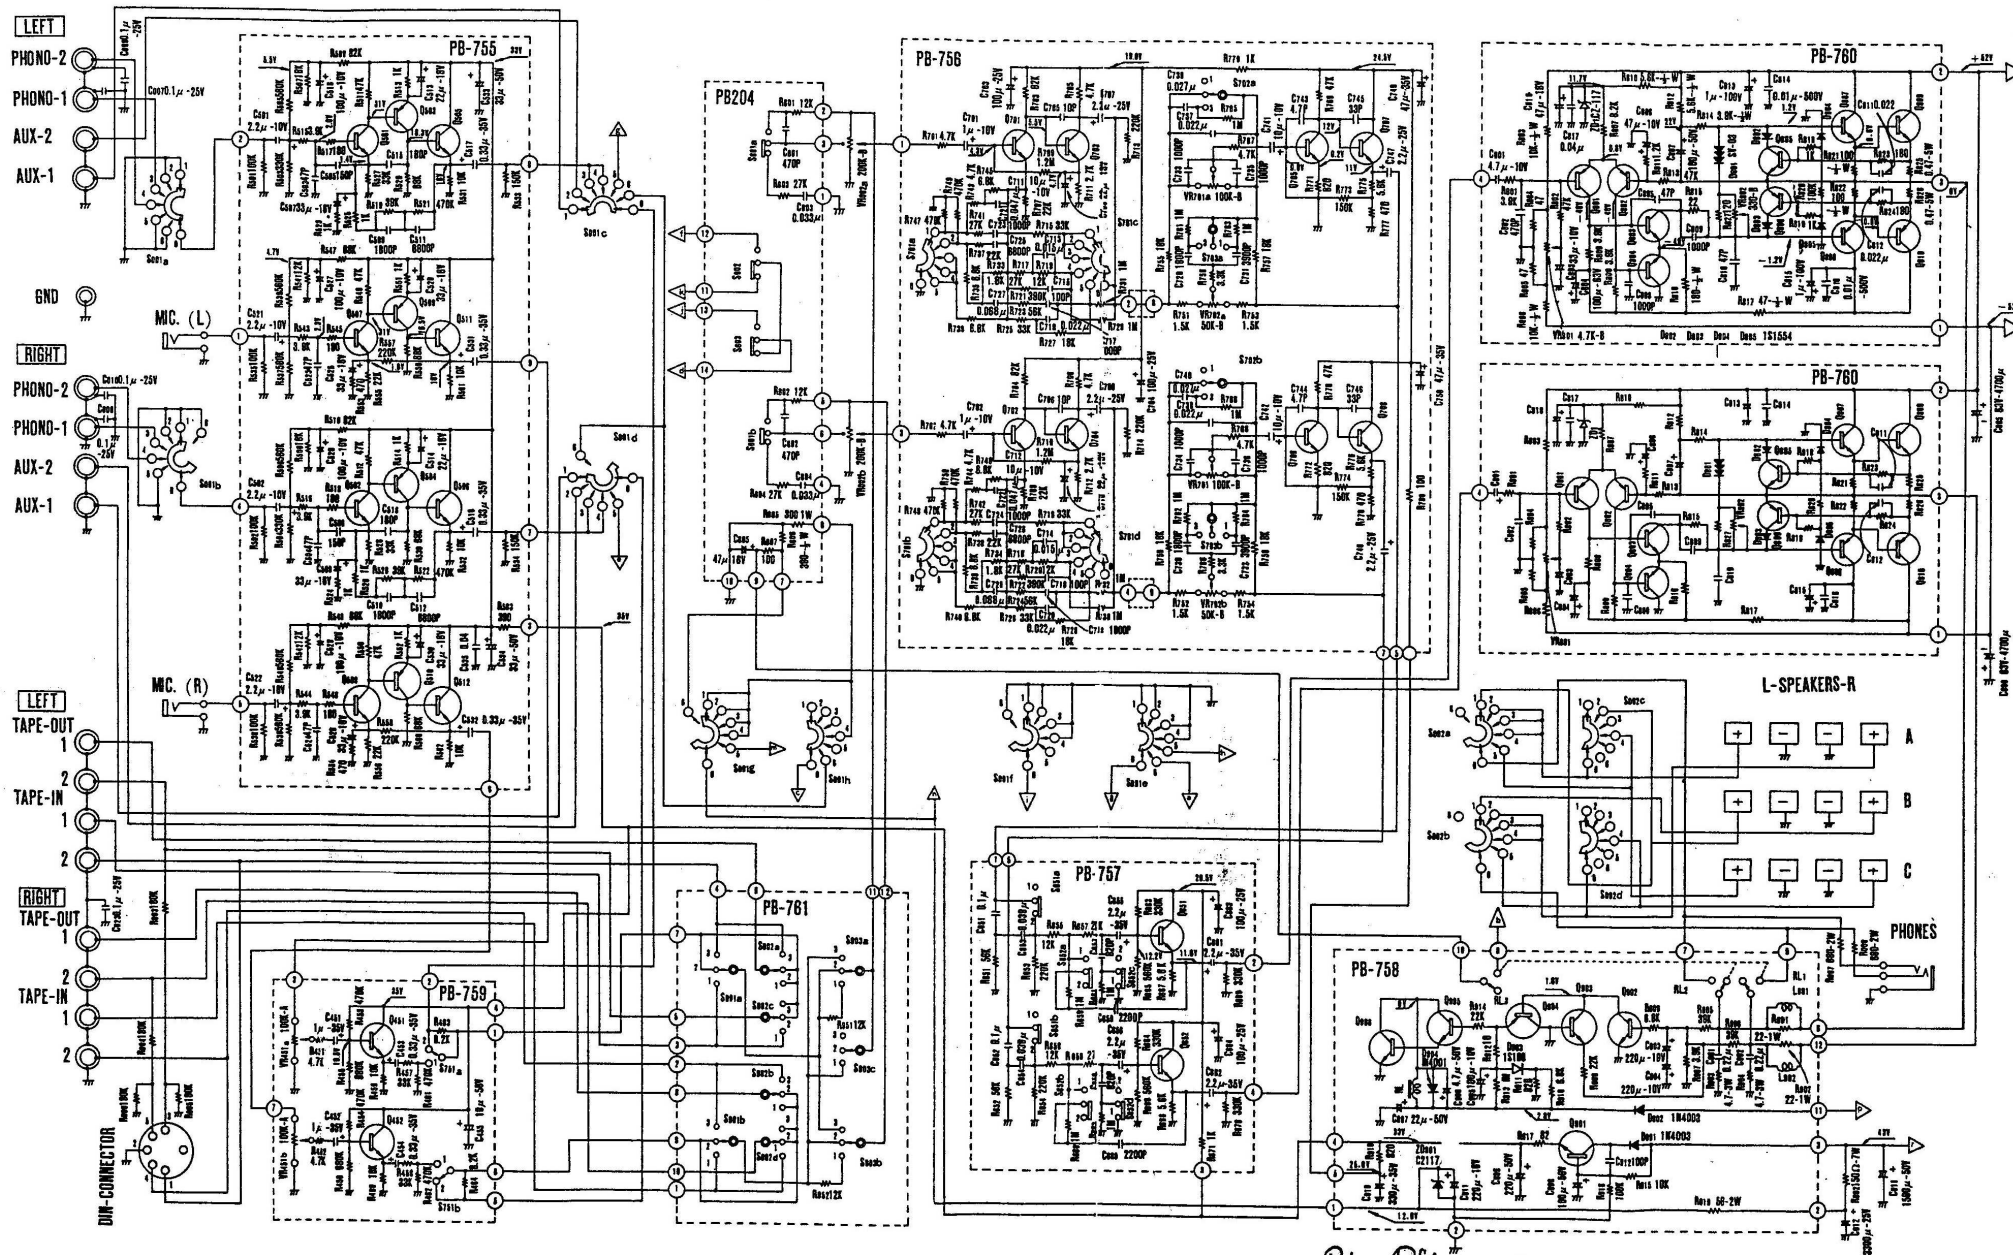

RL-74 0002

SWITCH	FUNCTION	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
SW1	SW1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
SW2	SW2	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
SW3	SW3	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
SW4	SW4	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
SW5	SW5	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
SW6	SW6	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
SW7	SW7	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
SW8	SW8	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
SW9	SW9	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
SW10	SW10	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
SW11	SW11	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
SW12	SW12	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
SW13	SW13	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
SW14	SW14	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
SW15	SW15	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
SW16	SW16	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
SW17	SW17	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	4																																																										

VOLUME
VR402 VR407 **VOLUME CONTROL**
VR701 VR706 **BASS CONTROL**
VR702 VR707 **TREBLE CONTROL**
VR401 VR406 **MIC-MIXING CONTROL**

TRANSISTOR

Q431, 432	Q401, 447	Q545, 506	}.....2SC1345
Q407, 509	Q411, 517	Q701-708	
Q462, 504	Q408, 519		2SA840
Q401, 502			2SA820
Q503, 504			2SC1103A
Q406	Q502, 503, 509		2SC045
Q406	Q404		2SA782
Q407			2SC1421

```
Q000 .....25A76Z
Q000 .....25C107Z
Q010 .....25A879
Q001,005 .....25C138Z
```

R1500 AUDIO SECTION

SYMBOL NO.			DESCRIPTION			SYMBOL NO.			DESCRIPTION		
T404	AM IF TRANS	V6AQC-20025AA	L103	FM RF COIL							
T405	AM IF TRANS	YMC-15002A	L104	FM OSCILATOR COIL							
L001	AM ANTENNA	LUX-16132	F201	FM IF FILTER						CF10M-12C	
L101	FM ANTENNA COIL		F202	FM IF FILTER						CF10M-12C	
L102	FM RF COIL		F203	FM LOW-PASS FILTER						LUX-14562	

LAMPS

SYMBOL NO.			DESCRIPTION	SYMBOL NO.			DESCRIPTION
PL001	12V	30mA	FOR FM STEREO INDICATOR	AL0035	PL006	12V 1.5W	FOR DIAL ILLUMINATION
PL002	12V	1.5W	FOR DIAL ILLUMINATION	AL 0012	PL007	12V 1.5W	FOR DIAL ILLUMINATION
PL003	12V	1.5W	FOR DIAL ILLUMINATION		PL008	12V 1.5W	FOR DIAL ILLUMINATION
PL004	12V	1.5W	FOR DIAL ILLUMINATION		PL009	12V 1.5W	FOR DIAL ILLUMINATION
PL005	12V	1.5W	FOR DIAL ILLUMINATION		PL010	12V 1.5W	FOR DIAL ILLUMINATION

FM/AM Frontend LA 1030 FL 516 U 14

LUX CORPORATION, JAPAN

HEAD OFFICE & FACTORY 1-8-31 NAGAHASHI, NISHINARI-KU, OSAKA
 PHONES: 632 0031 CABLE: LUXELECT OSAKA
 TELEX: J63694