

Rollei XF 35

The new fully automatic
full-frame 24x36 mm
compact camera.

RCUD 1-15-'76




What do you look for when you buy a new camera?

Pin sharp pictures every time, of course. And you want a camera that can always cope. It must be small and light enough to take with you everywhere. It must be fully automatic for instant shooting. It must take films you can buy anywhere. And it must be

solidly made – in the body as well as every feature. For you want a camera that will give you pleasure for many years.

Rollei has what you are looking for: the new fully automatic Rollei XF 35 miniature camera.

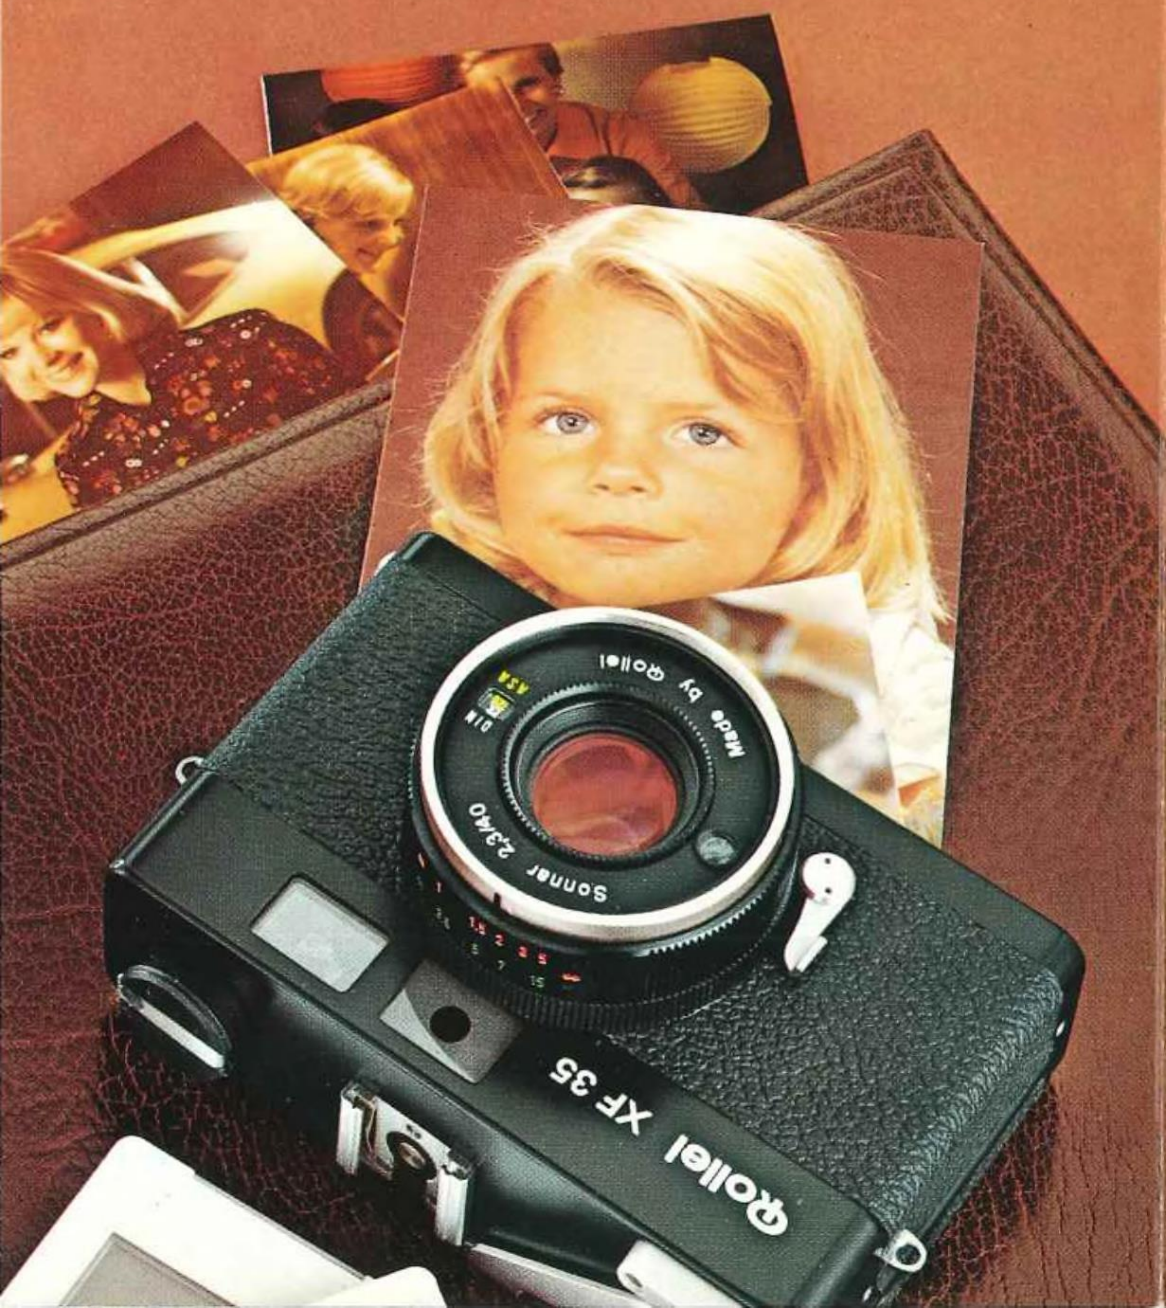

Rollei XF 35: Compact yet fully automatic.

The Rollei XF 35 goes with you everywhere to capture thrilling instants as brilliant pictures and transparencies. You just set the distance before you shoot – and the coupled rangefinder helps to keep your shots sharp every time. On the Rollei XF 35 the aperture and exposure time set themselves automatically.

High-performance top-class lens.

The 40 mm Sonnar* f/2.3 lens was specially developed for this camera by Carl Zeiss. Its outstanding contrast and resolving power make for first class pictures.

CdS exposure automation.

The automatic CdS system sets the exposure time and aperture according to the prevailing light conditions. Forget about wrongly exposed pictures.

The bright-line finder.

A glance through the finder gives you all the relevant information for the shot. Parallax marks indicate the exact field of view, even in close-ups. A scale shows the aperture and exposure time. And a red signal warns you when the light is too poor for a correct exposure.

Rapid winding lever

Frame counter

Release with cable release socket

Focusing ring with distances in metres and feet

Self-timer tensioning lever

Exposure metering CdS cell

Hot shoe with X contact (e. g. for electronic flash)

Rewind crank

Rangefinder

Bright-line finder

Setting ring for automatic operation, long time exposures and flash coupling

Film speed window

Film speed setting ring



Thrilling technical perfection.

Built-in flash automation.

Simply fit your flash gun into the hot shoe – without getting a flash lead in the way. Then you only have to switch to the flash range, and select the guide number – that is all. The automatic flash control makes sure of correctly exposed flash shots, too.

Technical perfection – in detail, too.

The battery compartment is accessible from outside – you can change batteries any time.

The special take-up spool allows rapid and positive film loading.

The self-timer gives you 10 seconds to get into the picture.

On loading, the frame counter automatically returns to zero.

Parallax indicator

Aperture scale

Shutter speed scale



Bright-line finder

Warning signal for underexposure

Meter needle

Technical data.

Camera type:

Fully automatic compact
24 x 36 mm rangefinder
camera.

Lens:

40 mm Sonnar* f/2.3, made
by Rollei.

Screw-in filter size:

46 mm (M 46 x 0.75).

Focusing range:

1 metre (3 1/2 feet) to infinity.

Shutter speed:

1/30 to 1/650 second and B.

Flash outlet:

Hot shoe.

Automatic flash control:

Automatically couples
distance and apertures on
setting the guide number.

Exposure automation:

Programmed CdS exposure
control.

Film speed range:

25 to 400 ASA (15 to 27 DIN).

Finder signals:

Pointer indicates shutter
speed/aperture combination;
red underexposure warning.

Release:

Release button with cable
release socket.

Self-timer:

Approx. 10 seconds delay.

Battery:

One 1.35 volt cell
(PX 625 or equivalent).

Tripod bush: 1/4 inch.

Size:

Approx. 112 x 32 x 71 mm
(4.4 x 1.3 x 2.8 inches).

Weight:

Approx. 355 grams
(12 1/2 ounces).

Accessories:

Soft case with zip fastener.

* This lens is made by the Rollei Group under licence from Carl Zeiss,
Oberkochen, West Germany.

Rollei
Progress in photography.



Orgin archive.org