



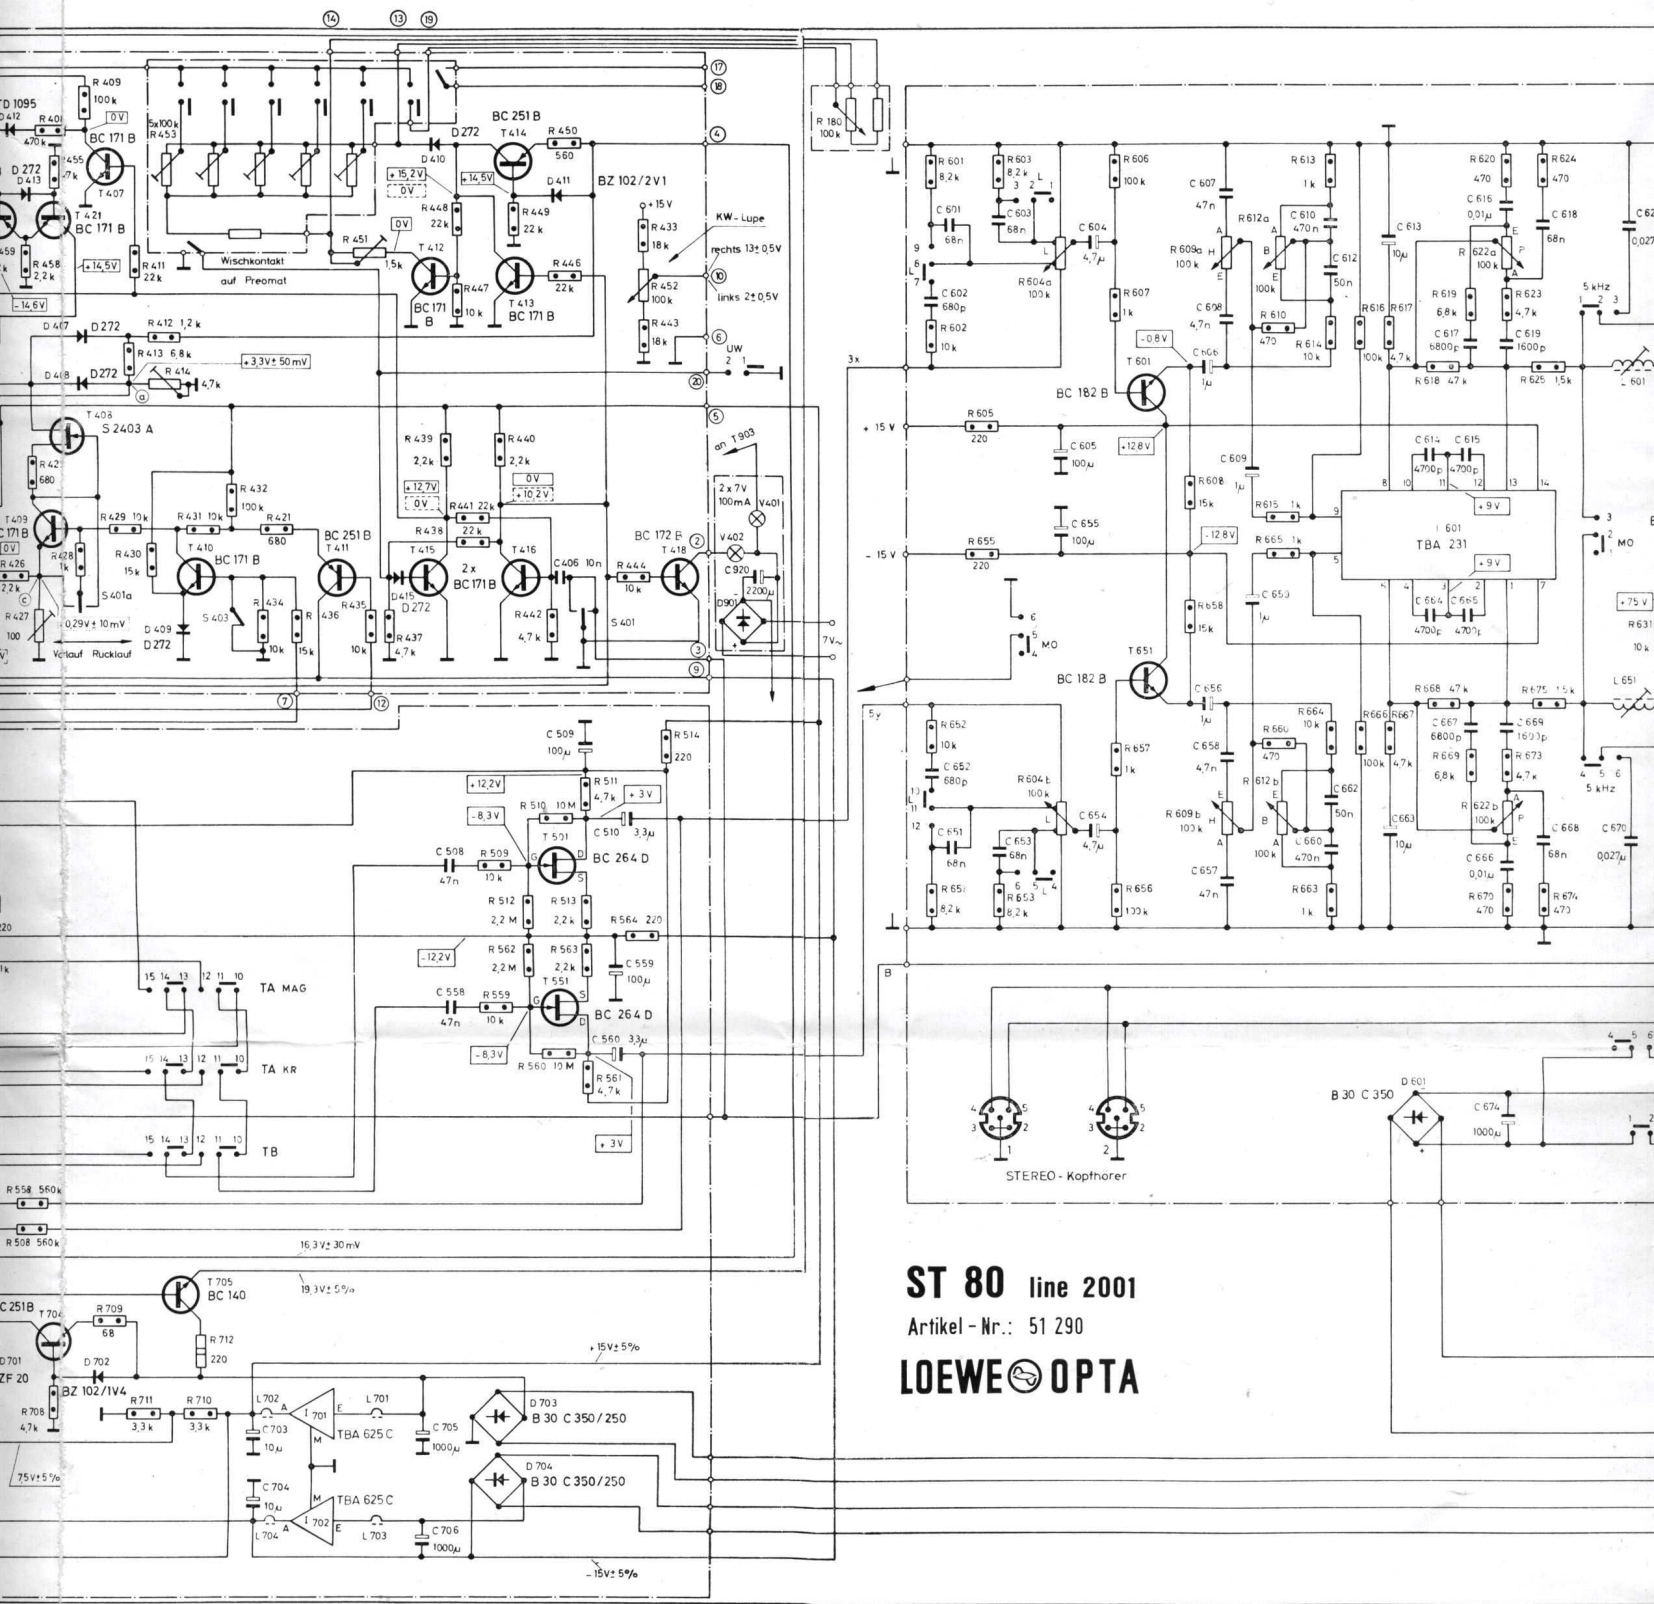


ST 80 line 2001

Artikel - Nr.: 51 290

LOEWE OPTA

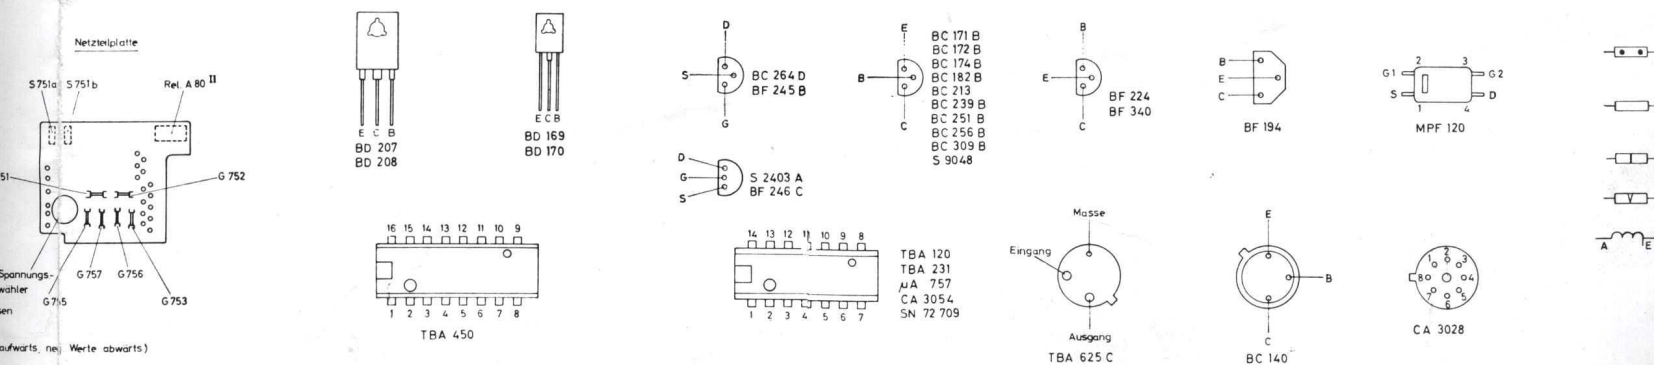

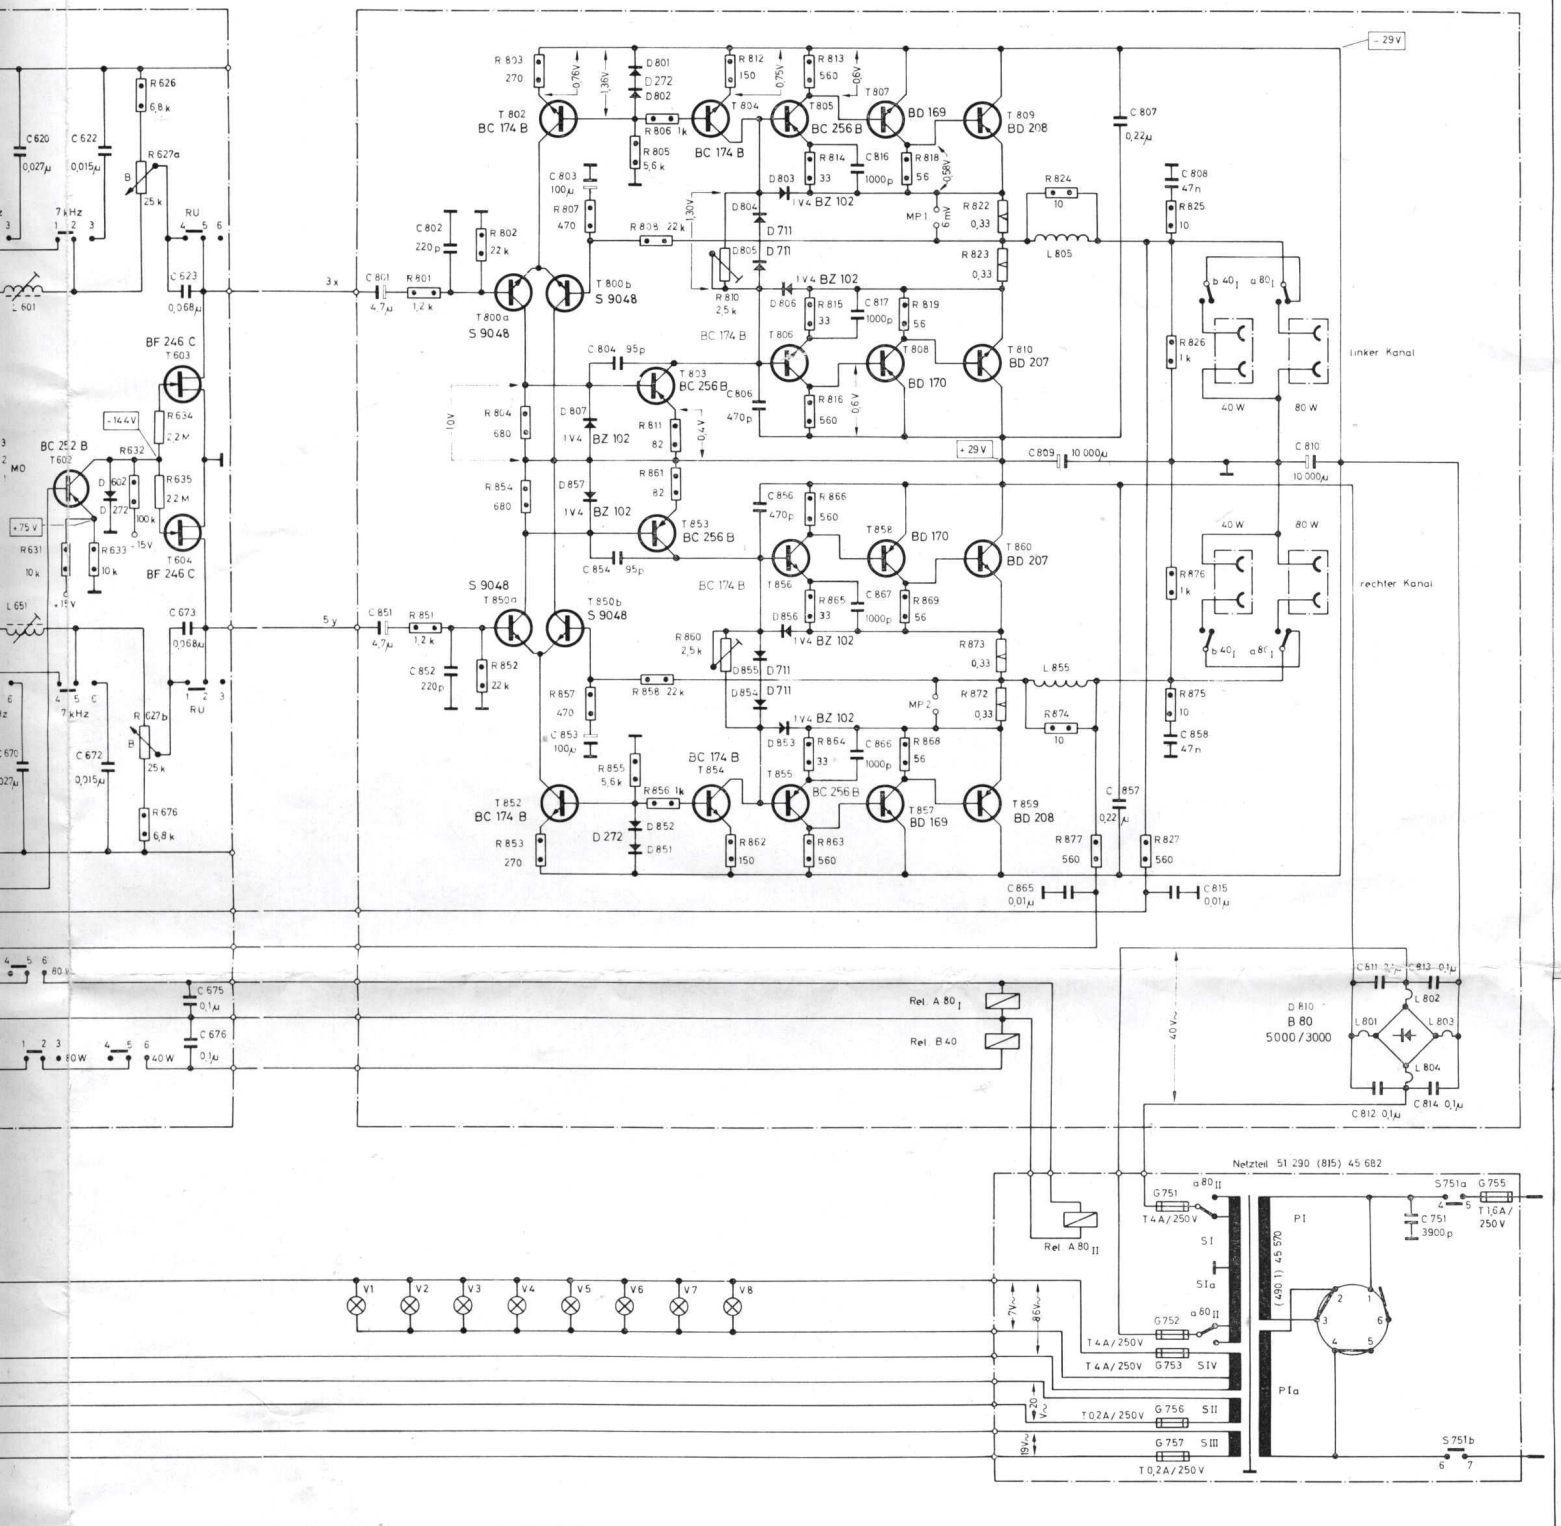

	Bereich	Os	Zw - Kr	Vorkreis	Abgleichfrequenz	ZF
UW	87,5 MHz 104,0 MHz	87,6 MHz 103,8 MHz	L 106 C 117	L 103 C 108	L 102 C 102	88,3 MHz 103,0 MHz
K1	3,0 MHz 5,4 MHz	3,1 MHz 6,3 MHz	L 315 C 338	—	L 306 C 311	3,5 MHz 6,0 MHz
K2	5,75 MHz 12,3 MHz	5,85 MHz 12,075 MHz	L 316 C 342	—	L 303 C 314	6,09 MHz 11,5 MHz
K3	11,8 MHz 22,1 MHz	11,9 MHz 22,0 MHz	L 317 C 346	—	L 310 C 317	12,6 MHz 21,0 MHz
MW	513 kHz 1620 kHz	518 kHz 16,05 kHz	L 314 C 334	—	L 305, L 302 C 308, C 322	580 kHz 1460 kHz
LW	147 kHz 350 kHz	150 kHz 343 kHz	L 312 C 328	—	L 303, L 301 C 305	160 kHz 300 kHz
Abgleichreihenfolge LW, MW, K1, K2, K3, FA MW, FA LW						
KW Lupe in Mitteleinstellung						
L 101 60 / 240 Ω L 102 4 1/5 / 0,8 L 103 4 1/5 / 0,8 L 104 I 20 1/4 / 0,12 II 3 1/4 / 0,12 L 106 3 1/5 / 0,8 L 107 I 10 1/4 / 0,12 II 3 3/4 / 0,12 L 109 129 / 0,1 L 201 I 51 1/4 / 0,08 II 5 1/4 / 0,08 L 203 3300 / 0,071 L 301 185 / 0,1 L 302 55 / 40 x 0,05 L 303 450 / 0,08 L 305 I 145 / 0,04 II 425 / 0,08 L 307 I 21 / 6 x 0,03 II 103 / 0,08 L 309 I 10 / 6 x 0,03 II 46 / 0,08 L 311 I 5 1/2 / 0,3 II 28 / 0,08 L 313 II 119 3/4 / 0,071 I 11 3/4 / 0,08 L 314 101 3/4 / 0,08 L 315 15 3/4 / 0,125 L 316 8 1/2 / 0,125 L 317 4 1/2 / 0,17 L 601 1800 / 0,071 L 651 L 801 L 802 L 803 L 804 L 805 4 μH L 855 4 μH L 901 I 200 / 0,12 II 100 / 0,12 III 300 / 0,12 L 902 I 365 / 0,1 II 365 / 0,1 L 904 I 200 / 0,12 II 100 / 0,12 III 300 / 0,12 L 905 365 / 0,16 L 906 2100 / 0,071 L 907 2100 / 0,071 F 101 (386) 45 635 F 102 (290) 45 636 F 201 (290) 45 646 051 Netzübertrager P86 Bv. 51 290 (490) 45 570 PI 110V ~ 460 / L 0,63 S1 220V ~ 80 + 12 / L 1,25 SII 215V ~ 90 / L 0,315 SIII 19,6V ~ 82 / L 0,315 PIa 110V ~ 460 / L 0,63 S1a 220V ~ 80 + 12 / L 1,25 SIV 88V ~ 29 + 8 / L 1,25						