


Garrard SP 25mk 111 module



*© beim Hersteller
Archiv Michael-Otto*

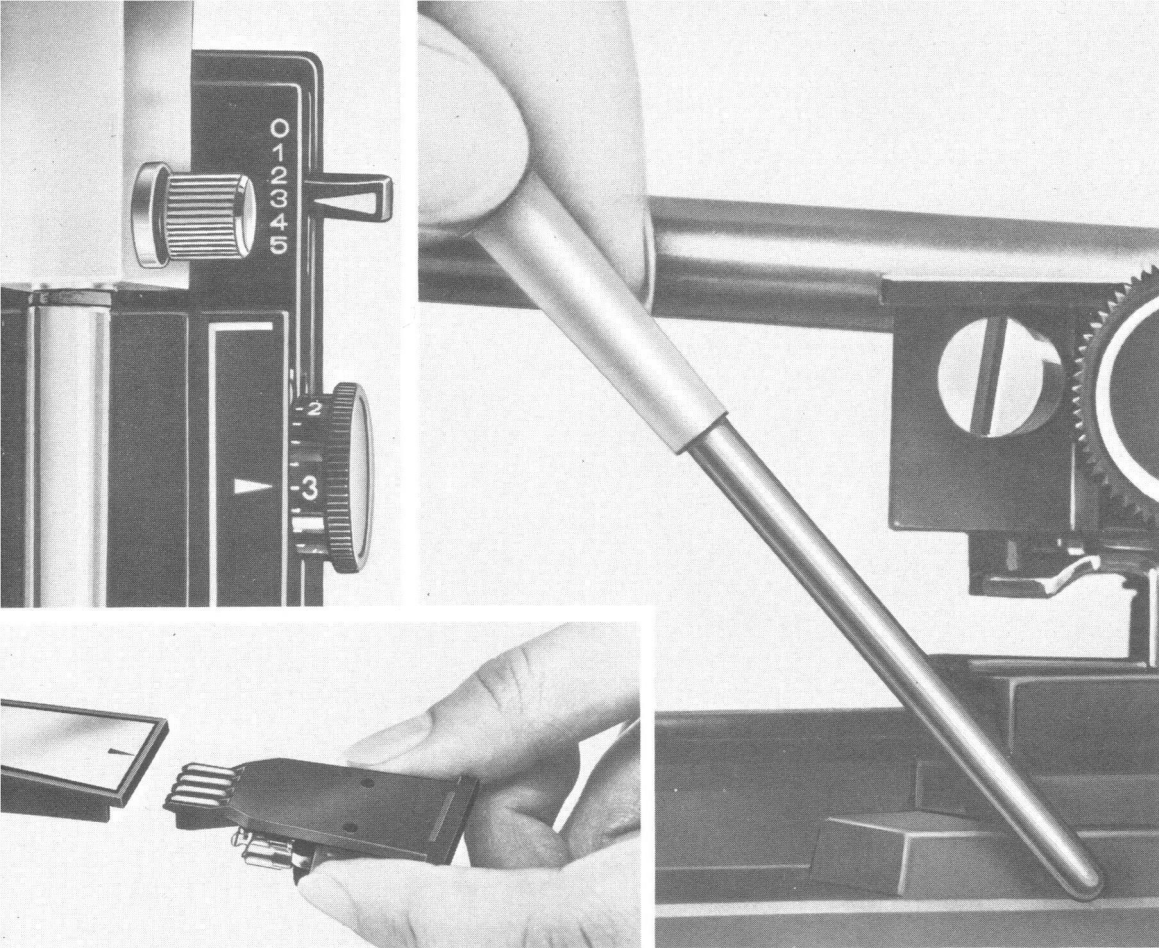

Garrard SP25mk 111 module

Type:

Single record playing unit
Facility for automatic single play

Motor:

4- pole induction

Power requirements:

110 to 125V, 220 to 240V
50Hz or 60Hz

Power consumption:

9 watts (approx.)

Mains switch:

Double pole switch with
suppressor

Turntable:

Aluminium platter 267 mm/10½ in

Spindles (supplied):

Short manual spindle
Large centre hole record, single
play adaptor

Record play:

Plays single records automatically
or manually as required

Record speeds:

33⅓, 45, 78 rev/min

Record size selector:

Manual linked with speed
selector

Pickup arm:

Tubular aluminium
Resiliently mounted counter-
balance weight
Precision loaded ball bearing
pivots
Slide-in cartridge carrier C2

Stylus force:

Calibrated 0 to 5 gms.
Minimum recommended 2 gms.

Bias compensator:

Calibrated

Performance:

Within DIN 45 500
Wow and flutter better than 0.14%
R.M.S.
Rumble (relative to 1.4 cm/sec @
100Hz) better than - 46 dB

Base and cover:


Low resonance base with teak
style trim
Injection moulded lift-off hinged
cover

Fittings:

2-core double insulated flex to
mains (earth return through
pickup screen via amplifier)
Screened phono-leads fitted with
5-pin DIN plug

Overall dimensions (approx.):

426 mm/16¾ in. wide
381 mm/15 in. front to rear
181 mm/7⅛ in. high in closed
position and 432 mm/17 in. in
open position
Unit can be played with cover
in the closed position

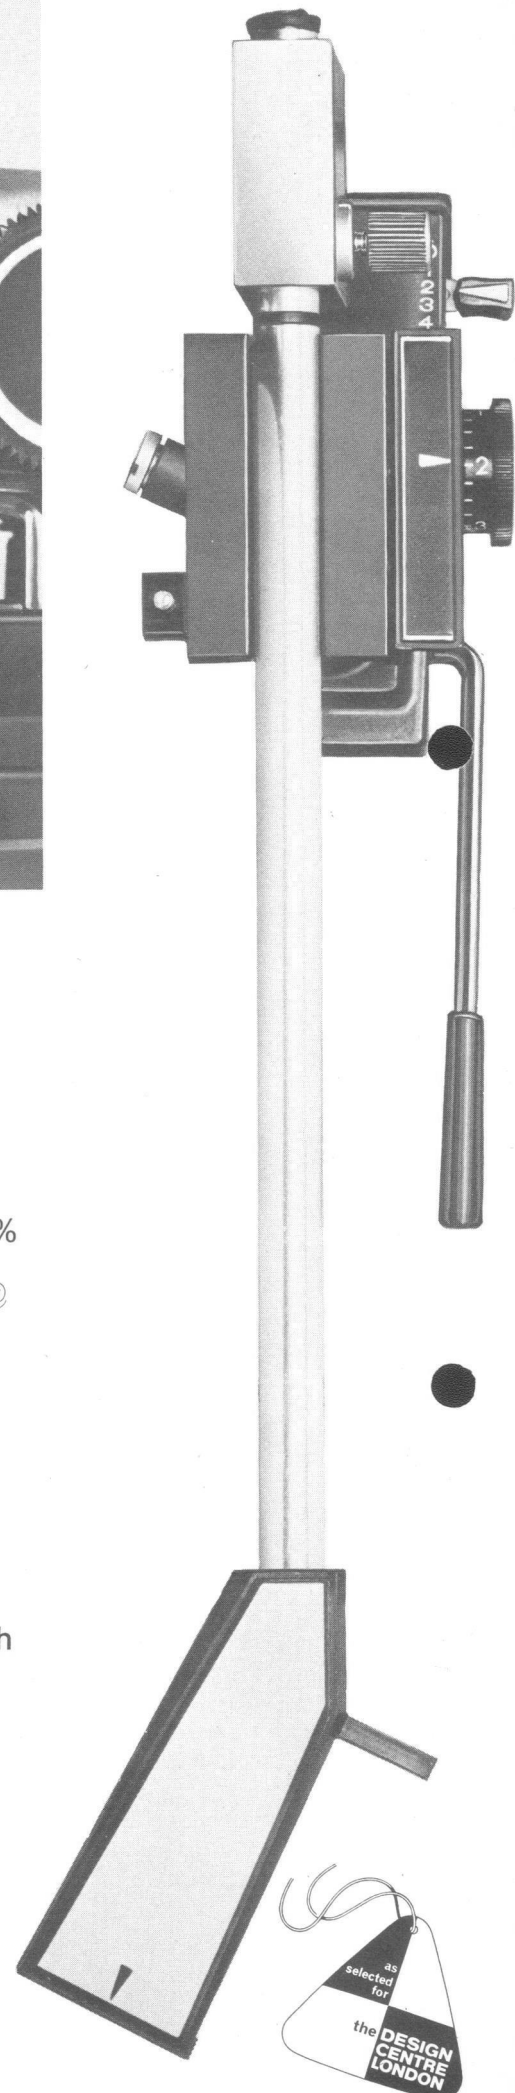

Garrard
A PLESSEY QUALITY PRODUCT

Garrard, Newcastle Street,
Swindon, Wiltshire, England. Telephone: Swindon 5381

Plessey Consumer Electronics Division