


SANSUI QD 5500S 2/4 Channel record/ playback Tape Deck

- 2 Channel record/playback in forward mode.
- 4 Channel record/playback in forward mode.
- 2 Channel playback in reverse mode.
- Variable recording bias for optimum performance from low-noise tapes.
- Separate record/playback level controls for each of the 4 Channels with master record level control.
- Four separate line and microphone inputs.
- Facility to connect optional Sansui SRC-2 remote control unit to control fast wind, play, stop and reverse functions.
- Optional Sansui SDC-5 dust cover.

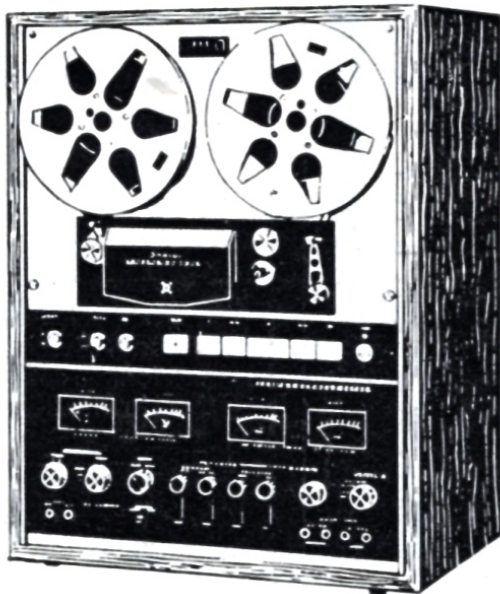

Technical Specification

Track system: 4 track 4 Channel Recording/playback forward, 4 track 2 Channel playback reverse. Reel size (max.) 7". Tape speeds 7 1/2 ips. (19 cm/sec.); 3 3/4 ips (9.5 cm/sec.). Tape speed accuracy $\pm 0.5\%$. Heads: 4-track ERASE; 4-track RECORD; 4-track PLAYBACK. Motors: 4/8 pole two-speed hysteresis synchronous capstan drive, 6-pole induction reel drive. Wow and flutter: at 7 1/2 ips. 0.07%; at 3 3/4 ips. 0.12%. Frequency response: at 7 1/2 ips. 20-20,000 Hz ± 3 dB; at 3 3/4 ips. 30-12,000 Hz ± 3 dB. S/N ratio 60 dB; Crosstalk 60 dB; Separation 50 dB. Harmonic distortion: Playback amplifier 0.15%; Tape distortion (record playback total) 1.2%; Erasure 60 dB; Bias oscillator frequency 100 kHz.

Rec. Ret. Price (inc. VAT) £535.93

Comet Price (inc. VAT) £428.75



Hofkamp & van Droffelaar

*Specialisten in vintage HiFi en analoge camera techniek
met eigen technische dienst.*

Jan G. Hofkamp
Hoornsedijk 9
9752 XJ Haren

050 - 534 15 06
06 - 38 18 34 64
info@dehofkeuken.nl