


THE PREMIER FAMILY
OF STEREO SOUND REPRODUCERS

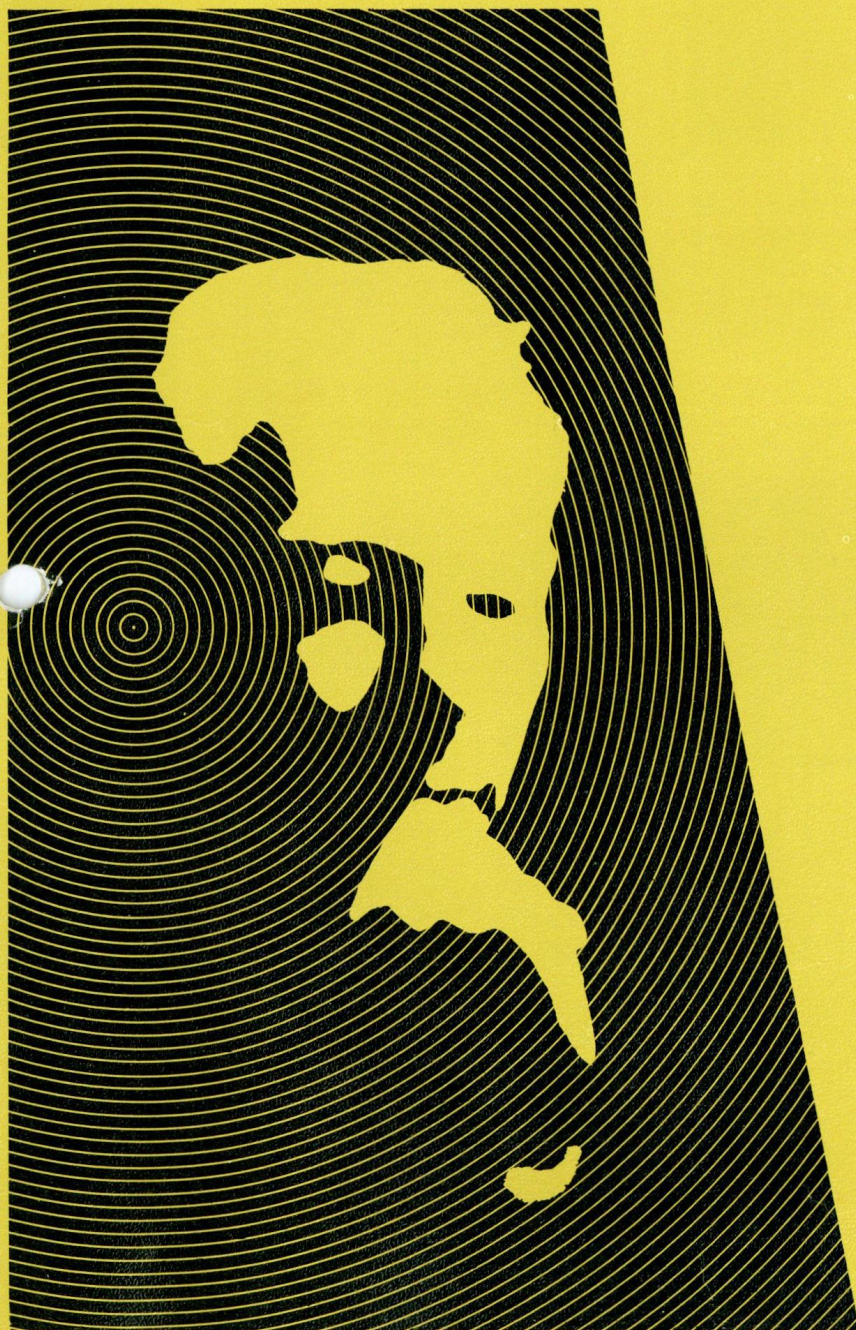


high fidelity phono cartridges
replacement styli
tone arms
preamplifier
headphone amplifiers
stylus force gauge

THE ALL-IMPORTANT SOURCE OF SOUND

True high fidelity sound re-creation begins at the *source of sound*. Since the stylus is the only point of contact between the record and phonograph system, the sound can be no better than the cartridge. This breathtakingly precise miniaturized electric generator (that's really what it is) must carry the full burden of translating the miles-long stereo record groove into usable electrical impulses . . . and should do this without adding or subtracting from what is on the recording. Knowing this, Shure quality standards are rigidly maintained at the highest levels.


ABOUT TRACKABILITY

Trackability is the measure of a cartridge's *total* performance. The "secret" of High Trackability is to enable the stylus tip to follow the hyper-complex record groove not only up to but beyond the theoretical cutting limits of today's modern recordings—not only at a select and discrete frequency, but across the entire audible spectrum—at *light tracking forces* that are below both the threshold of audible record wear and excessive stylus tip wear.

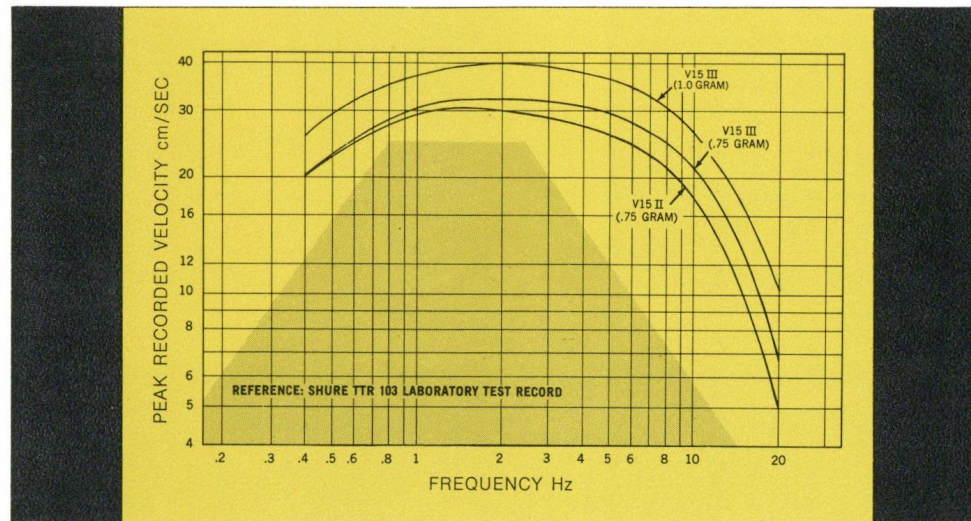


The trackability curve above dramatizes the differences in trackability between the V-15 Type II Improved (shown at $\frac{3}{4}$ gram) and the extraordinary Shure V-15 Type III (shown at $\frac{3}{4}$ and 1 gram). The shaded area represents the recommended theoretical limits for cutting recorded velocities. *Peak recorded velocities* are shown up the left edge, *frequency range* is registered across the bottom. *The smoother the curve of the cartridge being tested and the greater its distance above the shaded area, the greater its trackability.*

Any good cartridge
will track
these grooves . . .

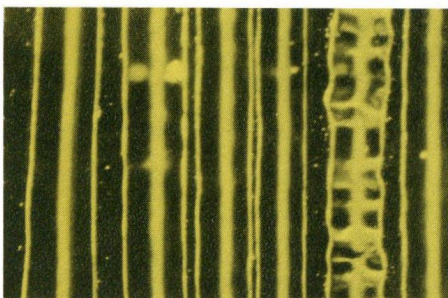

but only a high
trackability cartridge can
cope with this groove!

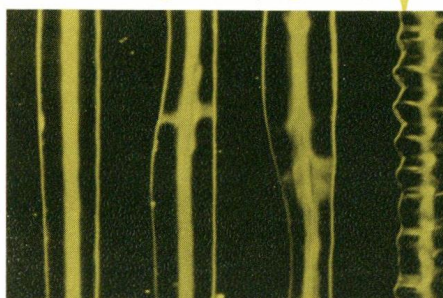

THE RECORD GROOVE

The photomicrograph above left portrays an errant, hard-to-track castanet sound in an otherwise conservatively modulated recording. The somewhat more heavily modulated grooves shown above right are an exhilarating combination of flutes and maracas with a low frequency rhythm complement from a recording cut at sufficiently high velocity to deliver precise and definitive intonation, full dynamic range, and optimum signal-to-noise ratio. Neither situation is a rarity, far from it. They are the very essence of today's highest fidelity recordings. But when played with an ordinary "good" quality cartridge, the stylus invariably loses contact with these demanding grooves—the castanets sound raspy, while the flute and maracas sound fuzzy, leaden, and "torn apart." One of the most common, most universally audible examples of mistracking occurs on vocal recordings when a cartridge attempts to track sibilant "sss" and "th" sounds. Mistracking here produces clearly audible, intrusive "sibilant distortion." Increasing tracking weight to *force* the stylus to stay in the groove will literally shave off the groove walls. Only High Trackability cartridges will consistently and effectively track all the grooves in today's recordings at light, record-saving pressures . . . even with cymbals, orchestral bells, and other difficult-to-track instruments. They will preserve the fidelity and reduce distortion from all your records, old and new.

SHURE
CARTRIDGES
AT A
GLANCE

PATENT NOTICE. ALL SHURE DYNETIC CARTRIDGES, STYLI AND PROFESSIONAL TONE ARMS ARE MANUFACTURED UNDER ONE OR MORE OF THE FOLLOWING U.S. PATENTS: 2,983,516; 3,055,988; 3,077,521; 3,077,522; 3,463,889; D183,366; D185,168; D187,229; D187,230; D189,144; D193,006; D193,007; D193,854; D193,934; D201,802; D201,803. OTHER PATENTS PENDING.

	Model No.	Page No.	Trackability CM/SEC.				Trackability Measured at (Grams)	Tracking Force Range	Stylus Configuration	Type
			400 Hz	1000 Hz	5000 Hz	10,000 Hz				
SUPER-TRACK (PLUS) V-15 TYPE III SERIES	V-15 Type III	4-5	26	38	35	26	1 Gram	¾ to 1¼	 5 microns x 18 microns (.0002" x .0007") Biradial Elliptical	Standard Mount with Snap-Down Stylus Guard
	V-15 III-G	4-5	26	38	35	26	1 Gram	¾ to 1¼	 15 microns (.0006") Spherical	Standard Mount with Snap-Down Stylus Guard
DELUXE HIGH TRACK-ABILITY SERIES	M95ED	6	24	33	28	19	1 Gram	¾ to 1½	 5 microns x 18 microns (.0002" x .0007") Biradial Elliptical	Standard Mount with Snap-Down Stylus Guard
	M91ED	7	22	33	28	19	1 Gram	¾ to 1½	 5 microns x 18 microns (.0002" x .0007") Biradial Elliptical	Standard Mount
	M91GD	7	22	33	28	19	1 Gram	¾ to 1½	 15 microns (.0006") Spherical	Standard Mount
	M75ED Type 2	7	22	33	28	19	1 Gram	¾ to 1½	 5 microns x 18 microns (.0002" x .0007") Biradial Elliptical	Standard Mount with Snap-Down Stylus Guard
CUSTOM HIGH TRACK-ABILITY SERIES	M95EJ	6	28	35	30	20	2 Grams	1½ to 3	 10 microns x 18 microns (.0004" x .0007") Biradial Elliptical	Standard Mount with Snap-Down Stylus Guard
	M91E	8	20	28	25	18	1 Gram	¾ to 1½	 5 microns x 18 microns (.0002" x .0007") Biradial Elliptical	Snap-In Easy-Mount
	M75G Type 2	8	20	28	25	18	1 Gram	¾ to 1½	 15 microns (.0006") Spherical	Standard Mount with Snap-Down Stylus Guard
	M75EJ Type 2	8	28	35	30	20	2 Grams	1½ to 3	 10 microns x 18 microns (.0004" x .0007") Biradial Elliptical	Standard Mount with Snap-Down Stylus Guard
	M75B Type 2 (Formerly M75-6 Type 2)	8	28	35	30	20	2 Grams	1½ to 3	 15 microns (.0006") Spherical	Standard Mount with Snap-Down Stylus Guard
EXTRA DURABILITY HIGH-TRACK SERIES	M93E	9	18	25	24	14	2 Grams	1½ to 3	 10 microns x 18 microns (.0004" x .0007") Biradial Elliptical	Snap-In Easy-Mount
	M75-6S	9	18	25	24	14	2 Grams	1½ to 3	 15 microns (.0006") Spherical	Snap-In Easy-Mount
	M75ECS	9	25	35	20	14	3 Grams	2 to 4	 10 microns x 18 microns (.0004" x .0007") Biradial Elliptical	Snap-In Easy-Mount
	M75CS	9	25	39	25	15	4 Grams	3 to 5	 15 microns (.0006") Spherical	Snap-In Easy-Mount

THE SHURE CARTRIDGES LISTED ABOVE ARE COMPATIBLE WITH ALL FOUR-CHANNEL MATRIX SYSTEMS

Several matrix (or mixing) systems have been devised that permit four channels of program material to be recorded and reproduced on phonograph records. Although these systems differ in detail, they all require careful matching and control of pickup response to obtain optimum separation into four channels in playback.

The same performance parameters that apply to conventional stereo—especially *trackability*—also apply to four-

channel systems, and because mistracking is one of the most noticeable types of distortion in four-channel playback systems, Shure recommends the use of the highest trackability cartridge compatible with your playback equipment for four-channel use. The use of cartridges with poor trackability can upset the balance of four-channel systems causing spurious unwanted signals, resulting in less-than-satisfactory performance.

STANDARD STEREO DYNETIC SERIES	M55E	10	These cartridges were designed prior to the development of trackability measurement techniques. They are intended for economy systems; however, the trackability of these cartridges is good, and will generally exceed the trackability potential of the associated equipment with which they are used.	¾ to 2	 5 microns x 18 microns (.0002" x .0007") Biradial Elliptical	Standard Mount
	M44E	10		1¾ to 4	 10 microns x 18 microns (.0004" x .0007") Biradial Elliptical	Standard Mount
	M44G	10		¾ to 1½	 15 microns (.0006") Spherical	Standard Mount
	M44-7	10		1½ to 3	 18 microns (.0007") Spherical	Standard Mount
	M44C	10		3 to 5	 18 microns (.0007") Spherical	Standard Mount
	M7/N21D	10		1½ to 2½	 18 microns (.0007") Spherical	Standard Mount
	M3D	10		3 to 6	 18 microns (.0007") Spherical	Standard Mount

ANYTHING II COULD DO III CAN DO BETTER!

the V-15 Type III ... a singular achievement in phono cartridge design

The remarkable Shure V-15 Type III Phono Cartridge was designed for the connoisseur's high fidelity system. It clearly defines the outer limits of the state of the art of phono cartridge design, and is indeed the worthy successor to the world-acclaimed Shure V-15 Type II Improved.

Among its brilliant innovations is an all-new laminated magnetic core structure, and an exquisitely designed stylus assembly with 25% reduction of effective mass.

Result: (1) Higher-than-ever trackability at the ultra-light tracking forces of the 1970's; (2) an astonishingly flat frequency response with no noticeable emphasis or de-emphasis at any frequency; (3) an extended dynamic range even beyond that of our V-15 Type II Improved; and (4) all this without a reduction in output level.

We call the Type III the Synergistic Cartridge because it maintains all performance factors in perfect equilibrium to produce a total audio effect that is greater than the sum of its individual improvements would indicate.

All in all, the V-15 Type III offers you an extraordinary listening experience.

Note: For a collection of critics' test reports published in high fidelity, electronics and audio publications throughout the world, write for the Shure Compendium of Critical Reviews (Ask for Booklet AL482).



SUPER-TRACK "PLUS" CARTRIDGES

For ¾ to 1¼ Grams Tracking




V-15 TYPE III SUPER-TRACK "PLUS" PHONO CARTRIDGE

THE SOUND OF THE V-15 TYPE III

The sound of the V-15 Type III, paradoxically, is due in no small part to an absence of a sound of its own. In no way does it interpose itself upon the music. Thus, the resultant sound of the Type III is not "sweet," "mellow," or "brilliant" . . . it is the sound of the recording itself! Its truly flat, unaccented frequency response and extended dynamic range mean a hearable difference in all your recordings, old and new.

In extended listening, the uncolored neutral timbre and tonality of the Type III results in a remarkable listening experience in which complex melodic lines from every conceivable kind of music — from baroque to rock — utilizing a wide variety of recording techniques and playback equipment, are delineated with startling and hitherto unheard clarity.


ABSOLUTE UNIFORMITY OF PERFORMANCE

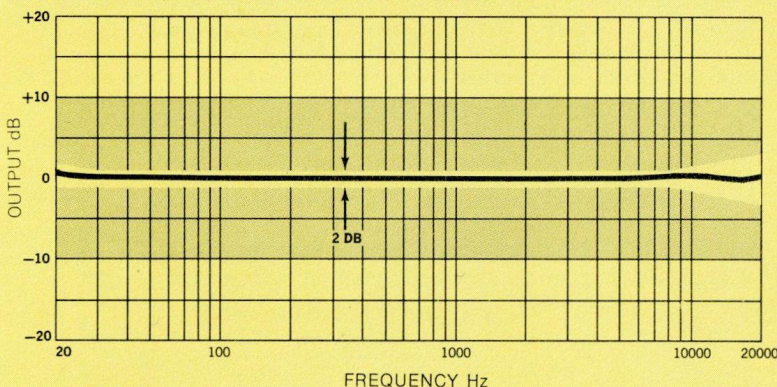

Shown above is a graphic representation of the audible spectrum, which illustrates the uniformly flat response you will achieve with your V-15 Type III cartridge. Under the Shure Quality Control Program, every Type III cartridge, whether it is purchased now or next year, in Chicago, London, Hong Kong, or Sydney, must produce a flat response curve that fits within the extraordinarily narrow limits of the Type III response "output envelope" (the unshaded area above) before shipment! The curve shown was made by a typical Type III, mounted in an SME tone arm, and tracking the STR100 test record, response corrected for 6 dB/octave below 500 Hz.

EXTRAORDINARY TRACKABILITY

Its exceptional trackability enables you to use ultra-light tracking forces that will significantly increase the life of recordings and stylus tip. Further, it enables you to use the most advanced light-tracking tone arms and precision turntables available, and to use the newer, even more sophisticated turntables and arms now under development.

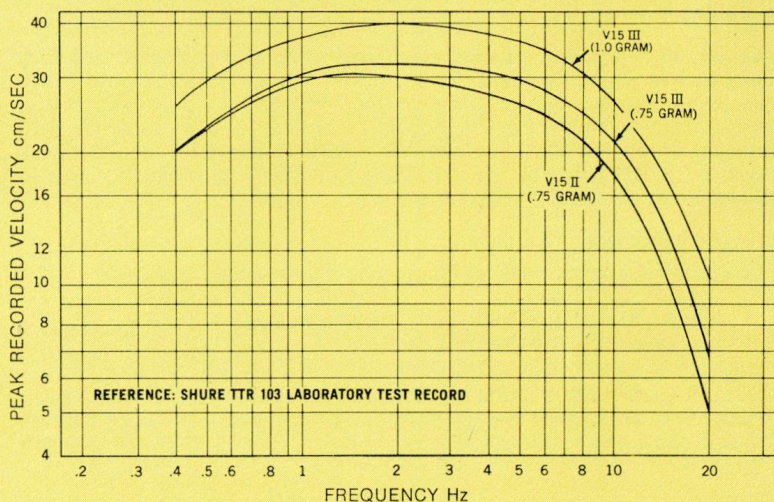

The trackability chart above shows the unmistakable superiority of the V-15 Type III in the single most important measure of overall cartridge performance: trackability. These curves were produced by Shure V-15 cartridges tracking in a Shure SME tone arm. The Type III effortlessly tracks the highest velocity levels of modern recordings.

V-15 TYPE III and V-15 III-G SPECIFICATIONS

Typical Trackability (at 1 gram in Shure-SME Tone Arm). Reference: Shure TTR 103 Laboratory Test Record.

400 Hz — 26 CM/SEC	5000 Hz — 35 CM/SEC
1000 Hz — 38 CM/SEC	10,000 Hz — 26 CM/SEC

Frequency Response (using Optimum Load): 10 to 25,000 Hz

Output Voltage: 3.5 mV per channel at 1000 Hz, 5 CM/SEC peak recorded velocity. Output from each channel within 2 dB.

Channel Separation: Minimum 25 dB at 1000 Hz
Minimum 15 dB at 10,000 Hz

Tracking Force Range: ¾ to 1¼ grams.

Optimum Load: 47,000 ohms resistance in parallel with 400 to 500 picofarads total capacitance per channel. Load resistance can be up to 70,000 ohms with almost no audible change in frequency response. Total capacitance includes both the tone arm wiring and amplifier input circuit. (Most amplifiers and tone arms meet this requirement.)

Inductance: 500 millihenries nominal

D.C. Resistance: 1350 ohms nominal

Output Terminals: 4 terminals

V-15 Type III Styli Available:

VN35E Biradial Elliptical Stylus (as supplied in V-15 Type III Cartridge) Diamond Tip

18 microns (.0007 inch) frontal radius

5 microns (.0002 inch) side contact radii

25 microns (.0010 inch) between record contact points

VN3-G Spherical Stylus, (as supplied in V-15 III-G Cartridge) Diamond Tip [15 microns (.0006 inch) radius]

VN78E Biradial Elliptical Stylus, Diamond Tip for monophonic 78 rpm records.

Tracking Force Range: 1½ to 3 grams

63 microns (.0025 inch) frontal radius

13 microns (.0005 inch) side contact radii

89 microns (.0035 inch) between record contact points.

NOTE: A small .8 gram weight on the molded grip of the VN78E Stylus Assembly allows it to be substituted for a VN35E or VN3-G. This .8 gram weight achieves the proper tracking force for 78 rpm records *automatically* and normally requires no manual adjustment of the tone arm's tracking force setting.

Mounting: Standard 12.7 mm (½ inch) mounting centers.

Weight: Net Weight— 6 grams

MODEL V-15 Type III Super-Track cartridge

MODEL V-15 III-G Super-Track cartridge with .0006" Spherical stylus

MODEL V-15 III-GZ Super-Track cartridge pre-mounted for GARRARD Zero automatic turntables tracking from ¾ to 1¼ grams (Biradial Elliptical Stylus)

MODEL VN35E Biradial Elliptical stylus fits V-15 Type III and V-15 III-G cartridges

MODEL VN3-G, 15 microns (.0006 inch) Spherical stylus fits V-15 Type III and V-15 III-G cartridges

MODEL VN78E Biradial Elliptical stylus designed for monophonic 78 rpm recordings. Fits V-15 Type III and V-15 III-G cartridges

**DELUXE
SERIES
OF
HIGH
TRACKABILITY
CARTRIDGES**


THE NEW "NUMBER 2"!

BY ANY MEASURE OF PERFORMANCE...THE CARTRIDGE SECOND
ONLY TO THE SHURE V-15 TYPE III

For ¾ to 1½ Grams Tracking



M95ED Deluxe high trackability cartridge with built-in snap-down stylus guard and biradial elliptical stylus



Second only to one! The Shure M95ED combines several of the high-performance design features of the Shure V-15 Type III with a radically new internal electromagnetic structure to deliver exceptional trackability and total performance surpassed only by the Type III.

The M95ED incorporates a new, thinner, uninterrupted pole piece developed by Shure design engineers to optimize electromagnetic characteristics—especially at higher frequencies. As a result, magnetic losses have been minimized, and frequency response remains essentially flat across the entire frequency range. Dynamic range is significantly extended.

With its nude-mounted, biradial elliptical stylus tip, the M95ED has very low effective stylus tip mass. This provides higher trackability to maintain perfect groove contact through the "hottest," most heavily modulated passages encountered on modern recordings—all at extremely light tracking forces that cut record wear and increase stylus tip life. Its exceptional trackability makes the M95ED an outstanding choice for use in four-channel encoded (matrix) systems.

M95ED SPECIFICATIONS. . .

Trackability at 1 gram tracking force using a Shure/SME Arm:


24 CM/SEC at 400 Hz	28 CM/SEC at 5,000 Hz
33 CM/SEC at 1,000 Hz	19 CM/SEC at 10,000 Hz

Tracking Force: ¾ to 1½ grams

Frequency Response: 20 to 20,000 Hz

Optimum Load: 47,000 ohms resistance in parallel with 400 to 500 picofarads total capacitance per channel. Load resistance can be as high as 100,000 ohms and total capacitance can be as low as 100 picofarads with

TRACKABILITY CHART
(at 1 Gram)

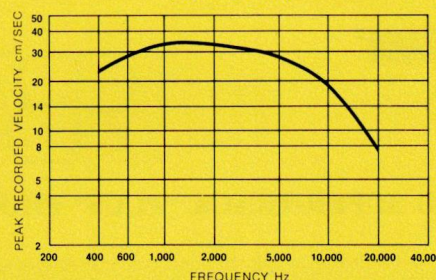

only minor audible change. Total capacitance includes the capacitances of the tone arm wiring, phono cables, and the amplifier input circuit. (Most amplifiers and tone arms meet this requirement.)

Output Voltage: 4.7 mV per channel at 1,000 Hz at 5 CM/SEC peak velocity

Channel Separation: Minimum 25 dB at 1,000 Hz

Channel Balance: Output from each channel within 2 dB

Stylus: N95ED Biradial elliptical with nude diamond tip

17.8 microns (.0007 inch) frontal radius

5 microns (.0002 inch) side contact radii

25 microns (.0010 inch) wide between record contact points

Stylus: N95-3 Spherical for monophonic 78 rpm recordings—63 microns (.0025 inch) stylus tip radius

Inductance: 650 millihenries

D. C. Resistance: 1550 ohms

Weight: 6 grams

Mounting: Standard 12.7mm (½ inch) mounting centers

MODEL M95ED Deluxe Hi-Track Cartridge with Biradial Elliptical stylus

MODEL N95ED Biradial Elliptical replacement stylus

MODEL N95-3 Spherical stylus designed for monophonic 78 rpm recordings



M95EJ Custom high trackability cartridge with built-in-snap-down stylus guard and biradial elliptical stylus



Designed specifically for owners of heavier tracking (1½ to 3 grams) turntables and tone arms who want optimum cartridge performance. The M95EJ uses the same newly developed pole piece of the M95ED (above) and delivers a frequency response virtually identical in its flatness—but at slightly greater tracking forces.

The M95EJ uses a biradial elliptical stylus tip, and delivers excellent trackability. It is the ideal cartridge choice for audiophiles who want to upgrade their record playback systems at moderate cost.

M95EJ SPECIFICATIONS

Trackability at 2 grams tracking force using a Shure/SME Arm:


28 CM/SEC at 400 Hz	30 CM/SEC at 5,000 Hz
35 CM/SEC at 1,000 Hz	20 CM/SEC at 10,000 Hz

Tracking Force: 1½ to 3 grams

Frequency Response: 20 to 20,000 Hz

Optimum Load: 47,000 ohms resistance in parallel with 400 to 500 picofarads total capacitance per channel. Load resistance can be up to 100,000 ohms and total capacitance can be as low as 100 picofarads with only minor audible change. Total capacitance includes the capacitances of the tone arm wiring, phono cables, and the amplifier input circuit. (Most amplifiers and tone arms meet this requirement.)

TRACKABILITY CHART
(at 2 Grams)

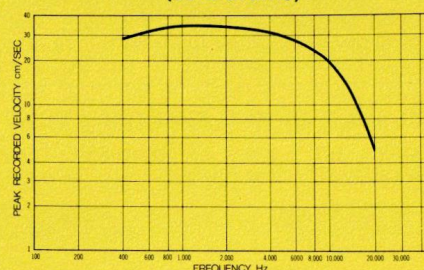

Output Voltage: 4.7 mV per channel at 1,000 Hz at 5 CM/SEC peak velocity

Channel Separation: Minimum 20 dB at 1,000 Hz

Channel Balance: Output from each channel within 2 dB

Stylus: N95EJ Biradial elliptical with nude diamond tip

17.8 microns (.0007 inch) frontal radius

10 microns (.0004 inch) side contact radii

25 microns (.0010 inch) wide between record contact points

Stylus: N95-3 Spherical for monaural 78 rpm recordings—63 microns (.0025 inch) stylus tip radius

Inductance: 650 millihenries

D. C. Resistance: 1550 ohms

Weight: 6 grams

Mounting: Standard 12.7mm (½ inch) mounting centers

MODEL M95EJ Custom Hi-Track Cartridge with Biradial Elliptical stylus

MODEL N95EJ Biradial Elliptical replacement stylus


MODEL N95-3 Spherical stylus designed for monophonic 78 rpm recordings

**DELUXE
SERIES
OF
HIGH
TRACKABILITY
CARTRIDGES**

For ¾ to 1½ Grams Tracking



**M91ED Elliptical Stylus
M91GD Spherical Stylus
Deluxe high trackability
cartridges**



Optimized design parameters in the stylus assembly give these Deluxe Series cartridges superb high frequency trackability, and overall performance previously unavailable at this price level. The ultra-light diamond stylus tip on these cartridges is nude-mounted directly on the stylus bar, reducing effective stylus tip mass and heightening its excellent tracking characteristics. The very high trackability levels reached by these cartridges makes them suitable choices for use in four-channel encoded (matrix) playback systems.

The M91ED, M91GD and M75ED Type 2 have identical performance characteristics. The M75ED Type 2 is offered for those who prefer a built-in snap-down stylus guard. The M91GD is offered for those who prefer a spherical stylus.

M91ED, M91GD and M75ED Type 2 SPECIFICATIONS



Trackability at 1 gram tracking force using a Shure/SME Arm:

22 CM/SEC at 400 Hz	28 CM/SEC at 5,000 Hz
33 CM/SEC at 1,000 Hz	19 CM/SEC at 10,000 Hz

Tracking Force: ¾ to 1½ grams

Frequency Response: From 20 to 20,000 Hz

TRACKABILITY CHART
(at 1 Gram)

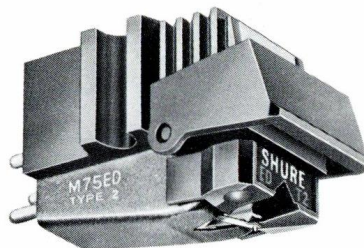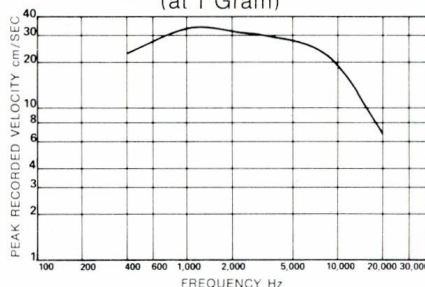

**M75ED Type 2
Elliptical Stylus with
Built-in snap-down stylus guard**

Optimum Load: 47,000 ohms resistance in parallel with 400 to 500 picofarads total capacitance per channel. Load resistance can be up to 70,000 ohms with almost no audible change in frequency response. Total capacitance includes both the tone arm wiring and amplifier input circuit. (Most amplifiers and tone arms meet this requirement.)

Output Voltage: 5.0 mv per channel at 1,000 Hz at 5 CM/SEC peak velocity

Channel Separation: Minimum 25 dB at 1,000 Hz

Channel Balance: Output from each channel within 2 dB

Stylus: M91ED and N91ED Type 2 Biradial Elliptical with nude diamond tip

17.8 microns (.0007 inch) frontal radius

5 microns (.0002 inch) side contact radii

25 microns (.0010 inch) wide between record contact points

Stylus: N91GD Spherical—15 microns (.0006 inch) radius with nude diamond tip

Inductance: 720 millihenries

D.C. Resistance: 630 ohms

Weight: 6 grams

Mounting: Standard 12.7 mm (½ inch) mounting centers

MODEL M91ED Deluxe Hi-Track Cartridge with Biradial Elliptical stylus

MODEL N91ED Biradial Elliptical replacement stylus

NOTE: Owners of M91E or M92E cartridges may upgrade their present systems by using an N91ED stylus.

MODEL M91GD Deluxe Hi-Track Cartridge with Spherical stylus


MODEL N91GD Spherical replacement stylus

MODEL M75ED Type 2 Deluxe Hi-Track Cartridge with Biradial Elliptical stylus

MODEL N75ED Type 2 Biradial Elliptical replacement stylus

NOTE: To play 78 rpm records with the M91ED or M91GD cartridges, use a Model N91-3 63 microns (.0025 inch) spherical stylus. To play 78 rpm records with an M75ED Type 2 cartridge, use a Model N75-3 63 microns (.0025 inch) spherical stylus.

PRE-MOUNTED DELUXE M91ED HIGH TRACKABILITY CARTRIDGES

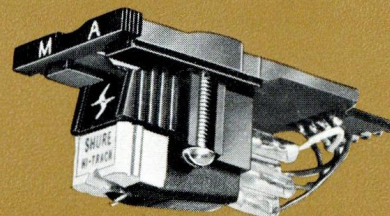

**For Miracord
Turntables**

Model M91ED-BJ Pre-mounted M91ED cartridge fits Elac/Miracord automatic turntables tracking from ¾ to 1½ grams

**For Garrard
Zero 100 Turntables**

Model M91ED-GZ Pre-mounted M91ED cartridge fits Garrard Zero 100 turntables

**For Perpetuum Ebner
Turntables**

Model M91ED-PT Pre-mounted M91ED cartridge fits Perpetuum Ebner PE 3060T automatic turntable

PRE-MOUNTED CARTRIDGE REPLACEMENT STYLUS

MODEL N91ED Biradial Elliptical replacement stylus.


Fits all M91ED pre-mounted cartridges

CUSTOM SERIES OF HIGH TRACKABILITY CARTRIDGES



About the Custom Hi-Track Series

The trackability charts for the cartridges on this page tell you that these cartridges deliver high trackability at whisper-weight tracking forces—yet they are relatively modest in cost. Each also features a retractile stylus to prevent record damage, and are available in both Bi-radial Elliptical and Spherical stylus configurations. Manufactured and tested under the critical Shure quality control program.


For ¾ to 1½ Grams Tracking



M91E Elliptical Stylus Easy-Mount Design

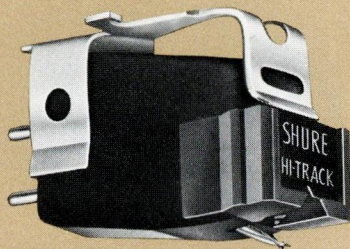


M75G Type 2 Spherical Stylus with Built-in Snap-down Stylus Guard

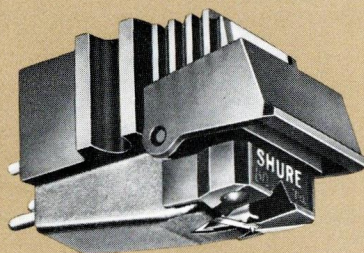

Excellent trackability in the ¾ to 1½ gram range. Designed for use in high quality manual and automatic turntables. The M91E is available in standard cartridge configuration, or pre-mounted in tone arm head for instant installation in Garrard, Miracord or Dual turntables. The M91E and M75G Type 2 have identical trackability characteristics. The M75G Type 2 is offered for those who prefer a spherical stylus.

TRACKABILITY CHART
(at 1 Gram)

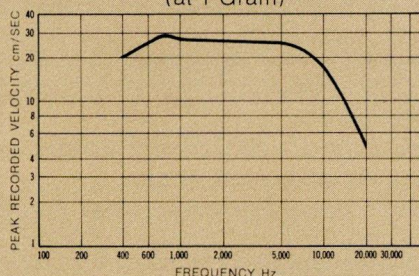

M91E and M75G Type 2 SPECIFICATIONS

Trackability at 1 gram tracking force using a Shure/SME Arm:
20 CM/SEC at 400 Hz 25 CM/SEC at 5,000 Hz
28 CM/SEC at 1,000 Hz 18 CM/SEC at 10

Tracking Force: ¾ to 1½ grams

Frequency Response: From 20 to 20,000 Hz

Optimum Load: 47,000 ohms resistance in parallel with 400 to 500 picofarads total capacitance per channel. Load resistance can be up to 70,000 ohms with almost no audible change in frequency response. Total capacitance includes both the tone arm wiring and amplifier input circuit. (Most amplifiers and tone arms meet this requirement.)

Output Voltage: 5.0 mv per channel at 1,000 Hz at 5 CM/SEC peak velocity

Channel Separation: Minimum 25 dB at 1,000 Hz

Channel Balance: Output from each channel within 2 dB

Stylus: N91E Biradial elliptical with nude diamond tip

17.8 microns (.0007 inch) frontal radius

5 microns (.0002 inch) side contact radii

.25 microns (.0010 inch) wide between record contact points

Stylus: N75G Type 2 Spherical, 15 microns (.0006 inch) radius

Inductance: 720 millihenries

D.C. Resistance: 630 ohms

Weight: 6 grams

Mounting: Standard 12.7 mm (½ inch) mounting centers

NOTE: To play 78 rpm records with any M91 Series cartridge use an N91-3 63 microns (.0025 inch) spherical stylus. To play 78 rpm records with any M75 Series cartridge use an N75-3, 63 microns (.0025 inch) spherical stylus.

MODEL M91E Custom Hi-Track Cartridge with Biradial Elliptical stylus

MODEL N91E Biradial Elliptical replacement stylus

MODEL M75G Type 2 Custom Hi-Track Cartridge with Spherical stylus


MODEL N75G Type 2 Spherical replacement stylus

PRE-MOUNTED CARTRIDGES

MODEL M91E-GSL Pre-mounted M91E Cartridge fits Garrard SL95B and SL72B automatic turntables

MODEL M91E-50H Pre-mounted M91E Cartridge fits Elac/Miracord automatic turntables tracking from ¾ to 1½ grams


For 1½ to 3 Grams Tracking



M75B Type 2 Spherical Stylus with Built-in Snap-down Stylus Guard




M75EJ Type 2 Elliptical Stylus with Built-in Snap-down Stylus Guard

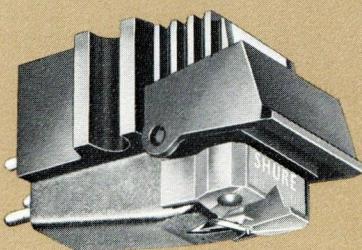

The Shure M75EJ Type 2 and M75B Type 2 cartridges deliver excellent trackability at moderate tracking forces between 1½ and 3 grams, making them ideal choices for moderately priced systems and for upgrading older systems. Trackability measurements (see chart) show that these cartridges track even heavily modulated recordings at velocities that are well above theoretical cutting limits of modern recordings. Choice of Biradial Elliptical or Spherical styli. Both cartridges feature a built-in snap-down stylus guard. The M75EJ Type 2 and M75B Type 2 have identical trackability characteristics. The M75B Type 2 is offered for those who prefer a spherical stylus.

TRACKABILITY CHART
(at 2 Grams)

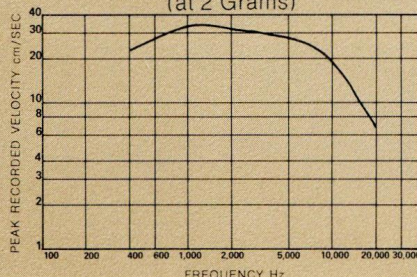

M75EJ Type 2 and M75B Type 2 SPECIFICATIONS

Trackability at 2 grams tracking force using a Shure/SME Arm:

28 CM/SEC at 400 Hz 30 CM/SEC at 5,000 Hz
35 CM/SEC at 1,000 Hz 20 CM/SEC at 10,000 Hz

Tracking Force: 1½ to 3 grams

Frequency Response: From 20 to 20,000 Hz

Optimum Load: 47,000 ohms resistance in parallel with 400 to 500 picofarads total capacitance per channel. Load resistance can be up to 70,000 ohms with almost no audible change in frequency response. Total capacitance includes both the tone arm wiring and amplifier input circuit. (Most amplifiers and tone arms meet this requirement.)

Output Voltage: 5.0 mV per channel at 1,000 Hz at 5 CM/SEC peak velocity

Channel Separation: Minimum 20 dB at 1,000 Hz

Channel Balance: Output from each channel within 2 dB

Stylus: N75EJ Type 2 Biradial Elliptical with diamond tip

17.8 microns (.0007 inch) frontal radius

10 microns (.0004 inch) side contact radii

25 microns (.0010 inch) wide between record contact points

Stylus: N75B Type 2 Spherical 15 microns (.0006 inch) radius

Inductance: 720 millihenries

D.C. Resistance: 630 ohms

Weight: 6 grams

Mounting: Standard 12.7 mm (½ inch) mounting centers

MODEL M75EJ Type 2 Custom Hi-Track Cartridge with Biradial Elliptical stylus

MODEL N75EJ Type 2 Biradial Elliptical replacement stylus

MODEL M75B Type 2 Custom Hi-Track Cartridge with Spherical stylus

MODEL N75B Type 2 Spherical replacement stylus

NOTE: To play 78 rpm records with the M75G Type 2, M75EJ Type 2 or M75B Type 2, use an N75-3 63 microns (.0025 inch) spherical stylus.


**EXTRA
DURABILITY
HIGH
TRACKABILITY
CARTRIDGES**

Economy priced, but fine performance when used in moderately priced record changers. Extra durable stylus assemblies for heavy use by the whole family. These cartridges are well suited for institutional (school) and broadcast applications where durability is a performance consideration.


For 1½ to 5 Grams Tracking



**M93E Elliptical Stylus
Hi-Track Cartridge**




**M75-6S, M75ECS and
M75CS Hi-Track
Cartridges**

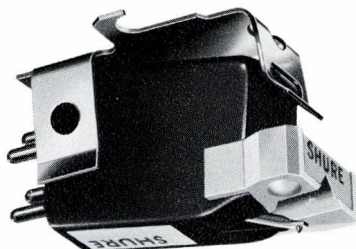

This high performance series of cartridges was designed to give heavy duty performance at moderate prices in all modern turntables and tone arms. Four High Trackability Cartridges in a choice of tracking force ranges from 1½ to 5 grams—and all feature “snap-in” design for fast, effortless installation.

CARTRIDGE MODEL	STYLUS CONFIGURATION	TRACKING FORCE	REPLACEMENT STYLUS
M93E	10 microns x 18 microns (.0004" x .0007") Biradial Elliptical	1½-3	N93E
M75-6S	15 microns (.0006") Spherical	1½-3	N75-6
M75ECS	10 microns x 18 microns (.0004" x .0007") Biradial Elliptical	2-4	N75EC
M75CS	15 microns (.0006") Spherical	3-5	N75C

**TRACKABILITY CHART for M93E and M75-6S
(at 2 Grams)**

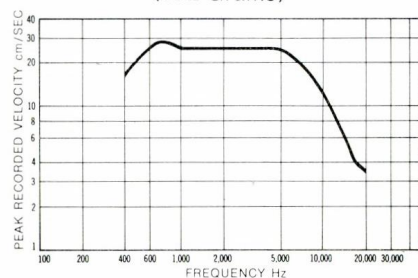

Trackability using a Shure/SME Arm:


- M93E and M75-6S at 2 grams tracking force:
18 CM/SEC at 400 Hz 24 CM/SEC at 5,000 Hz
25 CM/SEC at 1,000 Hz 14 CM/SEC at 10,000 Hz
- M75CS at 4 grams tracking force:
25 CM/SEC at 400 Hz 25 CM/SEC at 5,000 Hz
39 CM/SEC at 1,000 Hz 15 CM/SEC at 10,000 Hz
- M75ECS at 3 grams tracking force:
25 CM/SEC at 400 Hz 20 CM/SEC at 5,000 Hz
35 CM/SEC at 1,000 Hz 14 CM/SEC at 10,000 Hz

Frequency Response: From 20 to 20,000 Hz


Output Voltage: M93E and M75-6S, 6.2 mV per channel at 1,000 Hz at 5 CM/SEC; M75CS and M75ECS, 9.3 mV per channel at 1,000 Hz at 5 CM/SEC

Channel Separation: Minimum 20 dB at 1,000 Hz

**TRACKABILITY CHART for M75CS
(at 4 grams)**

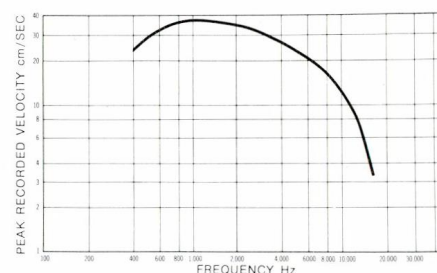

**TRACKABILITY CHART for M75ECS
(at 3 grams)**

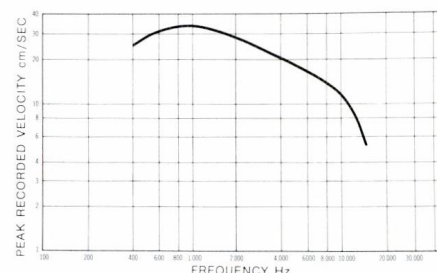

Channel Balance: Output from both channels within 2 dB.

Stylus: N93E Biradial Elliptical with diamond tip, 1½ to 3 grams tracking force

18 microns (.0007 inch) frontal radius

10 microns (.0004 inch) side contact radii

25 microns (.0010 inch) wide between record contact points

N75EC Biradial elliptical with diamond tip, 2-4 grams tracking force

18 microns (.0007 inch) frontal radius

10 microns (.0004 inch) side contact radii

25 microns (.0010 inch) wide between record contact points

N75-6 Spherical 15 microns (.0006 inch) radius with diamond tip, 1½ to 3 grams tracking force

N75C Spherical 15 microns (.0006 inch) radius with diamond tip, 3 to 5 grams tracking force

Optimum Load: 47,000 ohms resistance in parallel with 400 to 500 picofarads total capacitance per channel. Load resistance can be up to 70,000 ohms with almost no audible change in frequency response. Total capacitance includes both the tone arm wiring and amplifier input circuit. (Most amplifiers and tone arms meet this requirement.)

Inductance: 720 millihenries

D.C. Resistance: 630 ohms

Weight: 6 grams

Mounting: Snap-in type; standard 12.7 mm (½ inch) mounting centers on retaining clip

MODEL M93E Hi-Track Cartridge with Biradial Elliptical stylus

MODEL N93E Biradial Elliptical replacement stylus

MODEL M75-6S Hi-Track Cartridge with Spherical stylus

MODEL N75-6 Spherical replacement stylus

MODEL M75ECS Hi-Track Cartridge with Biradial Elliptical stylus


MODEL N75EC Biradial Elliptical replacement stylus

MODEL M75CS Hi-Track Cartridge with Spherical stylus


MODEL N75C Spherical replacement stylus

NOTE: To play 78 rpm records with the M93E, use an N91-3, 63 microns (.0025 inch) spherical stylus. Use an N75-3, 63 microns (.0025 inch) spherical stylus to play 78 rpm records with the M75-6S, M75ECS or M75CS

STANDARD SERIES OF STEREO DYNETIC CARTRIDGES



M55E For ¾ to 2 Grams Tracking




A popular cartridge that gives professional performance within a moderate budget. Incorporates Biradial elliptical stylus. Note the wide variety of features and impressive specifications:

SPECIFICATIONS


Tracking Force: ¾ to 2 grams
Frequency Response: From 20 to 20,000 Hz
Output Voltage: 6.2 millivolts per channel at 1,000 Hz at 5 CM/SEC
Channel Separation: Minimum 20 dB at 1,000 Hz
Channel Balance: Output from each channel within 2 dB
Trackability at 1 gram Tracking Force: 12 CM/SEC at 400 Hz
Effective Stylus Tip Mass: 1.2 milligrams
Stylus N55E: Biradial elliptical shaped diamond tip
18 microns (.0007 inch) frontal radius
5 microns (.0002 inch) side contact radii
25 microns (.0010 inch) wide between record contact points
Optimum Load: 47,000 ohms resistance in parallel with 400 to 500 picofarads total capacitance per channel. Load resistance can be up to 70,000 ohms with almost no audible change in frequency response. Total capacitance includes both the tone arm wiring and amplifier input circuit.
Inductance: 720 millihenries
D.C. Resistance: 630 ohms
Weight: 6 grams
Mounting: Standard 12.7 mm (½") mounting centers
MODEL M55E Cartridge
MODEL N55E Stylus

NOTE: To play 78 RPM records with any of the M44 Series or M55E cartridges, use Model N44-3, 63 microns (.0025 inch) radius, spherical tip stylus.

SPHERICAL STYLUS CARTRIDGES





M44 Series Combines Quality and Economy



Three cartridges in the \$18.00 to \$20.00 price range to fill the needs of the hi-fi hobbyist who wants the most for his money in this price range. All have received ample critical acclaim as the best in their price class. Note: All M44 series styli are interchangeable.

SPECIFICATIONS



Frequency Response: From 20 to 20,000 Hz
Output Voltage: At 1,000 Hz at 5 CM/SEC
Model M44G, 6.2 millivolts per channel
Model M44-7, 9.5 millivolts per channel
Model M44C, 9.5 millivolts per channel
Channel Separation: Minimum 25 dB at 1,000 Hz



M3D All-time Best Seller

Where cost is the dominant factor, the M3D provides extremely musical and transparent sound at a rock-bottom price. The original famous Shure Stereo Dynetic Cartridge . . . with almost universal application. Tracks at forces from 3 to 6 grams. For any changer.

MODEL M3D Cartridge
MODEL N3D Stylus



M44E For Heavier Tracking Forces 1¾ to 4 Grams

All the advantages of a Biradial elliptical stylus for older turntables that track at heavier forces. Good performance at a moderate cost.

SPECIFICATIONS

Tracking Force: 1¾ to 4 grams
Frequency Response: From 20 to 20,000 Hz
Output Voltage: 9.5 millivolts per channel at 1,000 Hz at 5 CM/SEC
Channel Separation: Minimum 20 dB at 1,000 Hz
Trackability at 1¾ gram Tracking Force: 15 CM/SEC at 400 Hz
Effective Stylus Tip Mass: 1.2 milligrams
Stylus N44E: Biradial elliptical shaped diamond tip
18 microns (.0007 inch) frontal radius
10 microns (.0004 inch) side contact radii
25 microns (.0010 inch) wide between record contact points
Optimum Load: 47,000 ohms resistance in parallel with 400 to 500 picofarads total capacitance per channel. Load resistance can be up to 70,000 ohms with almost no audible change in frequency response. Total capacitance includes both the tone arm wiring and amplifier input circuit. (Most amplifiers and tone arms meet this requirement.)
Inductance: 720 millihenries
D.C. Resistance: 630 ohms
Weight: 7 grams
Mounting: Standard 12.7 mm (½") mounting centers
MODEL M44E Cartridge
MODEL N44E Stylus

Optimum Load: 47,000 ohms resistance in parallel with 400 to 500 picofarads total capacitance per channel. Load resistance can be up to 70,000 ohms with almost no audible change in frequency response. Total capacitance includes both the tone arm wiring and amplifier input circuit. (Most amplifiers and tone arms meet this requirement.)

Inductance: 720 millihenries
D.C. Resistance: 630 ohms
Weight: 7 grams
Mounting: Standard 12.7 mm (½") mounting centers

For Light Tracking ¾ to 1½ Grams

MODEL M44G Cartridge. With 15 microns (.0006 inch) radius spherical diamond stylus

MODEL N44G Stylus. 15 microns (.0006 inch) radius spherical diamond

For Heavier Tracking 1½ to 3 Grams



MODEL M44-7 Cartridge. With 18 microns (.0007 inch) radius spherical diamond stylus

MODEL N44-7 Stylus. 18 microns (.0007 inch) radius spherical diamond

For Heaviest Tracking 3 to 5 Grams

MODEL M44C Cartridge. With 18 microns (.0007 inch) radius spherical diamond stylus

MODEL N44C Stylus. 18 microns (.0007 inch) radius spherical diamond stylus




M7/N21D Musical Best Buy

Top-rated cartridge featuring the highly compliant N21D tubular stylus. Because of unusually clean mid-range (where most music really "happens") it is especially recommended if your present system sounds "muddy." For 2-gram optimum tracking (not to be used over 2½ grams).

MODEL M7/N21D Cartridge
MODEL N21D Stylus

(Also, if you own an M3D or M7D, you can upgrade it for higher compliance, if tracking force does not exceed 2½ grams, with the N21D stylus.)

TONE ARM PREAMP STYLUS GAUGE

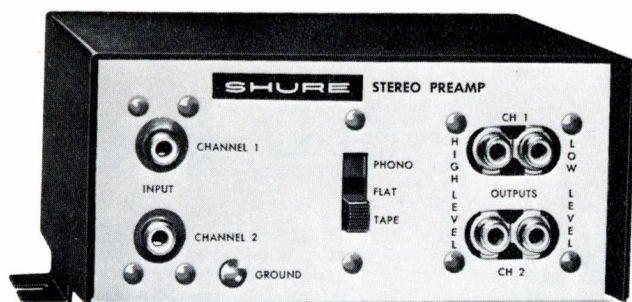

M64 and M64-2E Universal Stereo Amplifier

For Phonographs, Tape Decks, Microphones

- Converts phonos to accept magnetic cartridges
- Equalizes and amplifies tape decks
- Boosts microphone output
- Ideal as a broadcast phono preamplifier

The Model M64 is a low-cost, versatile, compact, low noise and low distortion stereo preamplifier that provides gain, equalization, and choice of impedances and levels to solve an unusually broad variety of preamplification and equalization problems. Silicon transistor circuitry, easy permanent-mount installation.

SPECIFICATIONS

Frequency Response:

Flat — ± 2 db from 20 Hz to 20 KHz

Phono — ± 2 db from 40 Hz to 15 KHz (Standard RIAA Curve)

Tape — ± 2 db from 50 Hz to 15 KHz (7½ IPS NAB Curve)

Distortion: Under 1% total harmonic distortion for an output of 2 volts at 1 KHz in phono, flat and tape positions

Channel Separation: Minimum 50 dB at 1 KHz


Channel Balance: Channels matched to within 2 dB at 1 KHz

Dimensions: 59 mm (2¼") High x 142 mm (5½") wide x 114 mm (4½") Deep

Weight: 794 grams (1¾ lb.)

MODEL M64 Preamplifier—For 120 V.A.C. 50/60 Hz.

MODEL M64-2E Preamplifier—For 240 V.A.C. 50/60 Hz.

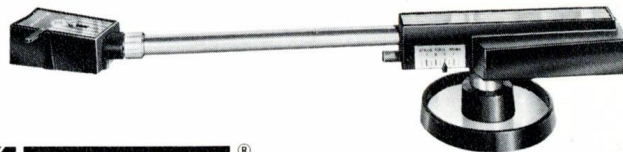


Professional Tone Arm

A quality arm at an unexpectedly low price. Full range of adjustments for static and dynamic balance, cartridge overhang, arm height, etc. Exceptionally easy to install from the top of the motor-board. Recommended for use with cartridges tracking at 1½ grams or more.

MODEL M232 for 12" recordings

MODEL M236 for 16" recordings

MODEL A23H extra plug in head

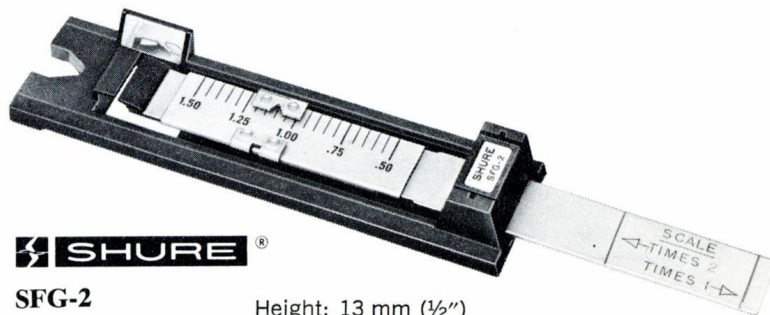

SFG-2 Stylus Force Gauge

Height: 13 mm (½")
Width: 138 mm (5½")
Depth: 25 mm (1")
Weight: 20 grams (0.7 oz.)

Low-cost, precision stylus force gauge is a must for the serious audiophile. Detects excessive or insufficient tracking force; allows precise resetting of stylus force to maintain optimum trackability and sharply reduce wear on records and stylus tip. Especially valuable when cartridges are switched. Accuracy to within 1/10th of a gram in ½ to 1½ gram primary operating range; extended range to 3 grams. The SFG-2 uses friction-free, stainless steel pivot points and easy-to-read reference bars in a permanently accurate "balance" system—no springs to weaken or wear out. Special tilted mirror reflects reference bar positions for effortless, accurate reading. Greater accuracy in measurement is obtained because the SFG-2 is used with the tone arm in actual playing position.

MODEL SFG-2 Stylus Force Gauge

**SHURE
SOLO-PHONE®
Headphone
Amplifiers**



**Model SA-1, SA-2
For Use With The Sound Source of Your Choice**

The Solo-Phone Series was specifically designed for private headphone listening. It is a small, all-transistor pre-amplifier that will deliver the depth and "presence" of high fidelity stereo—in private—from whichever sound source you choose to connect to it: record player, tape recorder or AM/FM tuner. True-to-performance sound is assured by its broad frequency response and exceptionally low distortion, including the difficult low frequencies. Handsome walnut finish with beige face plate.

VERSATILE . . .

Tape, record changer or tuner . . . you can easily vary the sound source. You also can use the Solo-Phone amplifier with one or two sets of headphones, or even with high efficiency speakers, for low-volume background music. Each stereo channel can be adjusted separately to achieve proper balance. U.L. listed. Weighs just 910 g (2 lbs.).

MODEL SA-1 SOLO-PHONE AMPLIFIER:
108-132 V., AC., 260 mm x 89 mm x 76 mm
(10¼" x 3½" x 3"). Less Headphones

MODEL SA-2E
Same as SA-1 except for 120 V. or 240 V., AC, 50-60 Hz. No plug.

MODEL SA-1F SOLO-PHONE FOR PANEL MOUNTING.*
108-132 V., AC., 302 mm x 124 mm x 79 mm
(11⅞" x 5⅝" x 3⅛"). Less Headphones

MODEL SA-2FE
Same as SA-1F except for 120 V. or 240 V., AC, 50-60 Hz. No plug.

*The SA-1F is listed by Canadian Standards Association as certified.

CARTRIDGE SELECTION GUIDE

Just as a chain is no stronger than its weakest link, and a camera only as good as its lens, the quality of your stereo system can be no better than your weakest component.

Case in point: A superb light tracking cartridge operating in a tone arm designed to be used at heavier tracking forces will yield far poorer results than a cartridge designed to track in the correct range of that tone arm.

Conversely, it is a waste to utilize a heavier tracking cartridge (with the resultant increase in stylus and record wear) where a very light tracking cartridge can be used.


It is with this in mind that the following recommendations are made.

CARTRIDGE RECOMMENDATIONS	FOR THESE OPERATING PARAMETERS
V-15 Type III	For ultimate performance in precision quality manual tone arms and automatic turntables capable of tracking at 1¼ grams or less.
M95ED	Second only to V-15 Type III. Use in same general applications when cost is a factor.
M91ED M75ED Type 2	For deluxe performance in high quality manual tone arms and automatic turntables capable of tracking at 1½ grams or less.
M95EJ M75EJ Type 2 M75B Type 2	For custom performance in standard manual tone arms and automatic turntables that operate in the 1½-3 gram tracking force range.
M75ECS	For extra-durable high-track performance in older manual tone arms and record changers requiring 2-4 gram tracking for optimum operation.
M75CS	For upgrading older, heavier tracking cartridges or for maximum economy in virtually any tone arm or record changer tracking from 3-5 grams.
	NOTE: Other Shure cartridges, in the appropriate tracking force range, may be used if preferred.

THE SHURE CARTRIDGES LISTED ABOVE ARE COMPATIBLE WITH ALL FOUR-CHANNEL MATRIX SYSTEMS

STYLUS ASSEMBLY


the
inside
story

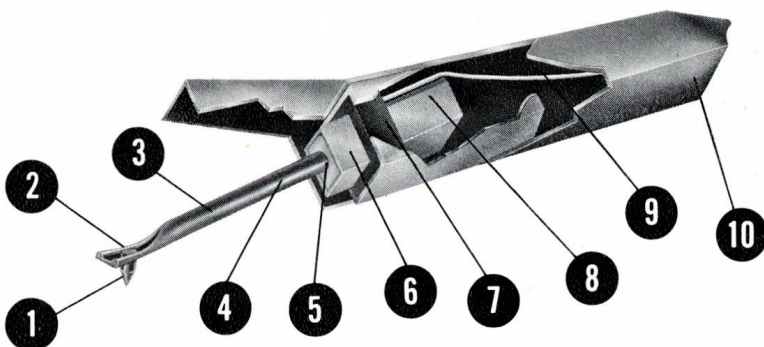

The Shure Stereo Dynetic® Stylus Assembly is a micro-engineering masterpiece that tells your entire stereo system what's happening in the record grooves. It's no simple "needle," but rather a complex miniature assembly made up of seven distinct, interacting sub-components* with an aggregate weight of .01 gram (1/2800 of an ounce), and with an effective mass as low as .33 milligrams (referred to the groove contacting stylus tip). Its manufacturing processes look and sound like science fiction, with electro-discharge machining, annealing, shadowgraph positioning and so on.

* Not counting the stylus grip, guard, or positioning carrier.

THIS... PROTECTS YOUR MOST EXPENSIVE HI-FI INVESTMENT

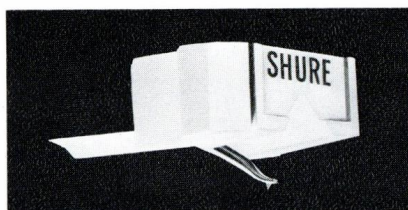

Look for the name SHURE on the stylus grip and the words "This Stereo Dynetic® stylus is precision manufactured by Shure Brothers Inc." on the box.

FREE STYLUS BOOKLET

For more information about Shure styli, send for the authoritative booklet "Small World of the Stylus." Ask for booklet AL402E.

When you buy a replacement stylus, don't be surprised when you find that the cost translates to something like \$20,000 a pound. It's worth it, because all the parts you can't see with a naked eye (shown above) make up what is — pound for pound — the most complex component in your stereo system!

1. Full diamond stone (nude in the Super-Track "Plus" and Deluxe Series)—Equal in quality to the finest quality gem stones. It is precisely shaped and polished, then assembled into an accurately machined mounting—not merely a small chip cemented to the end of the mounting—producing flawless Bi-Radial (elliptical) or spherical styli.

2. Doubly secure mounting—The diamond is first press-fitted, then high-temperature epoxy-cemented to insure permanent axial orientation. No short-cuts are ever used.

3. Ultra-thin-wall tubular stylus bar—Special heat-treated aluminum alloy gives necessary rigidity, with relatively small contribution to mass.

4. Dynamic control lever (hidden)—Optimizes stylus bar compliance. (V-15 Type III, M95, M91 and M75 Type 2 series only).

5. Center-mounted stylus bar—Precisely fitted into electro discharge-machined magnet aperture. (V-15 Type III Series, M95 Series and M91 Series and M75 Type 2 Series only).

6. Pivot control—Assures correct positioning and functioning of bearing and support wire.

7. Viscoelastic suspension block—The "heart" of the bearing. Cyclic temperature variations ranging from -51°C. to 74°C. (-60°F. to 165°F.) will not deteriorate cartridge performance in normal playback environment — nor will humidity adversely affect the performance.

8. High energy Alnico 5W magnet—Super-strong magnetic field allows for smallest size — contributes less than 20% to effective mass of the assembly.

9. Tuned, resonance-free support wire—Does not affect performance within the cartridge's operating range.

10. Stylus assembly carrier—Holds the stylus assembly in precisely the correct position relative to pick-up coils.

NOTE: For information about the uniformity of Shure cartridges and styli, see the "U Factor" explanation on the back cover of this catalog.

GENUINE SHURE REPLACEMENT STYLI

CHECK YOUR SHURE STYLUS PERIODICALLY

True, it's unfortunate . . . and unfortunately, it's true: the diamond tip of ANY high fidelity stylus eventually wears out. Some sooner, some later. The new ultra-lightweight tracking force cartridges ($\frac{3}{4}$ to $1\frac{1}{2}$ grams) extend diamond tip life many times. But even they need periodic inspection. Depending upon the degree of wear, a worn stylus will (at the very least) appreciably accelerate record wear—or it can actually damage a record beyond redemption, in a single playing!

SHURE PERFORMANCE DEPENDS ON A GENUINE SHURE STYLUS

The superior performance of all Shure cartridges depends upon the Shure Stereo Dynetic Stylus Assembly. An inferior stylus replacement will audibly detract from and significantly reduce the cartridge's performance and increase record wear. Obviously, if an imitation Shure Stereo Dynetic Stylus is used, we cannot guarantee that the cartridge will perform to published specifications. Accept no substitute. Look for this wording:

"This Stereo Dynetic Stylus is precision manufactured by Shure Brothers Inc."

HOW TO UPGRADE OLDER SHURE CARTRIDGES WITH A NEW STYLUS

It is possible to actually upgrade your cartridge by using a higher compliance stylus assembly which tracks at lighter force, or by using an elliptical stylus in place of a spherical stylus for reduction of IM, harmonic and tracing distortion. Here are some examples of improvements:

M3D or M7D . . . Substitute N21D stylus for greater compliance, lighter tracking ($2\frac{1}{2}$ grams maximum).

Any M44 Cartridge . . . Substitute N55E stylus for greater compliance and lighter tracking (at $\frac{3}{4}$ to 2 grams). For tracking at $1\frac{3}{4}$ to 4 grams, use the N44E stylus.

Any M71, M73 or M75 Cartridge . . . Substitute N75 Type 2 stylus for higher trackability.

Any M91, M92 or M93 Cartridge . . . Substitute N91ED stylus for lower stylus tip mass and higher trackability at $\frac{3}{4}$ to $1\frac{1}{2}$ grams.

REPLACEMENT DIAMOND STYLI FOR OLDER SHURE CARTRIDGES

MODEL N22D Stylus. 13 microns (.0005") spherical tip radius. Fits M22, M7/N21D, M3D/N21D, M3D and M7D cartridges

MODEL N44-1 Stylus. 25 microns (.0010") spherical tip radius. For mono L.P.'s. Fits M44 series, M55E and V-15 Type I cartridges

MODEL N77 Stylus. 18 microns (.0007") spherical tip radius. Fits M77 cartridge

MODEL VN2E Stylus. Biradial elliptical tip. Fits V-15 Type I

MODEL VN7 Stylus. Spherical tip radius. Fits V-15 Type II-7

MODEL VN15E Stylus. Biradial elliptical tip. Fits V-15 Type II

STYLI FOR 78 RPM RECORDS

If you have a large collection of 78 rpm records, you can equip the M31E, M32E, any M44 series cartridge, M55E, M71, M73, M75, M75 Type 2 series, M91, M92, M93 series, V-15 Type I, II, or III cartridges with a special stylus for 78 rpm records.

MODEL N32-3 Stylus. 63 microns (.0025") spherical tip radius. Fits the M31E and M32E cartridges

MODEL N44-3 Stylus. 63 microns (.0025") spherical tip radius. Fits any V-15 Type I, M44 series or M55E cartridges

MODEL N75-3 Stylus. 63 microns (.0025") spherical tip radius. Fits the M71, M73, M75, M75 Type 2 series and V-15 Type II cartridges

MODEL N91-3 Stylus. 63 microns (.0025") spherical tip radius. Fits the M91, M92, M93, M91GD and M91ED series cartridges


MODEL N95-3 Stylus for monophonic 78 rpm recordings. 63 microns (.0025") spherical tip radius. Fits M95ED and M95EJ cartridges

MODEL VN78E Stylus. 63 microns x 18 microns (.0025" x .0007"). Biradial Elliptical tip radii. Fits V-15 Type III cartridge

All styli designed for use with 78 rpm recordings track between $1\frac{1}{2}$ grams and 3 grams.

REPLACEMENT STYLUS CHART

(All styli are diamond
unless noted otherwise)

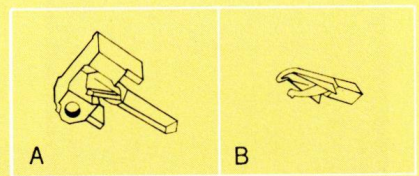


Cartridge Model	Replacement Stylus Model	Stylus Group	Stylus Radius	Stylus Color Code	Tracking Force (grams)
DM101MG	N91GD*	H	15 microns (.0006")	Red	¾ - 1½
DM103ME	N91ED*		†5 microns x 18 microns (.0002" x .0007")	Yellow	¾ - 1½
DU10-M75E Type 2	N75ED Type 2*	E	†5 microns x 18 microns (.0002" x .0007")	Black	¾ - 1½
M1 (Mono LP only)	N1	C	18 microns (.0007")	Orange Dot	1 - 2
M3D	N3D	B	18 microns (.0007")	Ⓐ	3 - 6
M3/N21D	N21D		18 microns (.0007")	Ⓑ	1½ - 2½
M5D (Mono LP only)	N5D	C	25 microns (.001")	Black Dot	3 - 6
M6S (78 RPM only)	N6S		68 microns (.0027") Sapphire	Yellow Dot	3 - 6
M7D	N3D*	B	18 microns (.0007")	Ⓐ	3 - 6
M7DMF	N3D*		18 microns (.0007")	Ⓐ	3 - 6
M7/N21D	N21D		18 microns (.0007")	Ⓑ	1½ - 2½
M8D	N3D*		18 microns (.0007")	Ⓐ	3 - 6
M21	N21D		18 microns (.0007")	Ⓑ	1½ - 2½
M22 (Stereo only)	N22D		15 microns (.0006")	Ⓒ	¾ - 1½
M31E	N31E	G	† 5 microns x 18 microns (.0002" x .0007")	Yellow	1 - 2
M32E	N32E		†10 microns x 18 microns (.0004" x .0007")	Brown	2½ - 5
M32-3	N32-3	D	63 microns (.0025")	Dark Green	2½ - 5
M33-5	N99*		18 microns (.0007")	Gray	1½ - 3
M44C	N44C	A	18 microns (.0007")	Light Blue	3 - 5
M44E	N44E		†10 microns x 18 microns (.0004" x .0007")	Brown	1¾ - 4
M44EM	N44E*		†10 microns x 18 microns (.0004" x .0007")	Brown	1¾ - 4
M44MA	N44-7*		18 microns (.0007")	White	1½ - 3
M44MB	N44-7*		18 microns (.0007")	White	1½ - 3
M44MC	N44C*		18 microns (.0007")	Light Blue	3 - 5
M44MF	N44G*		15 microns (.0006")	Gray	¾ - 1½
M44MG	N44G*		15 microns (.0006")	Gray	¾ - 1½
M44-5	N44G*		15 microns (.0006")	Gray	¾ - 1½
M44-7	N44-7		18 microns (.0007")	White	1½ - 3
M55E	N55E		†5 microns x 18 microns (.0002" x .0007")	Yellow	¾ - 2
M55EM	N55E*		†5 microns x 18 microns (.0002" x .0007")	Yellow	¾ - 2
M71C	N75C*		15 microns (.0006")	Light Blue	3 - 5
M71EB	N75EJ Type 2*	E	†10 microns x 18 microns (.0004" x .0007")	Light Green	1½ - 3
M71EMB	N75EJ Type 2*		†10 microns x 18 microns (.0004" x .0007")	Light Green	1½ - 3
M71MB	N75-6*		15 microns (.0006")	Beige	1½ - 3
M71MC	N75C*		15 microns (.0006")	Light Blue	3 - 5
M71-6	N75-6*		15 microns (.0006")	Beige	1½ - 3
M73G	N75G Type 2*		15 microns (.0006")	Dark Gray	1 - 1½
M73MG	N75G Type 2*		15 microns (.0006")	Dark Gray	1 - 1½
M75BM	N75-6		15 microns (.0006")	Beige	1½ - 3
M75CS	N75C		15 microns (.0006")	Light Blue	3 - 5
M75E	N75ED Type 2*		† 5 microns x 18 microns (.0002" x .0007")	Black	¾ - 1½
M75ECS	N75EC		†10 microns x 18 microns (.0004" x .0007")	Brown	2 - 4
M75E Type 2	N75ED Type 2*		† 5 microns x 18 microns (.0002" x .0007")	Black	¾ - 1½
M75ED Type 2	N75ED Type 2		† 5 microns x 18 microns (.0002" x .0007")	Black	¾ - 1½
M75EJ Type 2	N75EJ Type 2		†10 microns x 18 microns (.0004" x .0007")	Light Green	1½ - 3
M75E-D19	N75ED Type 2*		† 5 microns x 18 microns (.0002" x .0007")	Black	¾ - 1½
M75E-D19 Type 2	N75ED Type 2*		† 5 microns x 18 microns (.0002" x .0007")	Black	¾ - 1½
M75EM	N75ED Type 2*		† 5 microns x 18 microns (.0002" x .0007")	Black	¾ - 1½
M75EM Type 2	N75ED Type 2*		† 5 microns x 18 microns (.0002" x .0007")	Black	¾ - 1½
M75E-P20 Type 2	N75ED Type 2*		† 5 microns x 18 microns (.0002" x .0007")	Black	¾ - 1½
M75E-95G	N75ED Type 2*		† 5 microns x 18 microns (.0002" x .0007")	Black	¾ - 1½
M75E-95G Type 2	N75ED Type 2*		† 5 microns x 18 microns (.0002" x .0007")	Black	¾ - 1½
M75G	N75G Type 2*		15 microns (.0006")	Dark Gray	¾ - 1½
M75G Type 2	N75G Type 2		15 microns (.0006")	Dark Gray	¾ - 1½
M75MB	N75B Type 2*		15 microns (.0006")	Beige	1½ - 3
M75MB Type 2	N75B Type 2		15 microns (.0006")	Beige	1½ - 3
M75MG	N75G Type 2*		15 microns (.0006")	Dark Gray	¾ - 1½
M75MG Type 2	N75G Type 2*		15 microns (.0006")	Dark Gray	¾ - 1½
M75MG-D	N75G Type 2*		15 microns (.0006")	Dark Gray	¾ - 1½
M75 Type D	N75-6		15 microns (.0006")	Beige	1½ - 3
M75-6	N75-6		15 microns (.0006")	Beige	1½ - 3

NOTE: For units not listed, replace cartridge.

Ⓐ Gold Spade—Large Silver Shank

Ⓑ Gold Spade—Small Silver Shank

Ⓒ Silver Spade—Silver Shank

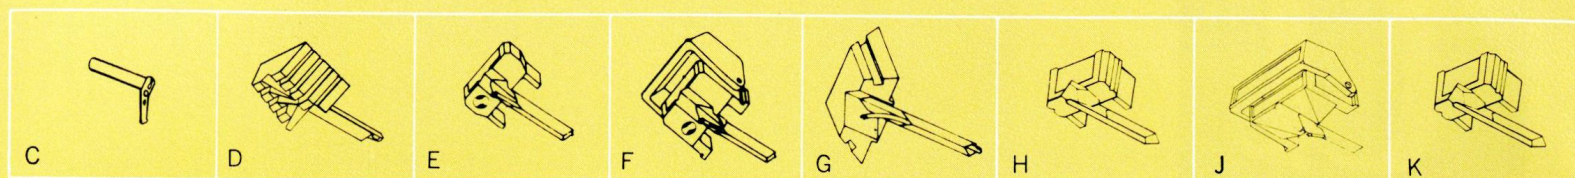

Cartridge Model	Replacement Stylus Model	Stylus Group	Stylus Radius	Stylus Color Code	Tracking Force (grams)
M75B Type 2	N75B Type 2	E	15 microns (.0006")	Beige	1½ - 3
M75-6S	N75-6		15 microns (.0006")	Beige	1½ - 3
M77	N77	D	18 microns (.0007")	Black	3 - 6
M77D	N77*		18 microns (.0007")	Black	3 - 6
M77MD	N77*		18 microns (.0007")	Black	3 - 6
M80E	N55E	A	†5 microns x 18 microns (.0002" x .0007")	Yellow	¾ - 2
M80E-D	N55E		†5 microns x 18 microns (.0002" x .0007")	Yellow	¾ - 2
M80E-D19	N55E		†5 microns x 18 microns (.0002" x .0007")	Yellow	¾ - 2
M81MC	N75C*	E	15 microns (.0006")	Light Blue	3 - 5
M91E	N91E	H	†5 microns x 18 microns (.0002" x .0007")	Black	¾ - 1½
M91ED**	N91ED		†5 microns x 18 microns (.0002" x .0007")	Yellow	¾ - 1½
M91GD**	N91GD		15 microns (.0006")	Red	¾ - 1½
M91MGD	N91GD*		15 microns (.0006")	Red	¾ - 1½
M92E	N91E*		†5 microns x 18 microns (.0002" x .0007")	Black	¾ - 1½
M92G	N91GD*		15 microns (.0006")	Red	¾ - 1½
M93E	N93E		†10 microns x 18 microns (.0004" x .0007")	Light Green	1½ - 3
M95ED	N95ED	K	† 5 microns x 18 microns (.0002" x .0007")	Yellow	¾ - 1½
M95EJ	N95EJ		†10 microns x 18 microns (.0004" x .0007")	Light Green	1½ - 3
M98/A	N44-7	A	18 microns (.0007")	White	1½ - 3
M99/A	N99	D	18 microns (.0007")	Gray	1½ - 3
M99/AT6	N99		18 microns (.0007")	Gray	1½ - 3
M99/M10	N99		18 microns (.0007")	Gray	1½ - 3
R7C	N75C*	E	15 microns (.0006")	Light Blue	3 - 5
R27E	N75ED Type 2*		† 5 microns x 18 microns (.0002" x .0007")	Black	¾ - 1½
R47EB	N75EJ Type 2*		†10 microns x 18 microns (.0004" x .0007")	Light Green	1½ - 3
R700E	N75ED Type 2		† 5 microns x 18 microns (.0002" x .0007")	Black	¾ - 1½
RM910E	N75EJ Type 2*		†10 microns x 18 microns (.0004" x .0007")	Light Green	1½ - 3
RM930C	N75C*		15 microns (.0006")	Light Blue	3 - 5
RS100	N3D*	B	18 microns (.0007")	Ⓐ	3 - 6
RS120E	N32E*	G	†10 microns x 18 microns (.0004" x .0007")	Brown	2½ - 5
RS220E	N31E*		† 5 microns x 18 microns (.0002" x .0007")	Yellow	1 - 2
SL95-M75E Type 2	N75ED Type 2*	E	† 5 microns x 18 microns (.0002" x .0007")	Black	¾ - 1½
V-15	VN2E	A	† 5 microns x 18 microns (.0002" x .0007")	Black	¾ - 1½
V-15 Type II***	VN15E	F	† 5 microns x 18 microns (.0002" x .0007")	Black	¾ - 1½
V-15 II-7	VN7		18 microns (.0007")	Gray	¾ - 1½
V-15 Type III	VN35E	J	†5 microns x 18 microns (.0002" x .0007")	Black	¾ - 1¼
V-15 III-G	VN3-G		15 microns (.0006")	Gray	¾ - 1¼
24-0003EP	N3D*	B	18 microns (.0007")	Ⓐ	3 - 6
24-0044	N44C*	A	18 microns (.0007")	Light Blue	3 - 5

† Elliptical.

* Styli marked with (*) provide equal or better performance than original styli.

** The M91GD and M91ED are identical in performance to the Dual DM101MG and DM103ME.

*** Includes both V15 Type II and V15 Type II (Improved) Models.

PRE-MOUNTED CARTRIDGES

Pre-mounted cartridges feature the V-15 Type III, M91E, M91ED as indicated, already mounted in the tone arm head, ready for instant installation without further assembly.

Turntable Manufacturer	Model	Cartridge	Stylus Model	Tracking Force (grams)	Stylus Radius	Stylus Grip Color Code	Stylus Function
Elac Miracord	770H, 50H, 750, 660H, 660, 630, 625, 620	M91E-50H M91ED-BJ	N91E N91ED	¾ - 1½ ¾ - 1½	5 microns x 18 microns (.0002" x .0007")	Black Yellow	Stereo-Mono LP Stereo-Mono LP
Garrard	SL95B, SL75B, SL72B	M91E-GSL	N91E	¾ - 1½	5 microns x 18 microns (.0002" x .0007")	Black	Stereo-Mono LP
	Zero-100	V-15 III-GZ M91ED-GZ	VN35E N91ED	¾ - 1¼ ¾ - 1½	5 microns x 18 microns (.0002" x .0007")	Black Yellow	Stereo-Mono LP Stereo-Mono LP
Perpetuum- Ebner	PE3060T	M91ED-PT	N91ED	¾ - 1½	5 microns x 18 microns (.0002" x .0007")	Yellow	Stereo-Mono LP



Shure cartridges and the

“U FACTOR”

In addition to their many other individual features, the Shure cartridges shown in this catalog offer the audiophile a uniformity of manufacture and performance that is unique in high fidelity componentry.

We call it the “U” factor . . . U for uniformity. It assures you that not only does the Shure cartridge you have conform precisely to its published specifications, but so does every other Shure cartridge bearing the same model number!

Uniformity doesn't come easily. It takes infinite care in production, and one of the most uncompromising, most comprehensive quality control programs in the high fidelity industry. The simple fact is that *every cartridge or stylus with the Shure name on it either meets all of its specifications or is rejected.*

Thus, a Shure V-15 Type III cartridge will provide superlative performance no matter where it is purchased — from Portland, Oregon to Portland, Maine; from London to Rome; and from Tokyo to Paris to Johannesburg.

And the original sound of any Shure cartridge can be recreated exactly —no matter where the *genuine* Shure replacement stylus is purchased.

The U factor . . . a part of every Shure cartridge and replacement stylus.

SPECIAL NOTE: The Dynetic stylus assembly used in Shure cartridges is the most critical component. To maintain the original performance standards of your cartridge, be certain that any replacement stylus you buy bears the following certification on the package:

“This Stereo Dynetic stylus is precision manufactured by Shure Brothers Inc.”

AVOID INFERIOR IMITATIONS. THEY WILL SERIOUSLY DEGRADE THE PERFORMANCE OF YOUR CARTRIDGE. ALL GENUINE “DYNETIC” STYLI ARE MANUFACTURED BY SHURE BROTHERS INC.

MINNI ELECTRONICS
P.O. Box 41910
NAIROBI

Shure Brothers Inc. • International
222 Hartrey Avenue
Evanston, Illinois 60204 U.S.A.



© 1975, Shure Brothers Inc., Printed in U.S.A.

AL210-P INT.