


# TOSHIBA Tape Recorders

*Toshiba*




© beim Hersteller  
Archiv Michael Otto

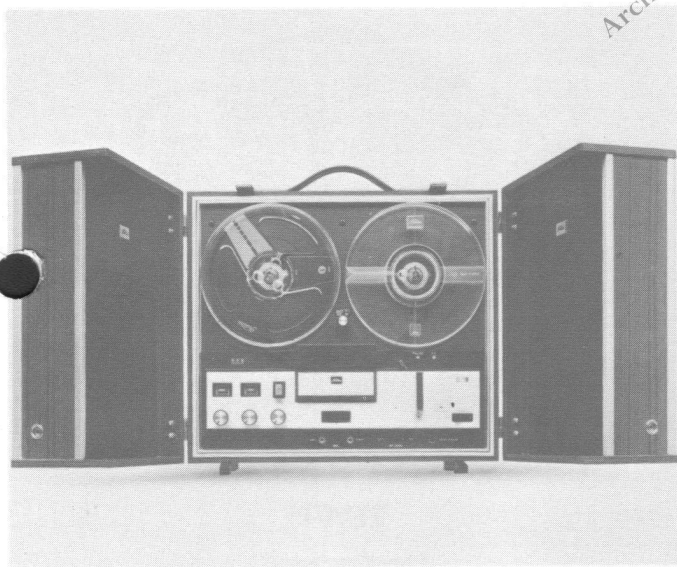

### GT 840 S

**Specifications:**


Track: 4-track, 2-channel  
Reel Size: Up to 178 mm (7")  
Tape Speed: 2 speeds 9.5 & 19 cm/sec.  
Power Source: AC 110/120/200/220/230/240 V,  
50/60 Hz  
Output: 5 W (2 channels)  
Speaker: 9 cm x 15 cm, 8  $\Omega$   
Frequency Response: 70 - 12.500 Hz  
Dimensions: 409 mm (W) x 364 mm (H)  
x 256 mm (D)  
Weight: 13 kg

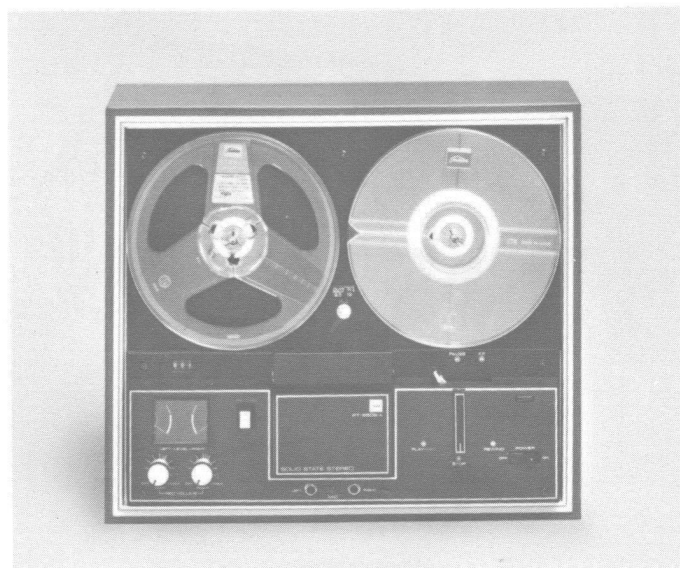

### PT-850 SA

**Specifications:**


Track System: 4 track (2 channel) stereo or mono  
Reel Size: Up to 178 mm (7")  
Tape Speed: 9.5 cm/sec., 19 cm/sec.  
Power Source: AC 110/120/220/240 V, 50/60 Hz  
Output Voltage: 0.5 V x 2  
Frequency Response: 20 - 20.000 Hz  
Dimensions: 391 (W) x 333 (H) x 142 mm (D)  
Weight: 7.5 kg

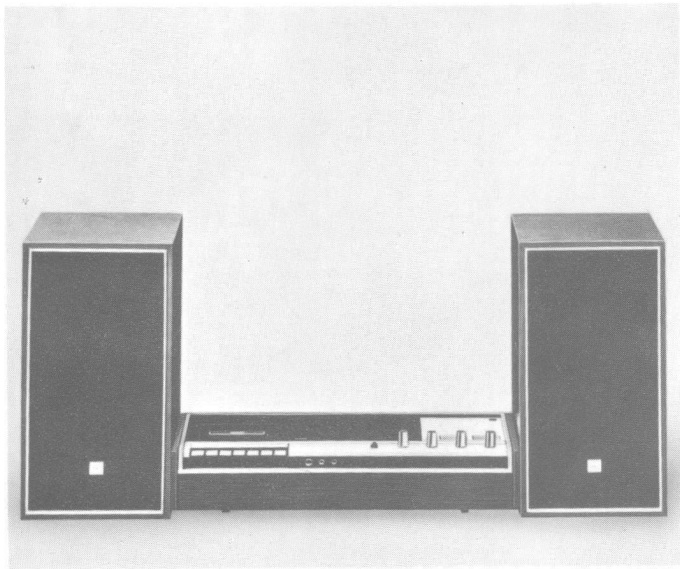

### KT 41

**Specifications:**

Track: 4-track stereo  
 Tape Speed: 4.75 cm/sec.  
 Power Source: AC 110/120/200/220/240 V,  
 50/60 Hz  
 Output: 10 W x 2 (max. for speaker)  
 0.5 V (for DIN jack)  
 Speaker: 2... 160 mm free-edge  
 PMD speaker  
 Dimensions: 490 mm (W) x 120 mm (H)  
 x 215 mm (D)  
 Frequency Response: 50 - 10.000 Hz  
 Weight: 5.2 kg, Speaker  
 3.5 kg x 2

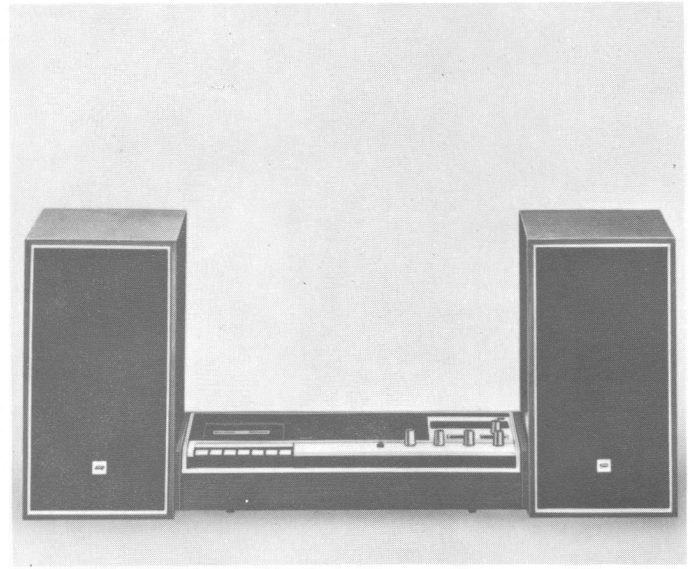


### KT 42 R

**Specifications:**

Track: 4-track stereo  
 Tape Speed: 4.75 cm/sec.  
 Frequency Range: MW: 530 - 1.600 KHz  
 FM: 87.5 - 108 MHz  
 Power Source: AC 110-120/220-240 V, 50/60 Hz  
 Output: 10 W (max. for speaker)  
 0.5 V (for DIN jack)  
 Speaker: 2... 160 mm free-edge PMD speaker  
 Frequency Response: 50 - 10.000 Hz  
 Dimensions: 490 (W) x 120 (H) x 215 mm (D)  
 Weight: 5.4 kg, speaker 3.5 kg x 2


© beim Hersteller  
 Archiv Michael Otto

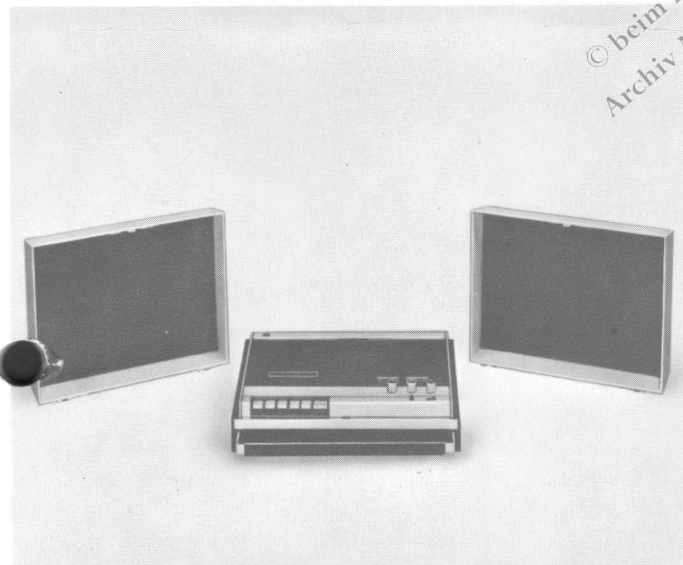

### KT 440

**Specifications:**

Track: 4-track, stereo  
 Tape Speed: 4.75 cm/sec.  
 Power Source: AC 110/120/220/240 V, 50/60 Hz  
 DC UM-1 ("D" size) x 4 (6 V)  
 Output: 1.5 W x 2 (max.)  
 Speaker: 2... 165 mm x 80 mm oval  
 dynamic speaker  
 Frequency Response: 50 - 10.000 Hz  
 Dimensions: 358 mm (W) x 292 mm (H)  
 x 270 mm (D)  
 Weight: 8 kg

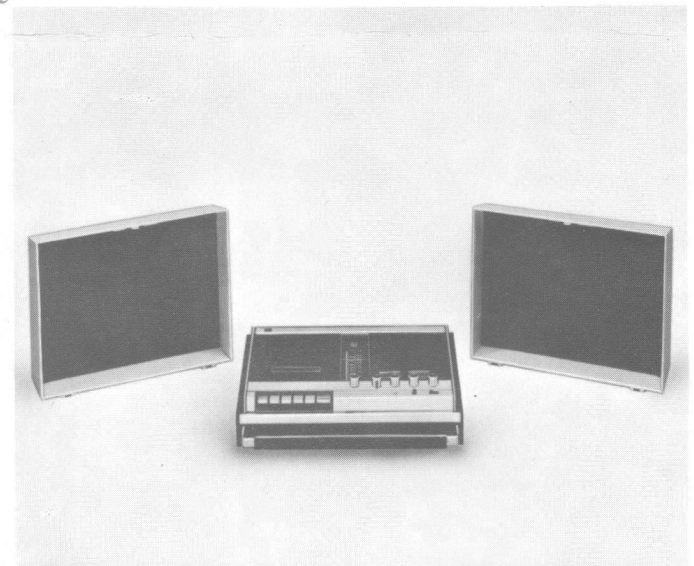

### RT 450 X

**Specifications:**

Track: 4-track, stereo  
 Tape Speed: 4.75 cm/sec.  
 Frequency Range: MW: 530 - 1600 KHz  
 FM: 87.5 - 108 MHz  
 Power Source: AC 110/120/220/240 V, 50/60 Hz  
 DC UM-1 ("D" size) x 4 (6 V)  
 Power Output: 1.5 W x 2 (max.)  
 Speaker: 2... 165 x 80 mm oval speaker  
 Frequency Response: 50 - 10.000 Hz  
 Dimensions: 358 (W) x 292 (H) x 270 mm (D)  
 Weight: 7.3 kg



### KT 43 D

**Specifications:**

Track: 4-track Stereo (compatible with monaural)  
 Tape Speed: 4.75 cm/sec.  
 Power Source: AC 110/120/200/220/230/240 V  
 50 or 60 Hz  
 Output: 0.5 V x 2  
 Frequency Response: 50 - 10.000 Hz  
 Dimensions: 306 mm (W) x 105 mm (H)  
 x 206 mm (D)  
 Weight: 3.7 kg




### KT 80

**Specifications:**

Track: 8-track (4-channel) Stereophonic  
 Tape Speed: 9.5 cm/sec. (3<sup>3</sup>/<sub>4</sub> ips)  
 Power Source: AC 110/120/200/220/230/240 V,  
 50/60 Hz  
 Output: 0.5 V x 2  
 Dimensions: 319 mm (W) x 132 mm (H)  
 x 209 mm (D)  
 Frequency Response: 50 - 12.000 Hz  
 Weight: 4.2 kg


© beim Hersteller  
 Archiv Michael Otto

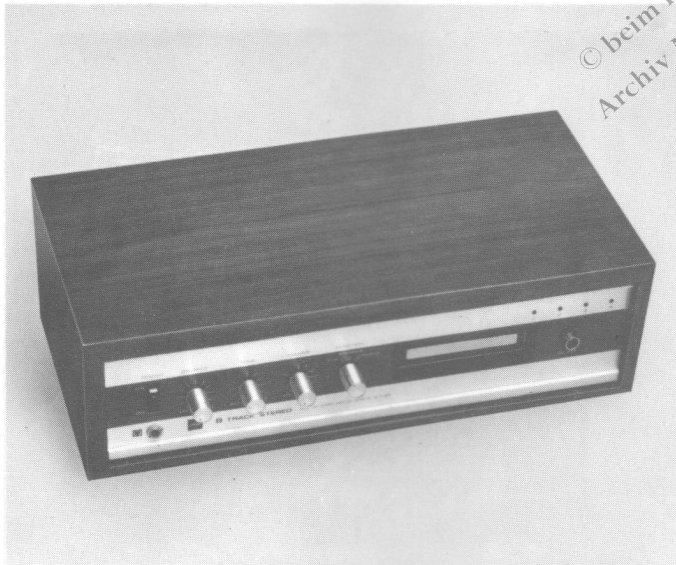

### KT 81

**Specifications:**

Track: 8-track (4-channel) stereo  
 Tape Speed: 9.5 cm/sec.  
 Power Source: AC 110/120/200/220/230/240 V,  
 50/60 Hz  
 Output: 10 W x 2 (R. M. S. non-clip)  
 Frequency Response: 50 - 12.000 Hz  
 Speaker: Optional  
 Dimensions: 418 mm (W) x 132 mm (H)  
 x 210 mm (D)  
 Weight: 5.5 kg

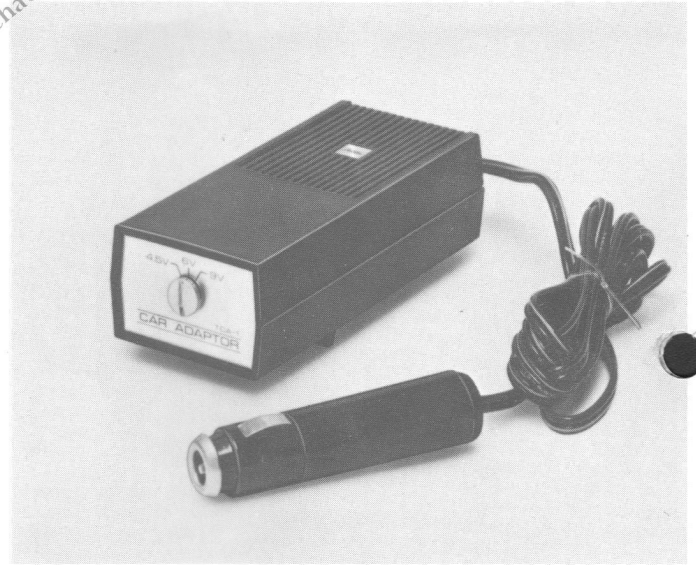

### TCA-I

**Specifications:**

Input Voltage: Rated battery voltage:  
 12 V (10.8 - 16.8 V)  
 Rated Output voltage (1) 9 V 900 mA  
 and Current: (2) 6 V 500 mA  
 (3) 4.5 V 400 mA  
 Dimensions: 58 (W) x 36 (H) x 130 mm (D)  
 Weight: 300 g