

8 TRACK RECORD/PLAYBACK DECK KT-805

- 8-track stereo recording device
- Convenient automatic shut off mechanism
- REPEAT button for repeat reproduction of same channel
- Fast forward, four times faster than recording speed
- Push-button cartridge ejection for easy cartridge removal
- Professional slide type level controls
- Large, easy-to-see, accurate level meter




© beim Hersteller
Archiv Michael Otto
HiFi-Classic.de

8 TRACK RECORD/PLAYBACK DECK **KT-805**

SPECIFICATIONS

GENERAL

Power source:	AC 110/120/220/220 V, 50 or 60 Hz
Usable tape:	8-track cartridge
Tape speed:	9.5 cm/sec. (3 $\frac{3}{4}$ ips)
Track & channel:	8-track, 2-channel
Bias & erasure:	AC 60 kHz
Input jack:	Microphone, Line-input, DIN
Output jack:	Line-output, Stereo Headphone, DIN
Motor:	Long life DC motor
Controls:	Slide recording level, power switch
Operations:	F.F., REPEAT, EJECT, Program SELECT
Auxiliary device:	2-recording level meter
Semiconductor:	10 transistors, 8 diodes
Dimensions:	391(W) × 139(H) × 255(D) mm (15 $\frac{3}{8}$ " × 5 $\frac{1}{2}$ " × 10")
Weight:	5.8 kg (12 $\frac{3}{16}$ lbs.)
Accessory:	Head cleaning stick, owner's manual

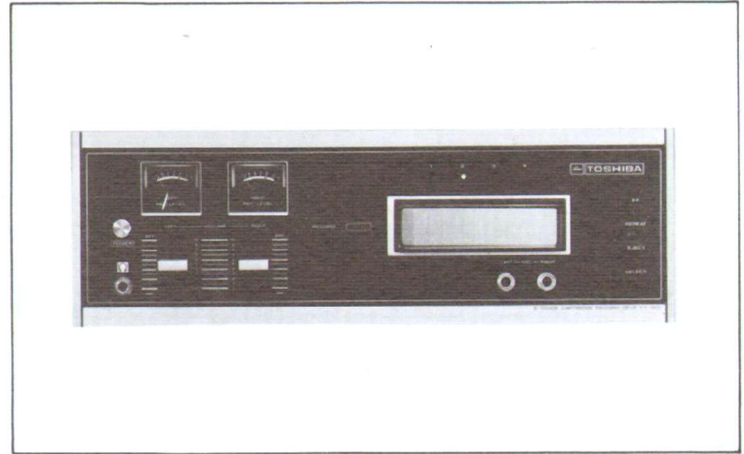

PERFORMANCE

Output level & impedance:	Line-out; 0.5 V, 10 k Ω DIN-out; 0.5 V, 10 k Ω Headphone 0.2 mW, 8 Ω
Frequency response:	50–10,000 Hz
Tape speed tolerance:	+2% –1%
Wow & flutter:	0.15% w.r.m.s.
Cross talk:	55 dB
Channel separation:	50 dB
Signal-to-Noise ratio:	45 dB
Erasure:	55 dB
Input level & impedance:	Line-in; 0.1 mV, 1M Ω DIN-in; 10 mV, 100 k Ω MIC; 0.5 mV, 10 k Ω
FF time:	9.5 cm/sec. × 3

© beim Hersteller
Archiv Michael Otto
HiFi-Classik.de