

For Further Details Contact:

Box

H-6

KONICA



REOVD
1/73



KONICA CAMERA CORP.: Woodside, N.Y. 11377

Burbank, Calif. 91502

KONISHIROKU PHOTO IND. CO., LTD.: Tokyo

Printed in Japan



KONICA C35 ACTUAL SIZE

Incredibly small! Delightfully lightweight! Perfectly dependable! It's the fun camera preferred by professionals!

Carry it with you always, to capture romantic moments, picturesque sights, fleeting impressions.

Record it all on color or black and white prints, or breathtaking slides.

YOU AND YOUR KONICA C35

... an unbeatable team!



COMBINED RANGE VIEWFINDER

The big, bright, single-window viewfinder tells you everything. A rangefinder image in the center of the picture frame quickly snaps into focus, for needle-sharp pictures every shot. You also see, in the viewfinder:

- Shutter speed and aperture settings.
- Warning against over- or under-exposure.
- Indicator that shows when you are set for flash.




AUTOMATIC EXPOSURE CONTROL

Perfect exposures are assured by a highly sensitive CdS cell meter, which automatically sets optimum lens aperture and shutter speed. All you do is focus and shoot. Easy!



CLOSE-UP PHOTOGRAPHY


Attach the Konica Auto-Up to the front of your C35 lens, and you can focus and shoot as close as 19". Vivid close-ups of flowers, striking portraits, large-image copying and a host of other applications are added with this low-cost accessory.

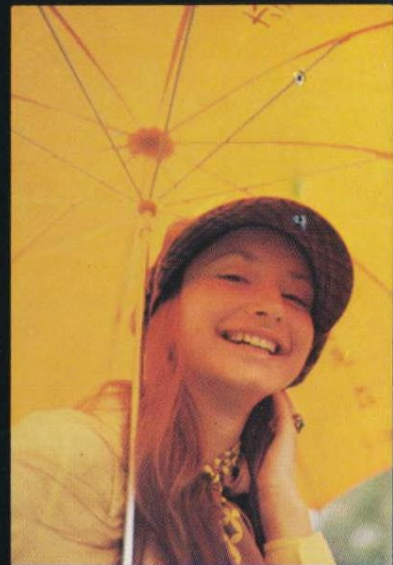



UNDERWATER PHOTOGRAPHY

The Konica C35 Marine Capsule opens the world of underwater adventure to you. Now your C35 can shoot at depths of up to 125 feet! Continuous shots from a full roll of film are simple, because oversize controls on the Capsule exterior put the film advance, focusing and shutter release operations at your fingertips. It even has a special underwater viewfinder for fast and easy aiming and composing. It's as automatic as your C35!

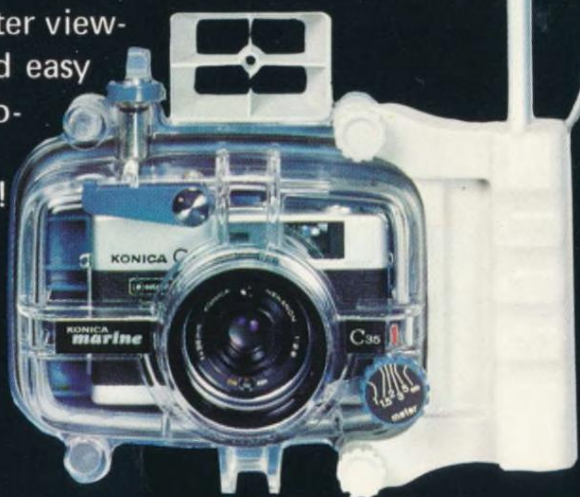

STEP INTO YOUR OWN PICTURES

The built-in self-timer* lets you set the C35, then gives you ten seconds to step into the scene, before automatically releasing the shutter. You need never again be the one left out of all your own pictures!



*ONLY C35 AUTOMATIC

FEATURE	C35 AUTOMATIC	C35 V
LENS	Hexanon 38mm f/2.8; 4-element, 3-group design. Lens has Konica's exclusive Color Dynamic Coating, which practically eliminates flare and glare.	Same as C35 A
SHUTTER	Copal B Mat programmed automatic shutter with combined behind-the-lens aperture and shutter blades. Shutter speed and lens openings continuously variable and automatically selected. Shutter speed range 1/30 to 1/650 sec. plus B (Bulb) time exposure (only at full lens opening). "X" flash synchronization at 1/25 sec. for flashcubes, AG-1 bulbs, or strobe. Built-in self-timer.	Copal B Mat programmed automatic shutter, B, 1/30-1/650 sec., stepless speed change. Automatically set to 1/25 sec. for flash, "X" contact. No self-timer.
ELECTRIC EYE	Automatic exposure adjustment controlled by sensitive CdS cell mounted in lens barrel. Light acceptance angle matched to lens angle of view. Exposure System selects optimum combination of lens opening and shutter speed from EV 8 (f/2.8, 1/30 sec.) with ASA 100 film. Film speed scale ASA 25-400 (DIN 15-27).	Same as C35 A
FOCUSING	Coupled, double-image, superimposed rangefinder combined with viewfinder. Effective base line 12mm. Closest focusing distance 3.3 feet.	By zone adjustment through distance scale reflected into viewfinder; click stops at different distances. Closest focusing distance 3.3 feet.
FILM ADVANCE	Lever-operated, single stroke, rapid film advance with automatic cocking, frame counting, and double exposure prevention. Folding film rewind crank. Self re-setting frame counter.	Same as C35 A
FLASH	Auto Flashmatic System automatically activated when flash gun or electronic flash is inserted into the cordless, "hot shoe" flash contact.	Aperture Value Measuring System, (the aperture is set by the guide number in conjunction with camera-to-subject distance). Aperture scale for flash: 2.8, 4, 5.6, 8, 11 and 16. Cordless "hot shoe" flash contact.
FILM	Accepts any standard 35mm film.	Same as C35 A
FILTER	Lens mount is threaded for 46mm screw-in filters. Automatic filter factor compensation.	Same as C35 A.
DIMENSIONS	112 x 70 x 52mm (4-2/5" x 2-3/4" x 2")	Same as C35 A
WEIGHT	380 gr. (13.4 ounces)	340 gr. (12 ounces)

★ Hard case is also available.



AUTOMATIC FLASH PHOTOGRAPHY

The Konica C35 Flashmatic system makes flash photography easier than ever!

Whether you use electronic flash or ordinary bulbs, the correct lens aperture is automatically set as you focus through the rangefinder. It's as easy as snapping your flash attachment into the "hot," cordless, flash shoe of your C35 A.

Designed to match the Konica C35 for compactness and foolproof operation, the **KONICA X-14 ELECTRONIC FLASH** is the low-cost answer to flash photography. More than 200 flashes from a single pair of inexpensive batteries! Fire away without the cost or bother of changing flashbulbs. Now, flash is more fun!





Orgin archive.org