



Garrard 95B

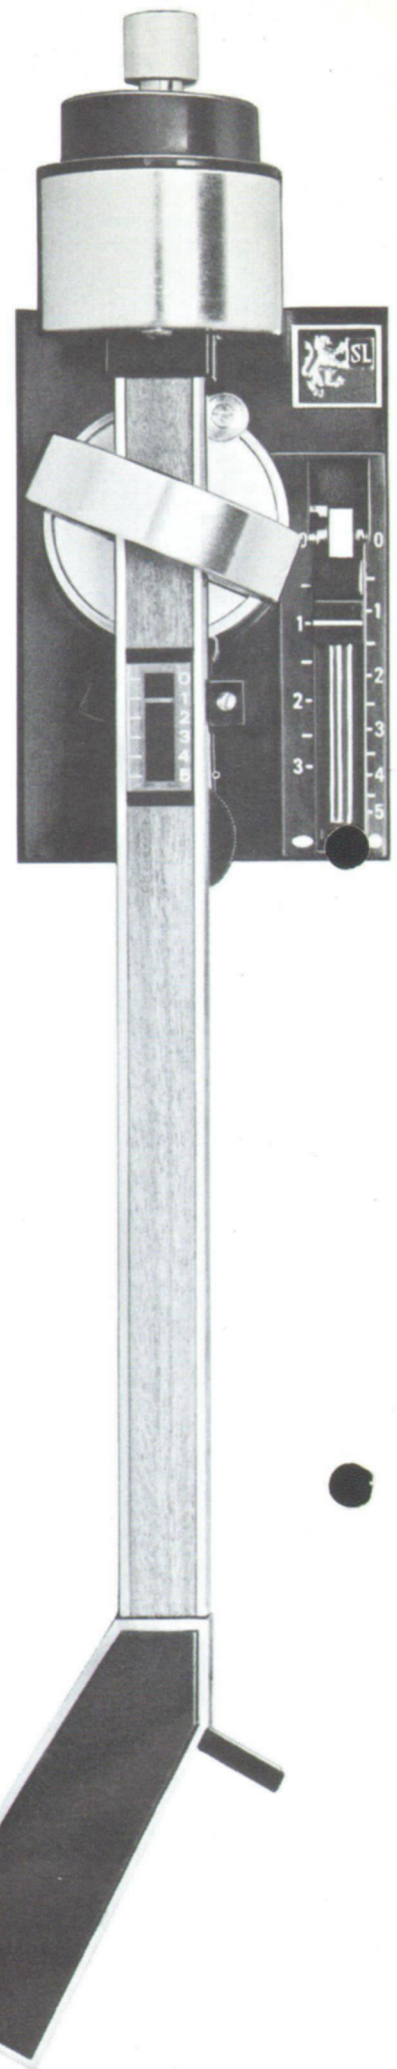

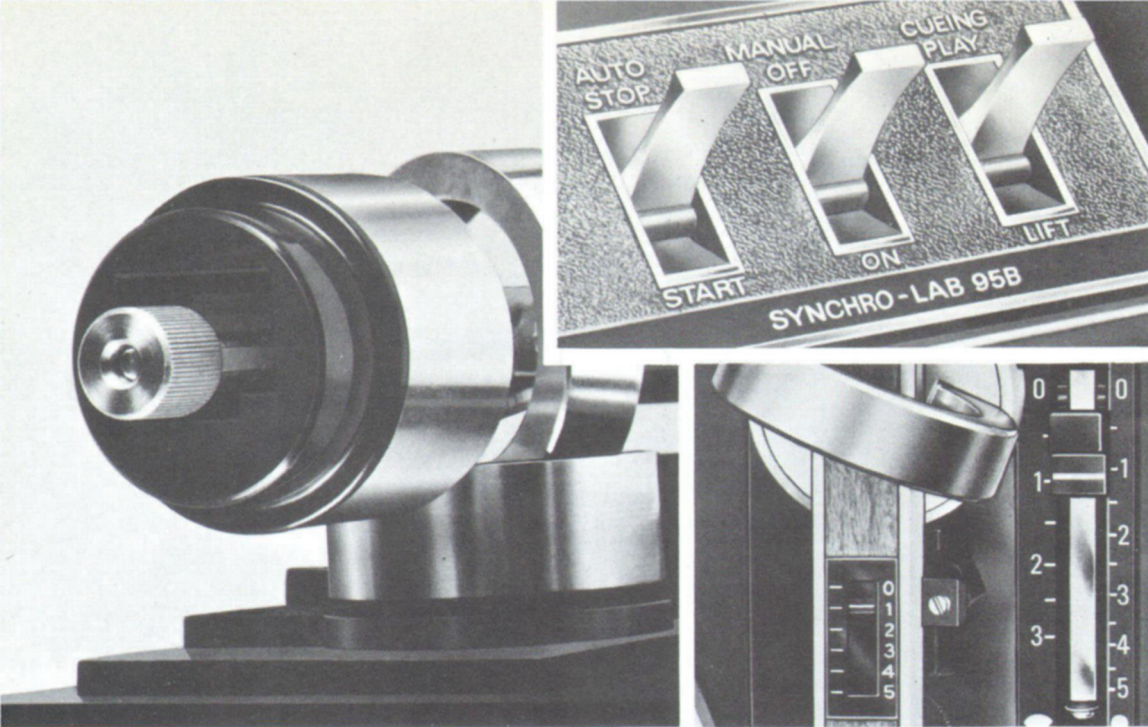

Garrard SL95B

- Type:**
Automatic transcription changer
- Motor:**
4-pole synchronous
- Drive:**
Rubber intermediate wheel
- Power requirements:**
110 to 125V, 220 to 240V
50Hz or 60Hz
- Power consumption:**
9 watts (approx.)
- Mains switch:**
Double pole switch with suppressor
- Turntable:**
Aluminium platter 292 mm/11½ in.
- Spindles (supplied):**
Stepped auto spindle
Manual spindle
Large centre-hole record single play adaptor
- (optional extra):**
Large centre-hole record, automatic play spindle LRS. 100
- Record play:**
Plays up to six records automatically and single records automatically or manually as required
- Record speeds:**
33⅓, 45 and 78 rev/min.
- Record size selector:**
Manual linked with speed selector
- Pickup arm:**
Aluminium channel section with Afrormosia wood trim
Resiliently mounted counter-balance weight
Precision loaded ball bearing pivots
Slide-in cartridge carrier C2

- Stylus force:**
Calibrated 0 to 5 gm. in ¼ gm. increments
Minimum recommended 1.0 gm.
- Bias compensator:**
Calibrated for spherical and elliptical styli
- Cue and pause:**
Damped action
- Performance:**
© beim Hersteller
Wiederholer
Wow and flutter better than 0.1% R.M.S.
Rumble (relative to 1.4 cm/sec @ 100Hz) better than -49 dB
- Dimensions (approx.):**
389 mm/15⅝ in. wide,
359 mm/14⅛ in. front to rear,
105 mm/4⅛ in. above and 75 mm/2⅙ in. below lower edge of unit plate
- Base and cover (optional extra):**
Low resonance base with teak style trim
Injection moulded lift-off hinged cover
- Overall dimensions of base and cover (approx.):**
454 mm/17⅞ in. wide,
405 mm/15⅙ in. front to rear
181 mm/7⅛ in. high in closed position and 432 mm/17 in. in open position.
Unit can be played with cover closed if short manual spindle is used

Garrard 
A PLESSEY QUALITY PRODUCT

Garrard, Newcastle Street,
Swindon, Wiltshire, England. Telephone: Swindon 5381
Plessey Consumer Electronics Division